



100 % Recyclable



Eco-Friendly



Weather Resistance



Highly Durable



Termite Resistance



Anti-Slip



*Exterior
Solutions*

PROMINANCE
UNICEIL
WALL · CEILING · FACADE

INTRODUCING

UNICEIL

TRANSFORMATIVE ENGINEERING WELCOMES YOU

Uniceil presents WPE range of products, where design meets engineering mastery. Crafted with a legacy of patented products. WPE redefines decking, louvers, and railing systems through innovation, strength, and elegance. Each profile reflects precision, durability, and unmatched aesthetic appeal. Engineered with multi-chambered for superior durability and UV resistance, WPE ensures long-lasting performance with eco-conscious materials. From natural textures to modern finishes, every element is designed to enhance both form and function. WPE by Uniceil - blending technology, sustainability, and timeless design to create architectural solutions that elevate every space with excellence and distinction.

ZIGMA

PIONEER IN SCIENTIFIC WASTE MANAGEMENT

Established in 2015, Zigma Global Environ Solutions is a progressive environmental engineering firm committed to transforming India's waste landscape. Led by a team of visionary entrepreneurs, we specialize in scientific waste management solutions that focus on bio-mining and plastic waste repurposing. Our innovative approach helps municipal bodies reclaim legacy dump sites, restore degraded land, and reduce the burden on landfills. Simultaneously, we convert recovered plastic waste into durable, wood-alternative products, supporting sustainable construction and circular economy goals. At Zigma, we blend engineering excellence with environmental responsibility to drive cleaner cities, restored ecosystems, and a landfill-free future.





OUR PHILOSOPHY

WHERE VISION MEETS RESPONSIBILITY

We envision a nation free from plastic-filled landfills, where innovation, technology, and ecological consciousness converge. Our mission is to redefine waste as a resource and deliver environmentally responsible solutions that reflect global standards and local relevance.

BIO-MINING EXCELLENCE

RECLAIMING LAND RESTORING BALANCE.

Zigma Global Environ Solutions stands at the forefront of sustainable legacy waste management with its pioneering bio-mining solutions. Guided by a vision to transform outdated dumpsites into productive, pollution-free land, our approach seamlessly integrates scientific precision with environmental responsibility.

By harnessing advanced technologies, engineering expertise, and strategic collaborations with civic bodies, we are redefining how urban India addresses the long-standing challenge of accumulated municipal solid waste. At Zigma, bio-mining is not merely about waste removal, it is about land restoration, ecological renewal, and empowering cleaner, healthier communities for the future.

- Scientific Legacy Waste Management
- Engineered Waste Segregation Partnership
- With Civic Bodies
- Land Reclamation & Redevelopment
- Environmental Impact Reduction
- Compliance & Sustainability Scalable & Replicable Model

WHY US ?

- Only Indian Product Complying with European Norms
- Superior Moisture Resistance
- Exceptional Bending Strength
- Termite Proof & Biological Resistance
- Algae & Fungi Resistance
- High Weather Resistance
- Anti-Slip Surface
- Proven Mechanical & Thermal Stability

UNICEIL


Powered By



A Call to Collaborate

Let's Redefine Progress Responsibly

Uniceil invites architects, developers, and institutions to join hands in creating a cleaner, more conscious India. Together, we can leave a legacy of sustainability for cities, for people, and for generations to come.

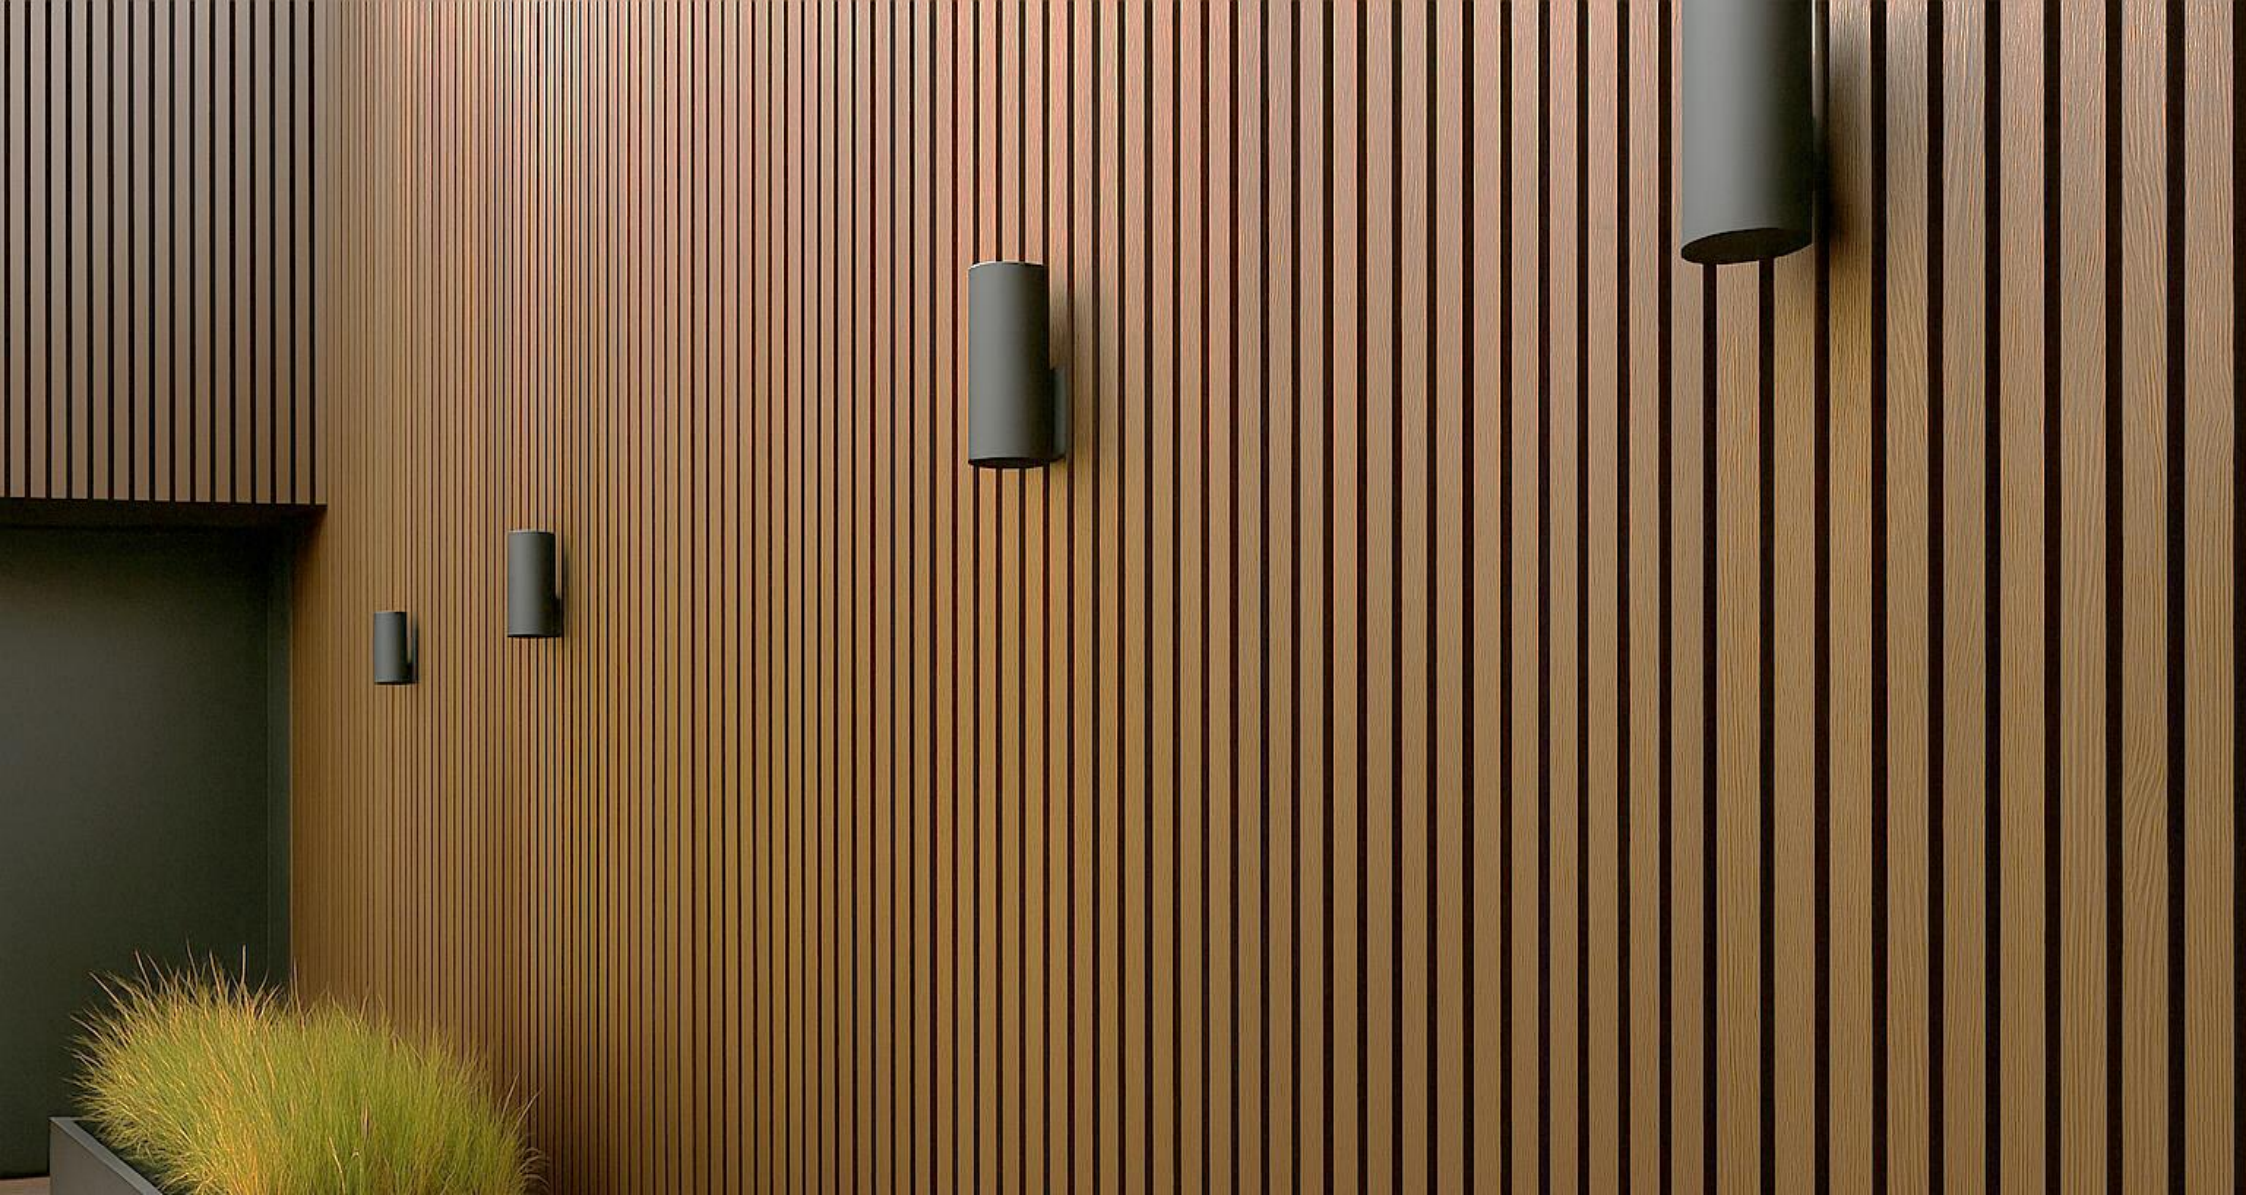

The WPE Advantage

Crafted for Beauty. Engineered for Endurance.

Wood-Poly Ethelene (WPE) range is where sustainability meets sophistication. Designed to replicate the timeless elegance of natural wood, our WPE products offer superior strength, durability, and weather resistance, an ideal choice for modern exterior and architectural applications. Built from recycled materials and engineered to withstand the elements, WPE represents a conscious shift toward eco-smart design without compromise.




Transforming any space with Natural Charm

Experience the multi-application potential


Discover the endless design possibilities with a material that blends durability, elegance, and effortless maintenance. From interiors to exteriors, it captures the natural warmth and timeless beauty of wood, enhancing every space it touches. Ideal for façades, ceilings, walls, and outdoor structures, its versatility empowers architects and designers to explore creativity without limits. Crafted for superior performance and engineered to last, this innovative wood solution retains its authentic charm while freeing you from the burden of regular upkeep.

Louvers-Co Ex

Elite Clad- 4 L
ZWC - EL - 4L




Elite Clad- 5 L
ZWC - EL - 5L




Elite Clad- 6 L
ZWC - EL - 6L



Elite Clad – Flat
ZWC - ELF - 1




**Elite Clad
Outer Corner Trim**
ZWC - OCT - 1




Decking-Co Ex


**Elite Deck
Halo Woodline-140**
ZWD - EL - HW - 01




**Elite Deck
Halo Woodline-146**
ZWD - EL - HW - 02





**Elite Deck
Base Woodline-146**
ZWD - EL - BW - 01



Elite Plank
ZWE - EL - WL - 01



Elite 90
ZWA - EL - 01



Available Shades



Autumn Red



Amber Grove



Golden Caramel



Silver



Slate



Charcoal


Standard Length - 2.9 Meters

Surface Finish - Matt

Decking-Mono Ex


Prime Deck Base Woodline

ZWD - PR - BW - 01




Prime Deck Base Dual Track

ZWD - PR - BD - 02




Endura Deck Halo Woodline

ZWD - EN - HW - 01




Endura Deck Halo Dual Track

ZWD - EN - HD - 02





Prime Plank

ZWE - PR - WL - 01





Fine 90

ZWA - FI - 01




Track 90

ZWA - TR - 01



Joist


ZWJ - BL - 01



Railing-Mono Ex


Rail Post

ZWR - RP - 01




Horizontal Rail

ZWR - HR - 01



Baluster

ZWR - BL - 01



Available Shades



Copper Wood



Maple Mist

Standard Length - 2.9 Meters

Surface Finish - Brushed

Louvers Co-Extrusion

Brushed Embossing



Autumn Red

Charcoal

Slate

Silver

Amber Grove

Golden Caramel

Available in 6 Shades

**Actual product colours and textures may vary slightly from printed images due to printing limitations.*

Feel the Grains , See the Elegance

WPE Co-extruded Louvers redefine exterior façades with a seamless fusion of natural elegance and engineered resilience. Each profile is crafted with advanced co-extrusion technology, where a high-performance outer cap is molecularly bonded to a robust core — creating superior protection against UV radiation, moisture, and environmental wear. The result is a façade element that retains its luxurious finish and vibrant tone even under extreme climatic conditions.

Decking Co-Extrusion

Wood Grain Embossing



Brushed Embossing



Available in 6 Shades & 2 Textures

**Actual product colours and textures may vary slightly from printed images due to printing limitations.*

Touch that Tells a Story

Co-extrusion technology gives every WPE decking surface its own character — a smooth, refined texture you can feel and lasting performance you can trust. The outer protective layer is seamlessly bonded to the core during extrusion, delivering exceptional resistance to UV rays, moisture and scratches. Unlike conventional WPE, co-extruded decking retains its rich color and flawless finish for years without fading or peeling. Each profile reflects precision craftsmanship — a perfect fusion of natural wood aesthetics and advanced polymer durability, symbolizing strength, sustainability, and timeless design excellence.

Decking Mono-Extrusion

Wood Grain Embossing



Maple Mist



Copper Wood

Available in 2 Shades

**Actual product colours and textures may vary slightly from printed images due to printing limitations.*

Crafted with Nature’s Touch

WPE mono-extruded decking is crafted to capture the timeless beauty of natural wood while delivering exceptional durability and performance. Made from a balanced blend of recycled wood fibers and premium polymers, each board showcases a warm, authentic wood-grain appearance that feels natural underfoot. Built to withstand termites, decay, and moisture, this decking stands firm against harsh weather conditions and daily wear. Its waterproof and UV-resistant composition ensures lasting color stability and elegance — without the need for painting or polishing.



Applications

Elegant Facade




 Easy Installation

 Seamless Finish

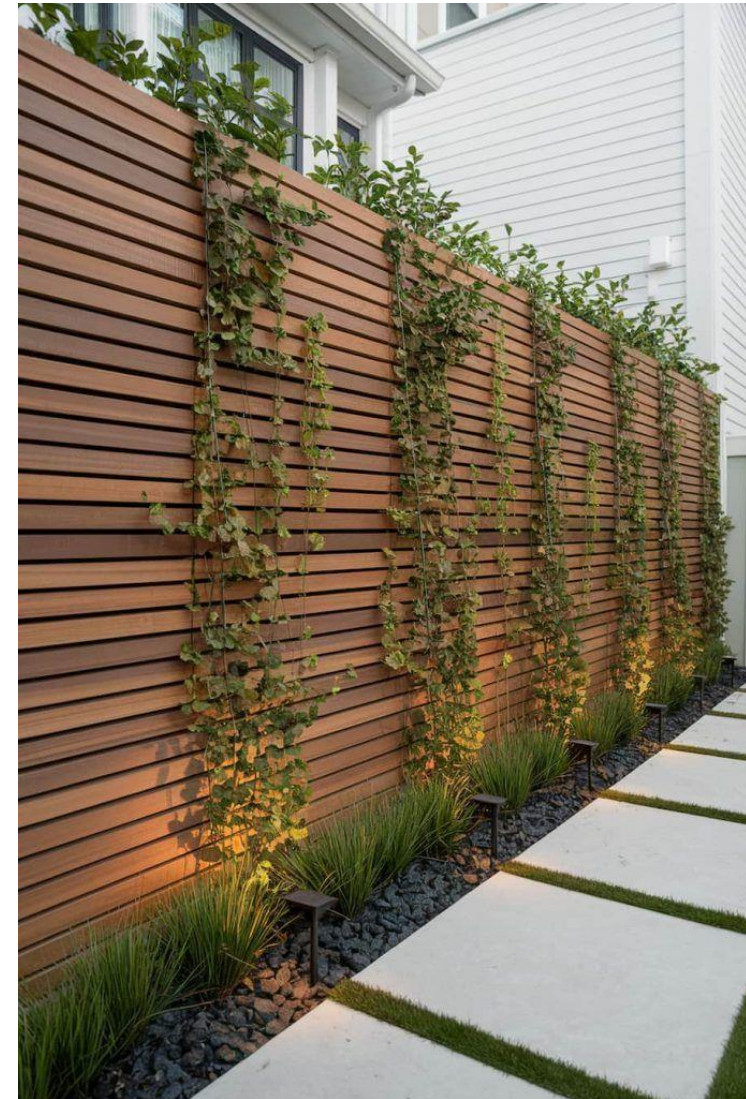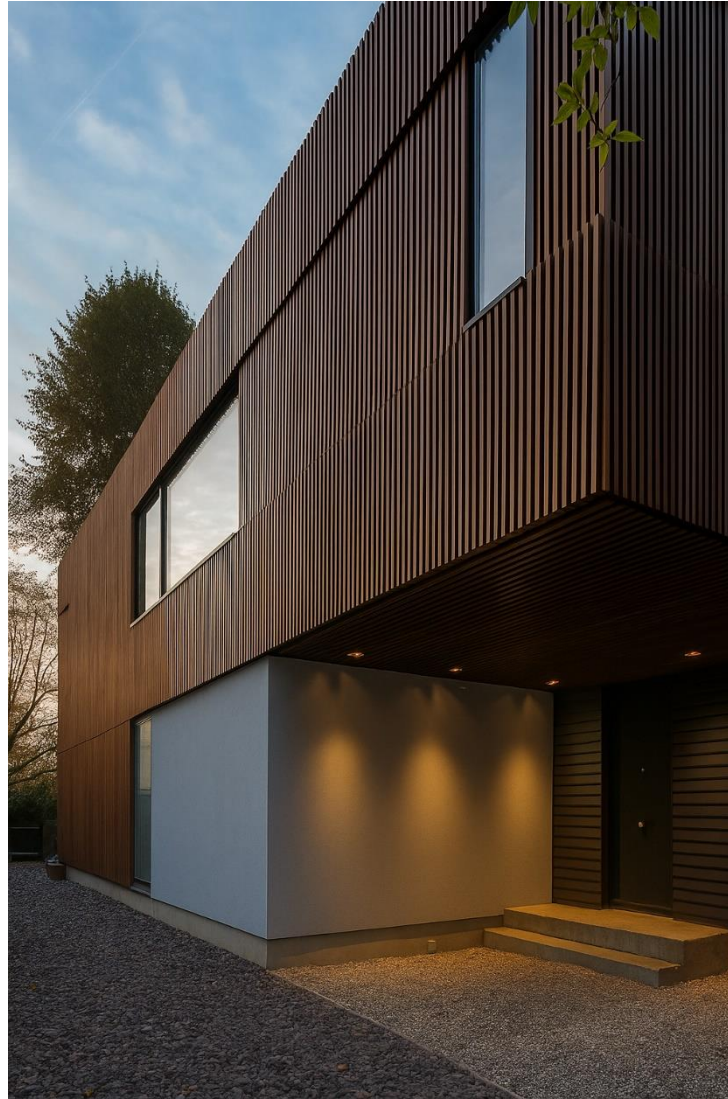


Applications

Landscape Decking



 Weather Resistance

 Anti-Slip

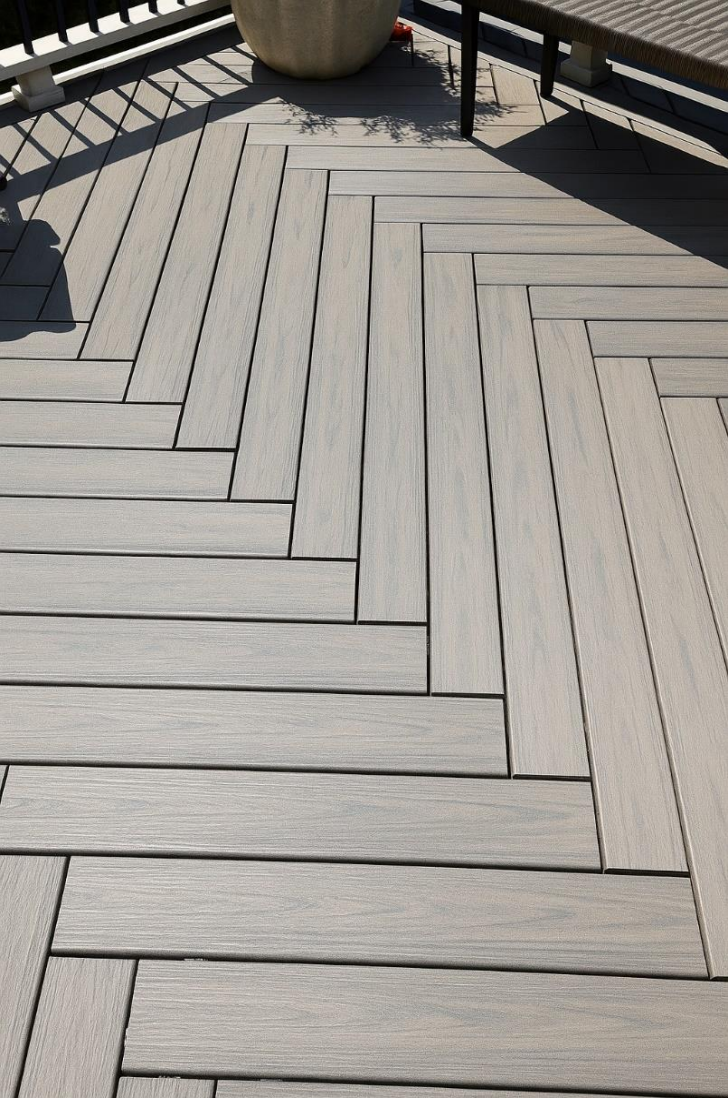

Applications

Exterior seating



 Everlasting Beauty

 Anti Termite




Applications

Gates



 Easy Installation

 Classic Wooden Finish

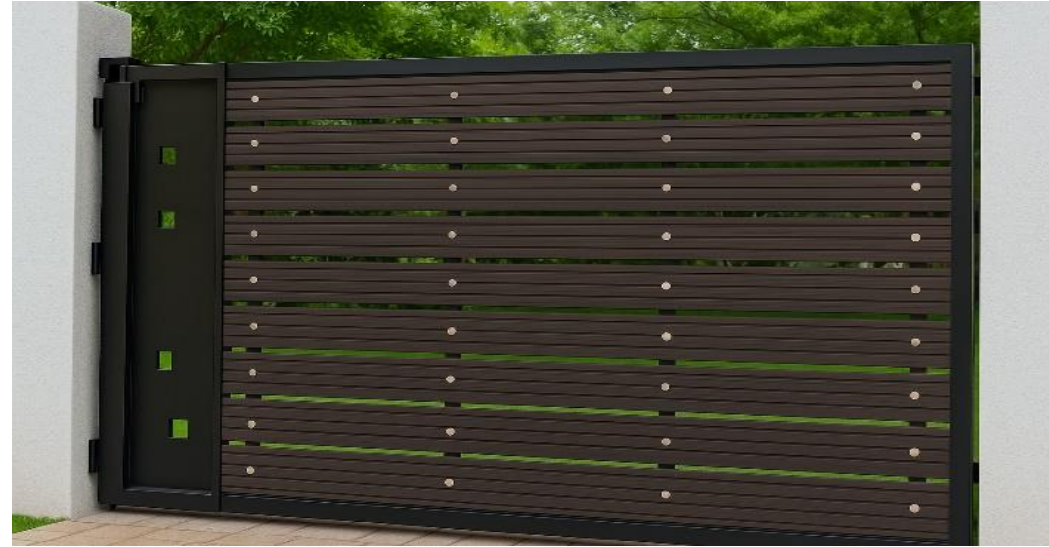

Applications


Railing



Natural Wood Elegance



Sustained Durability

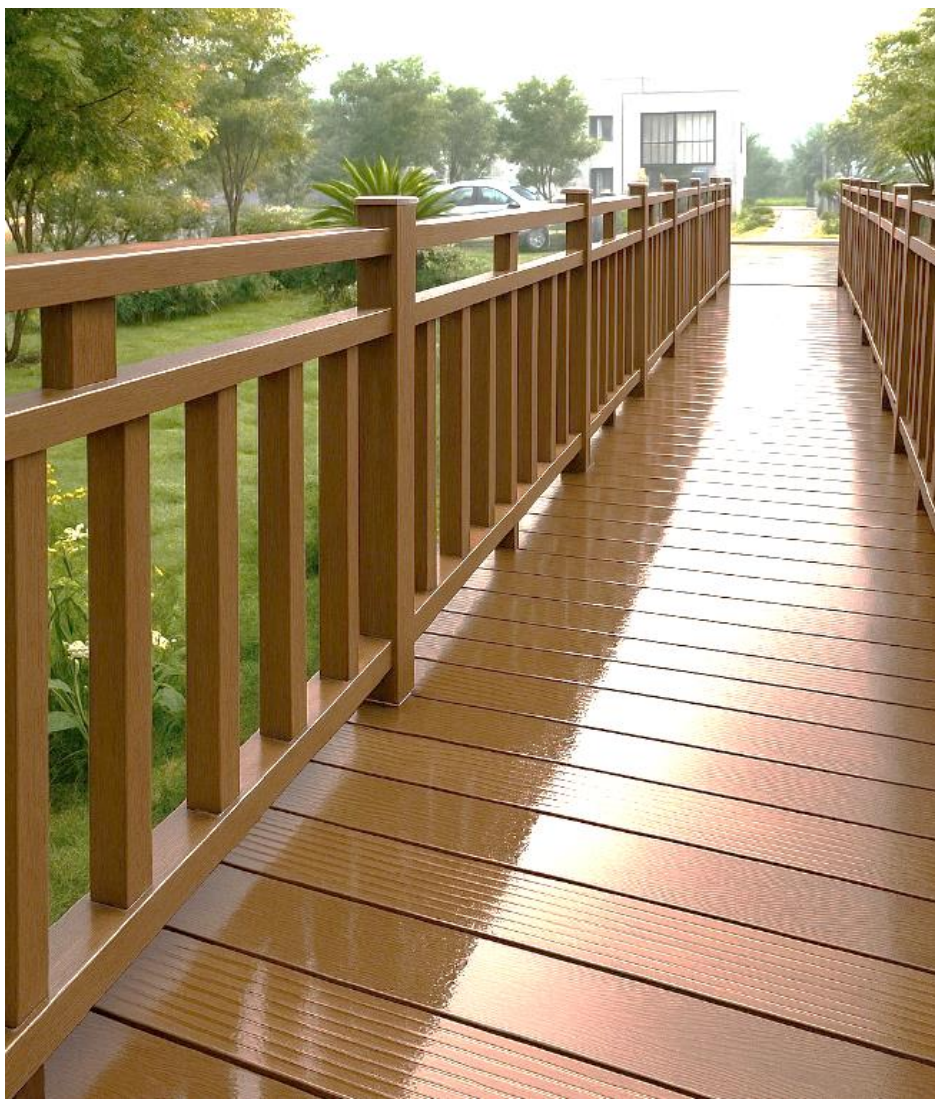

Applications


Fencing



Long-Lasting Strength



Authentic Wood Effect

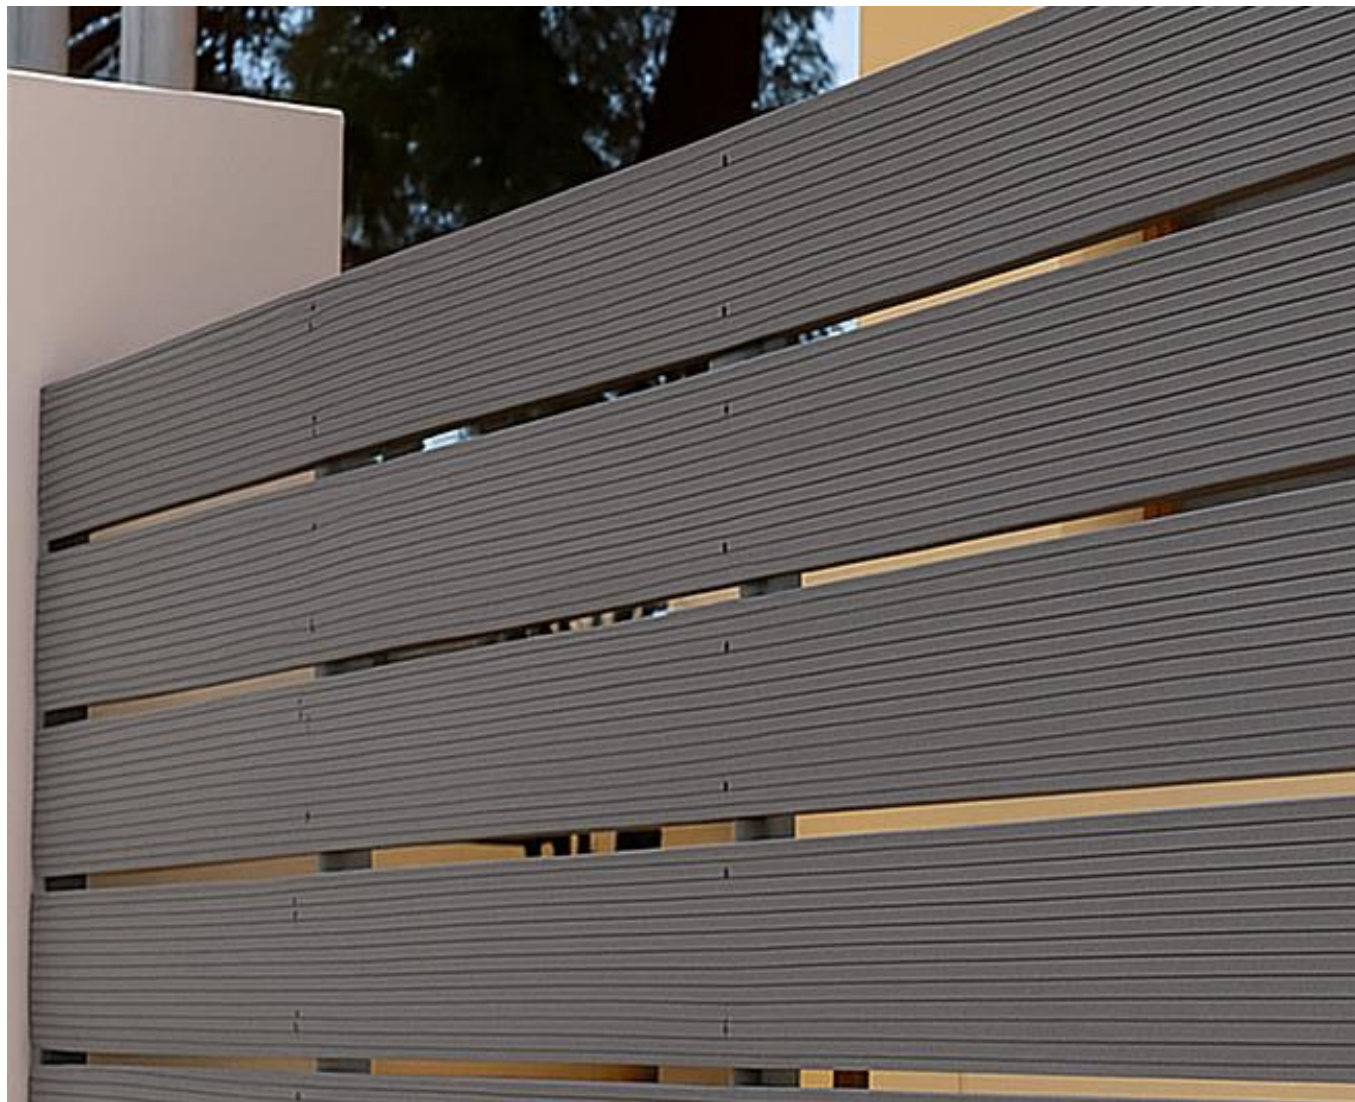

Applications

Kiosk



Built to Last



Classic Wood Aesthetic



Test Report



List of Tests	Test Method	Passing Range	Result
Appearance	EN 15534-1 6.1	The specimen should not exhibit any cracks, blisters, or other visible defects	Pass
Physical characteristics Test			
Pendulum test	EN 15534-1 6.4.2	Pendulum value ≥ 36	Longitudinal direction: 45 Horizontal direction: 57
Inclination plan test	EN 15534-1 6.4.3	$\geq 24^\circ$ Class - C	Angle: 29.1 Rating Class - C
Dynamic coefficient of friction (Dry Condition)	EN 15534-1 6.4.4	≥ 0.43	0.47
Linear mass	EN 15534 -1 6.5	Individual values $\geq 95\%$ of declared value by the manufacturer.	Pass
Dimensions	EN 15534-1 6.6.2	Thickness: 25 ± 0.5 mm Width: 140 ± 1 mm Length: 2900 ± 5 mm	Thickness: 25.03 mm Width: 140.05 mm Length: 2900.12 mm
Deviation from straightness of 1 meter Profile	EN 15534-1 6.6.3	≤ 1.5 mm	0.54 mm
Cupping	EN 15534-1 6.6.4	≤ 0.5 mm	0.15 mm
Mechanical characteristics Test			
Falling mass impact resistance	EN 15534-1 7.1.2.1	None of 10 test specimens shall show a failure with a crack length ≥ 10 mm or a depth of residual indentation ≥ 0.5 mm.	No crack Residual Indentation = 0.10 mm
Flexural properties Test			
Flexural properties	EN 15534-1 Annex A	F'max: Mean ≥ 3300 N Deflection under a load of 500 N Mean ≤ 2.0 mm	Maximum load Mean: 4353 N Deflection at 500 N Mean: 1.22 mm
Creep behaviour (Known span in use)	EN 15534-1 7.4.1	$\Delta S \leq 10$ mm (mean value) $\Delta S \leq 13$ mm (individual values) $\Delta S_r \leq 5$ mm (mean value)	$\Delta S = 4.38$ mm (mean value) $\Delta S = 4.90$ mm (individual values) $\Delta S_r = 4.35$ mm (mean value)
Creep behaviour (Unknown span in use)	EN 15534-1 7.4.2	Mean Cf ≤ 6 Coefficient of variation $\leq 15\%$ Mean Erc $\geq 30\%$ Coefficient of variation $\leq 15\%$	Mean Cf : 1.19 Coefficient of Variation: 4 % Mean Erc : 49 % Coefficient of Variation : 7 %

Test Report



List of Tests`	Test Method	Passing Range	Result
Durability Test			
Resistance against biological agents	EN 15534-1 8.5.2	To comply clause EN 15534-4 Clause 4.5.4	The sample exhibited resistance to biological agents suitable for use class 3 and class 4
Resistance to artificial weathering @2000 hours	EN 15534-1 8.1	ΔE^* value not to Exceed 5	$\Delta E^* = 4.9$
Moisture resistance under cyclic test conditions	EN 15534-1 8.3.2	Mean of decrease of bending strength $\leq 20\%$ Individual decrease of bending strength $\leq 30\%$	Mean of decrease of bending strength : 11.7% Individual decrease of bending strength : 13.6%
Swelling and Water absorption (28 days immersion)	EN 15534-1 8.3.1	Mean swelling in dimensions: $\leq 4\%$ in thickness $\leq 0.8\%$ in width $\leq 0.4\%$ in length Mean water absorption: $\leq 7\%$ in weight	Mean swelling in dimensions: 0.65 % in thickness 0.04 % in width 0.06 % in length Water Absorption: 0.27%
Moisture Resistance Boiling test	EN 15534-1 8.3.3	Mean value of water absorption $\leq 7\%$ in weight Individual values of water absorption $\leq 9\%$ in weight	Mean value of water absorption: 0.46 % Individual values of water absorption: 0.53 %
Thermal properties Test			
Linear thermal expansion coefficient	EN 15534-1 9.2	$\leq 50.10^{-6} K^{-1}$	$34.10^{-6} K^{-1}$
Additional characteristics Test			
Heat reversion @ 100 °C For 60 min	EN 15534-1 9.3	$< 2\%$	0.21%
Reaction to fire-Single flame source test & Spread of flame - Radiant heat source	EN 15534-1 9.6.1 & 9.6.3	Critical flux (transverse) $\geq 4.5 Kw/m^2$ Critical flux (longitudinal) $\geq 4.5 Kw/m^2$ S1= Smoke $\leq 750\%$ x Min Fs ≤ 150 mm with 20 Sec.	Critical flux (transverse)=7.6 Kw/m ² Critical flux (longitudinal) = 7.2 Kw/m ² Smoke production =209 % Fs = 40 mm
Resistance against discolouring micro-fungi	EN 15534- 1 8.5.4 & 8.5.5	Rating Scale 0 No growth or discoloration	Nigar: Rating Scale 0 Funiculosum: Rating Scale 0 Mixed Fungi : Rating Scale 0
Resistance against discolouring algae	EN 15534-1 8.5.6	Scale: 0	No growth
Heat build-up	EN 15534-1 9.4	-	Predicted heat build-up $\Delta T: -3.1^\circ C$
Resistance to indentation	EN 15534-1 7.5	-	Brinell Hardness = 71.65 Mpa Rate of Elastic Recovery = 69%
Resistance against termites	EN 15534-1 8.4	No surface etching observed and no deep penetration observed	Pass
Resistance to salt spray @100hrs.	EN 15534-1 8.6	≤ 3	Grey Scale 4-5
Formaldehyde Content	EN 717-3:1996	Not Detected	Pass


■ EN Standards VS ■ Uniceil

FALLING MASS IMPACT TEST

Standard: EN 15534-1, Section 7.1.2.1

Definition:

This test assesses the impact resistance of WPE profiles by subjecting them to a controlled drop of a specified mass from a defined height. The profile is examined for cracks, fractures, or permanent deformation to determine its ability to withstand sudden mechanical shocks.

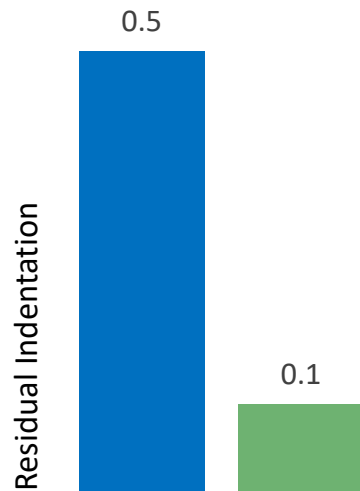

100 % Compliance achieved with Zero breakage out of 10 Profiles

Consequence of Non-Compliance:


Cracks or significant indentations indicate poor impact resistance, leading to reduced durability and potential safety hazards in load-bearing or high-traffic applications.

PENDULUM TEST

Standard: EN 15534-1, Section 6.4.2

Definition:

This test measures the slip resistance of the WPE profile surface, especially under wet conditions, to ensure safe foot traction. A pendulum device simulates heel strike on the surface, and the resulting Pendulum Test Value (PTV) is recorded to assess compliance with safety standards.

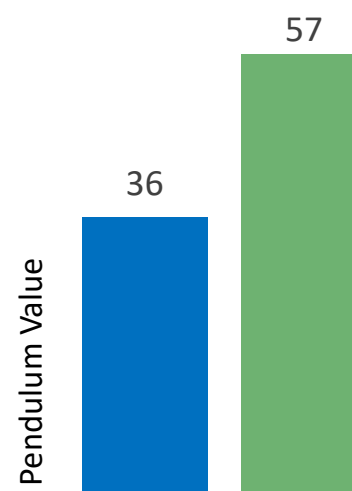

58 % Higher than Standard Requirement

Consequence of Non-Compliance:


Low slip resistance increases the risk of slips and falls, making the product unsafe for pedestrian use in outdoor or wet environments

FLEXURAL PROPERTIES

Standard: EN 15534-1, Annex A

Definition:

This test evaluates the flexural performance of WPE profiles by determining two key parameters: Modulus of Elasticity (MOE): Measures stiffness and resistance to bending. Modulus of Rupture (MOR): Indicates the maximum stress the profile can withstand before breaking. The test is typically conducted under three-point bending conditions to simulate real-world loading scenarios.

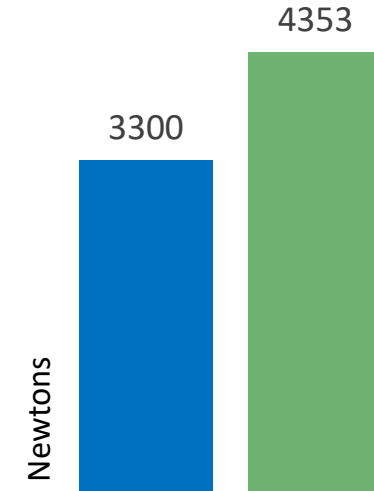

32 % Higher than Standard Requirement

Consequence of Non-Compliance:

Low MOE results in excessive deflection under load, while low MOR increases the risk of cracking or failure. These weaknesses reduce structural reliability and long-term performance in demanding applications


■ EN Standards VS ■ Uniceil

MOISTURE RESISTANCE TEST

Standard: EN 15534-1, Section 8.3.2

Definition:

This test evaluates a product's durability under cyclic moisture and temperature conditions, simulating long-term environmental exposure. It measures variations in bending strength and modulus of elasticity after repeated immersion, freezing, and drying. Specimens are immersed in water at $(20 \pm 1)^\circ\text{C}$ for 28 days, then frozen for 24 hours and dried for 72 hours. Two similar cycles follow. After final conditioning, mechanical properties are compared with initial values to determine resistance to environmental stress.

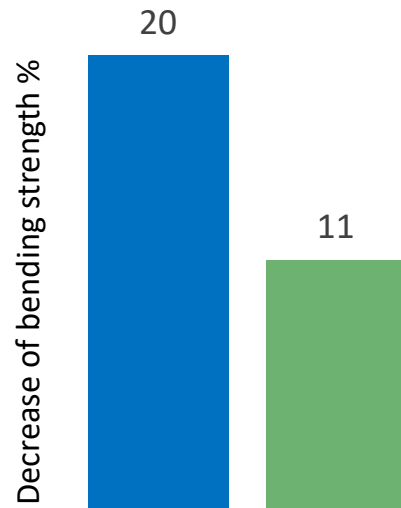

45 % Competent than Standard Requirement

Consequence of Non-Compliance:


Significant reduction in mechanical strength or stiffness indicates poor resistance to weathering, increasing the risk of cracking, warping, or failure in outdoor use..

WATER ABSORPTION TEST

Standard: EN 15534-1, Section 8.3.1

Definition:

This test evaluates dimensional stability and water uptake of a product or compound during prolonged water exposure. Specimens are immersed in water at $(20 \pm 2)^\circ\text{C}$ for up to 28 days. Swelling is measured in thickness, width, and length, while water absorption is calculated by weight gain over time intervals (24h to 28 days).

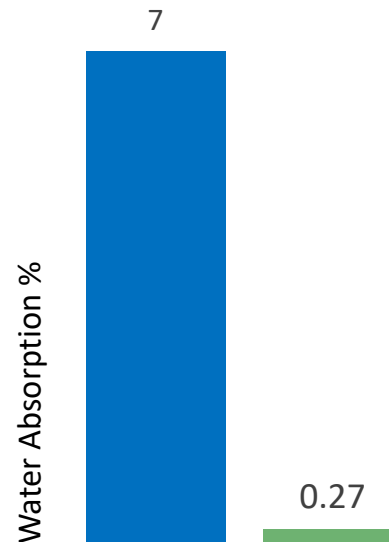

96 % Competent than Standard Requirement

Consequence of Non-Compliance:


Excessive swelling or water absorption indicates low dimensional stability and can lead to warping, surface failure, or reduced lifespan in wet or outdoor conditions.

Boiling Test

Standard: EN 15534-1, Section 8.3.3

Definition:

This test simulates severe environmental conditions to evaluate rapid water absorption, swelling, and structural stability under thermal shock. Specimens are fully immersed in boiling water for a specified duration, then cooled and measured for dimensional changes and weight gain.

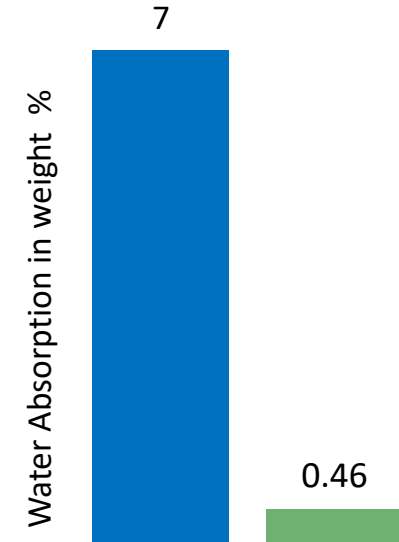

93 % Competent than Standard Requirement

Consequence of Non-Compliance:

High absorption or swelling under boiling conditions signals poor resistance to thermal-moisture stress, increasing the risk of weakening, deformation, or failure in harsh outdoor or high -humidity environments.


■ EN Standards VS ■ Uniceil

THERMAL EXPANSION COEFFICIENT

Standard: EN 15534-1, Section 9.2

Definition:

This test determines the extent of dimensional change in a profile due to temperature variation, measured from -20 °C to +80 °C using a TMA or dilatometer (ISO 11359-2). The coefficient of linear thermal expansion (CLTE) reflects thermal movement, crucial for outdoor or fluctuating climates.

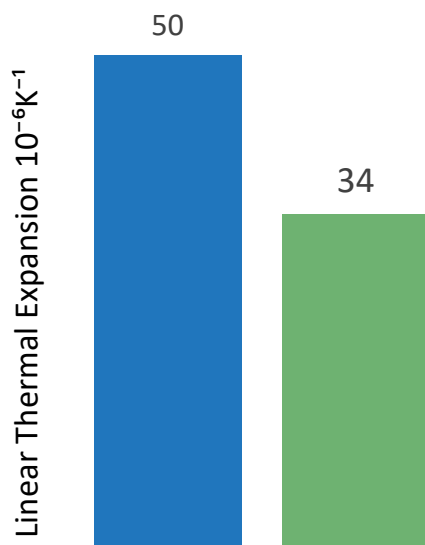

32 % Competent than Standard Requirement

Consequence of Non-Compliance:


A high Co-efficient of Linear Thermal Expansion indicates excessive thermal expansion or contraction, leading to warping, joint stress, or dimensional instability in real-world installations.

REACTION TO FIRE

Standard: EN 15534-1, Section 9.6.1 & 9.6.3

Definition:

The Single Flame Source Test assesses the ignitability of WPE profiles by exposing them to a small vertical flame without radiant heat, determining ease of ignition and flame height. The Radiant Heat Source Test evaluates flame spread and smoke generation under strong radiant heat, measuring the critical heat flux for surface fire propagation.

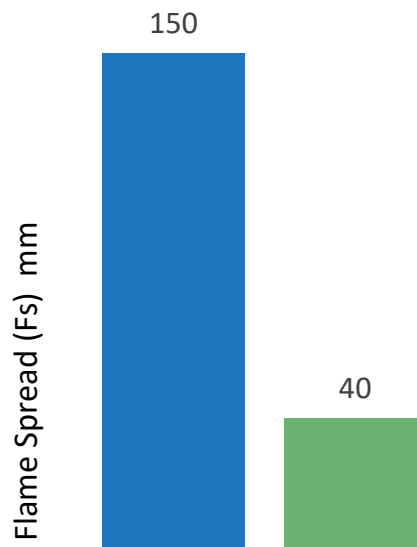

73 % Higher than Standard Requirement

Consequence of Non-Compliance:


Products with easy ignition or rapid flame spread are unsuitable for fire-sensitive areas like façades or public interiors, risking regulatory rejection, restricted usage, and adverse effects on certification and insurance compliance.

HEAT REVERSION

Standard: EN 15534-1, Section 9.3

Definition:


This test assesses the dimensional stability of profiles at elevated temperatures, typically at 100 °C, as per EN 479. Specimens are exposed to heat for a defined period, and the percentage of length change (Reversion) is measured to evaluate thermal integrity.

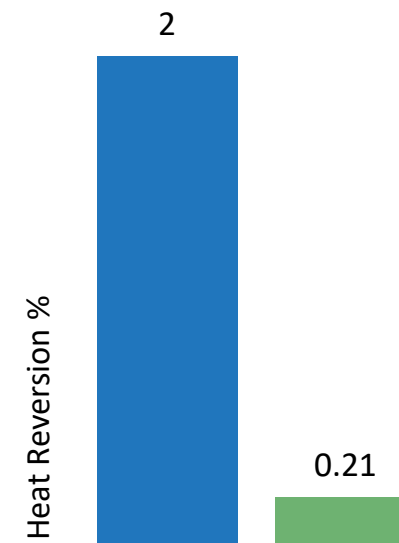

89 % Competent than Standard Requirement

Consequence of Non-Compliance:

Excessive heat reversion signals poor thermal stability, leading to distortion, warping, or improper fit—especially critical in applications exposed to high temperatures.

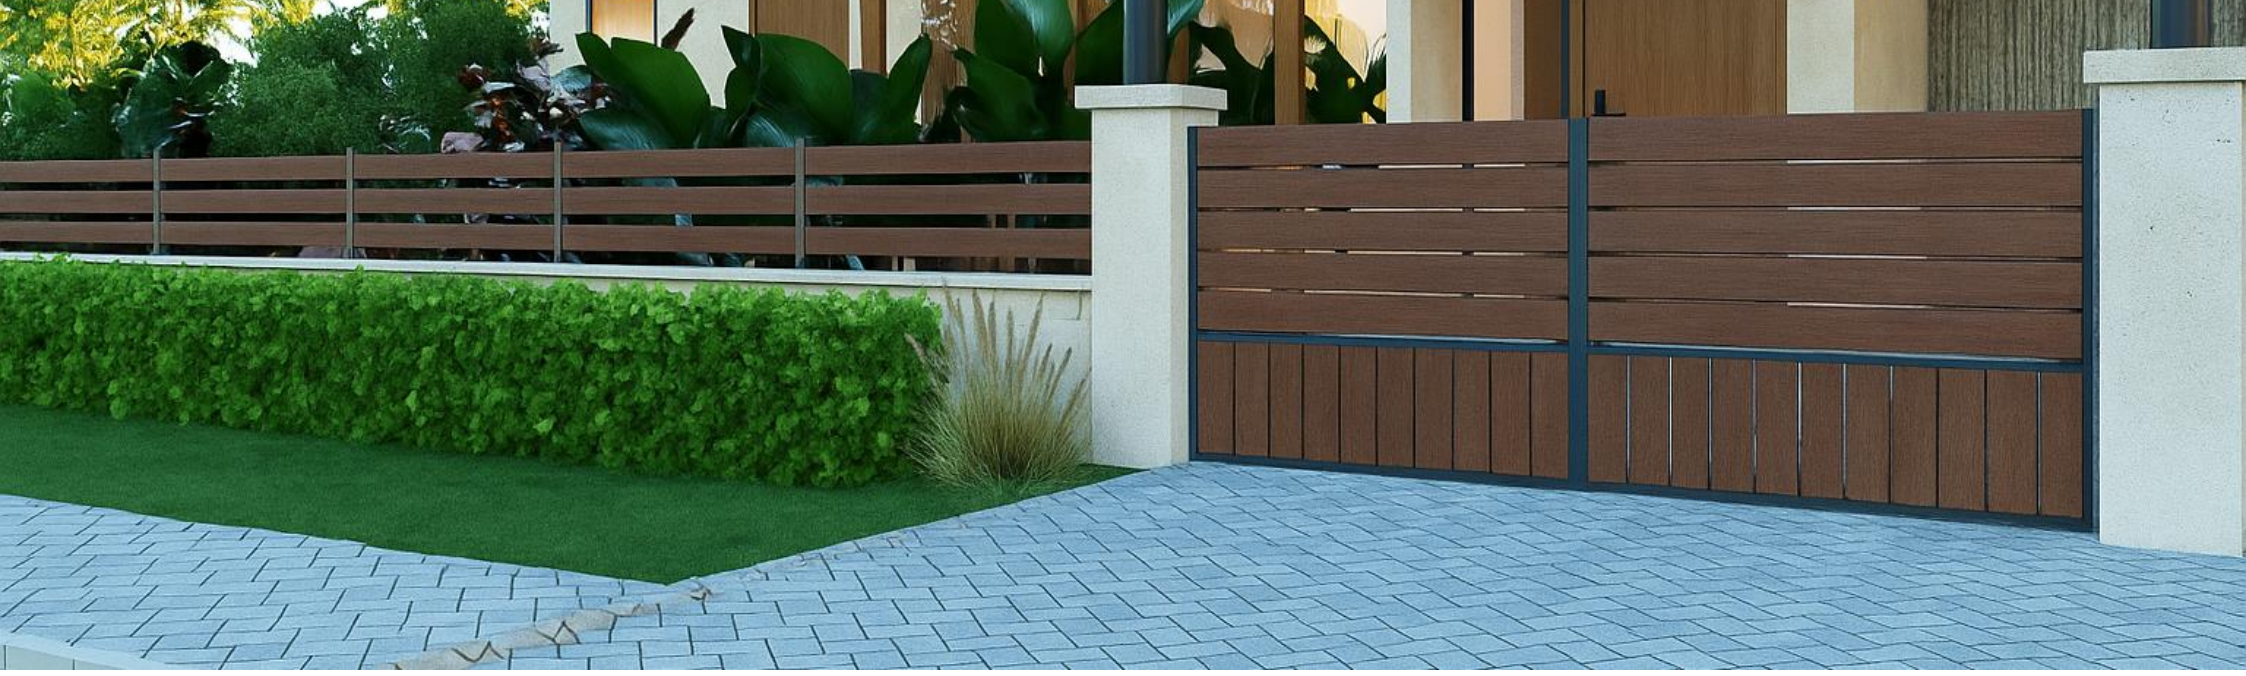

PWDS Extrusions Private Limited

📍 207/1B & 1C, Selakaraichal Road, Appanaickenpatti, Sullur, Coimbatore
641402, Tamil Nadu, India .

☎ 1800 833 4500



theuniceil.com



TÜVRheinland®
Precisely Right.