



8X8 MATRIX:

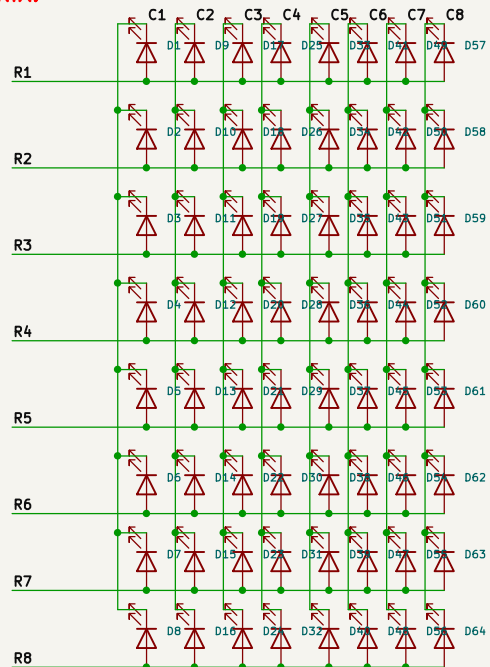


IS31FL3728 Driver IC:

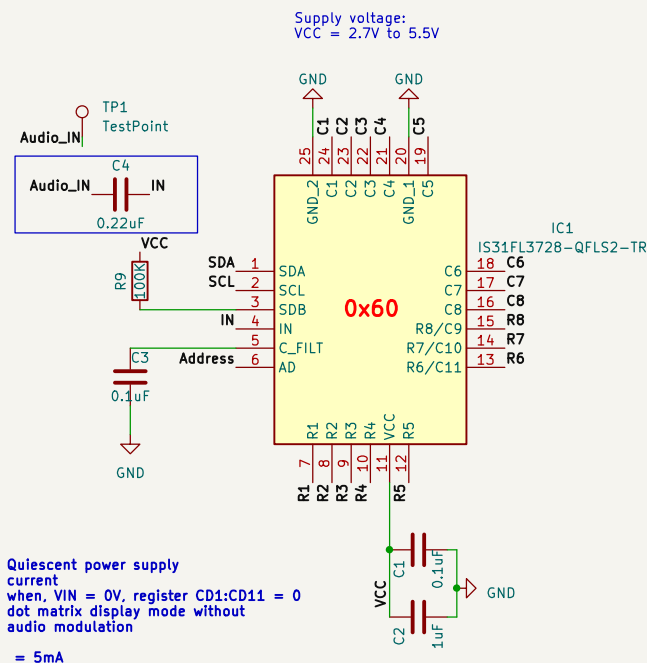


Output current of R1-R8
Dot matrix display mode without audio modulation
= 42.8mA
Current of Single LED in Rx(x=1-8) is IOUT/8.

Mikroe Connector

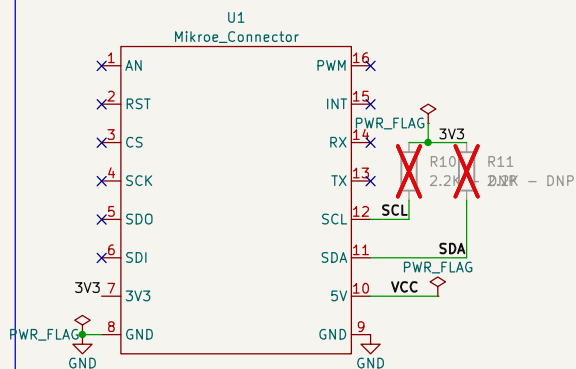

Address Selection:

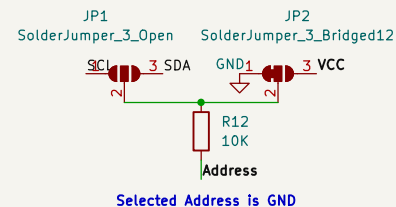

Sheet: /
File: BB2_Matrix_Breakout.kicad_sch

Title:

Size: A4

Date:

KiCad E.D.A. 8.0.3

Rev:

Id: 1/1