



Predistortion improvement vs distortion strength (sqc)


(a) Error scaling: uncorrected is linear in A , the mismatch residual is quadratic

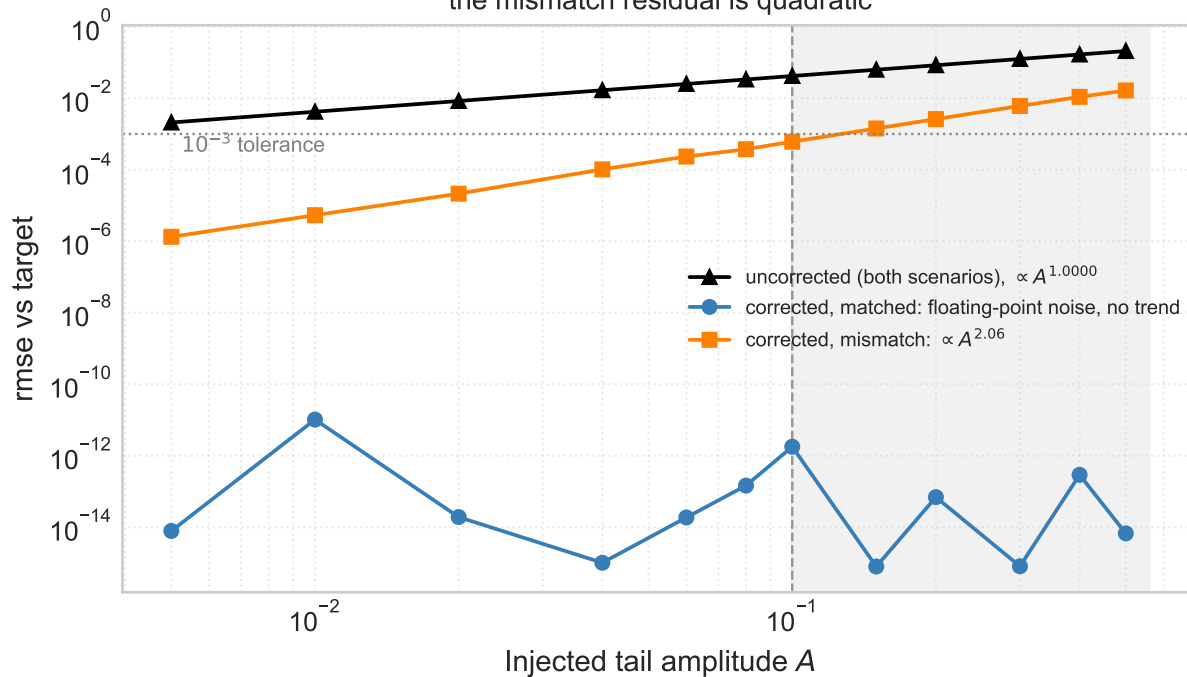

(b) Improvement DECREASES with strength ($\propto 1/A$). Matched is floating-point noise, not a trend

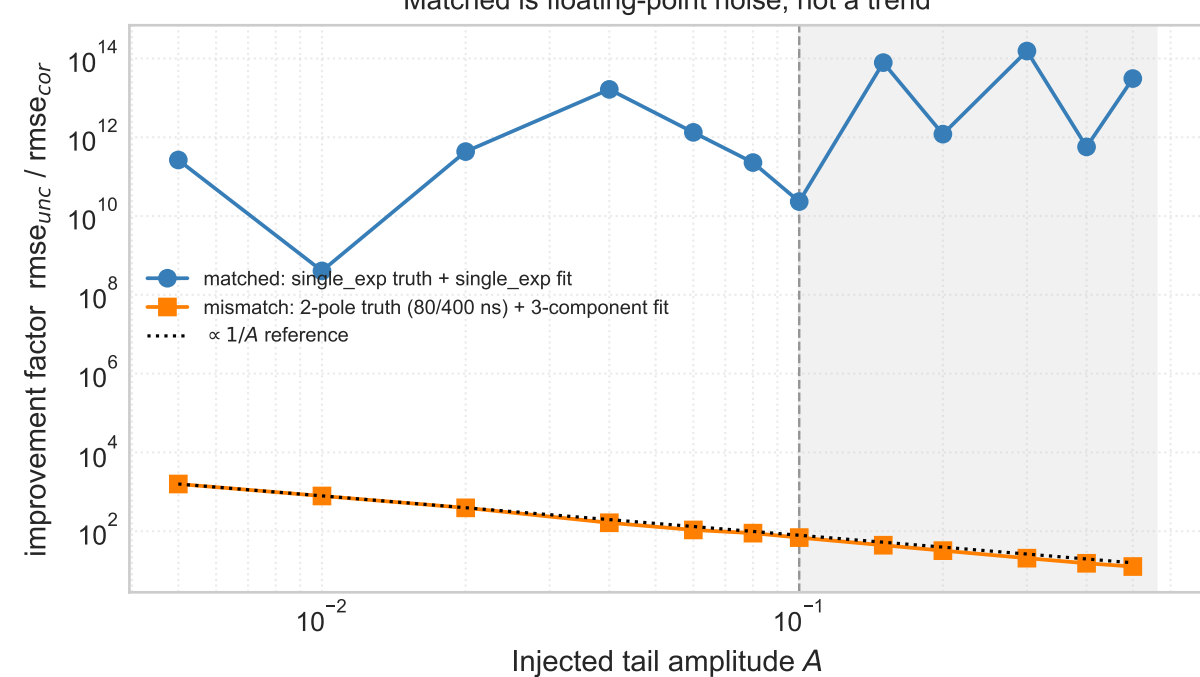

(c) Settling spec: correction holds to $A \approx 0.06$, then degrades toward the uncorrected line

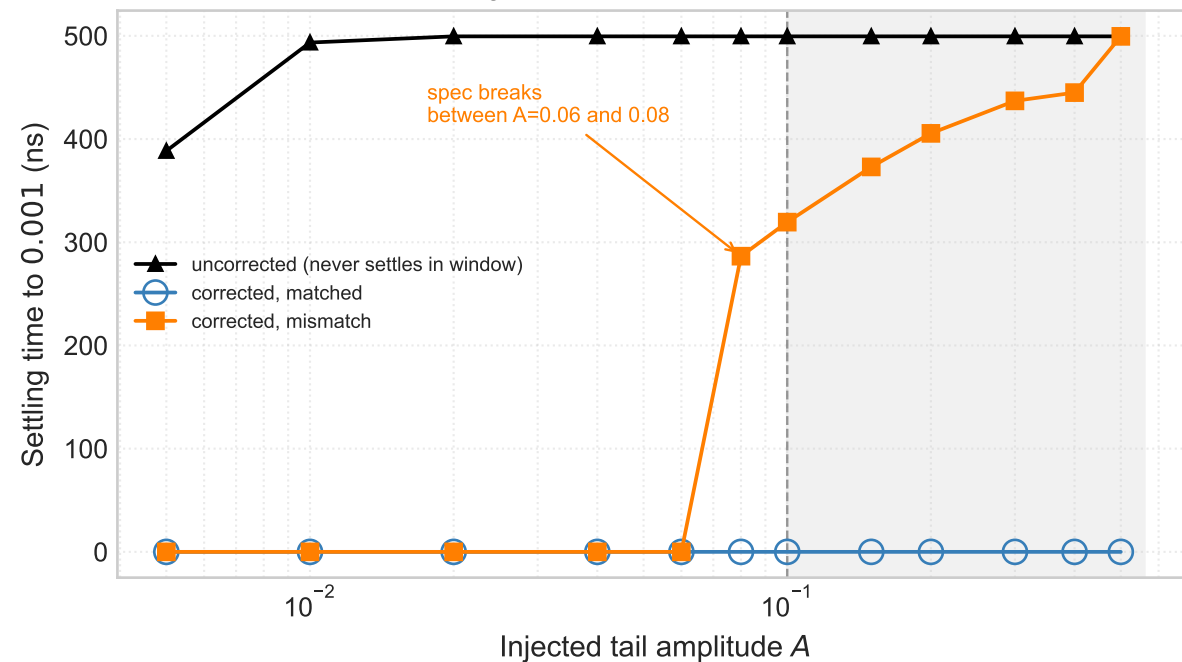

(d) Cost in AWG dynamic range: band height is the swing needed to place a unit-amplitude pulse on chip

