
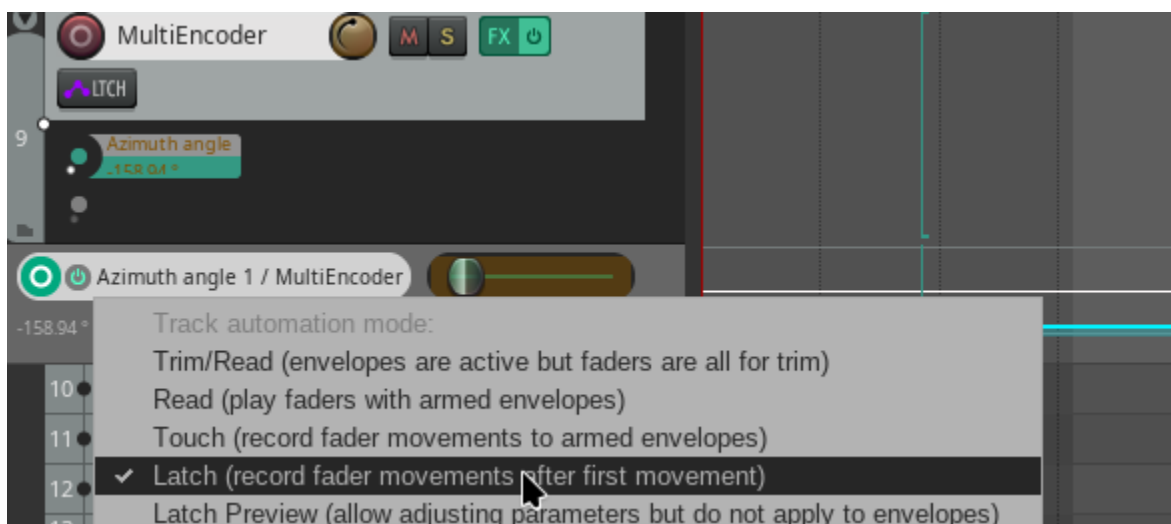



Audio UE04

Zoe Bunea - S2510238021
Martin Prommegger - S2510238024

Parameter Control via Mouse

In the Param menu of the Multiencoder we activated the azimuth parameter of the first object and latched it.

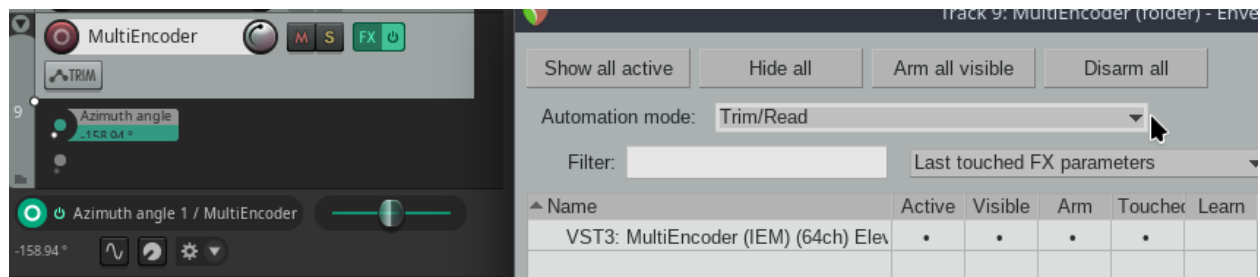


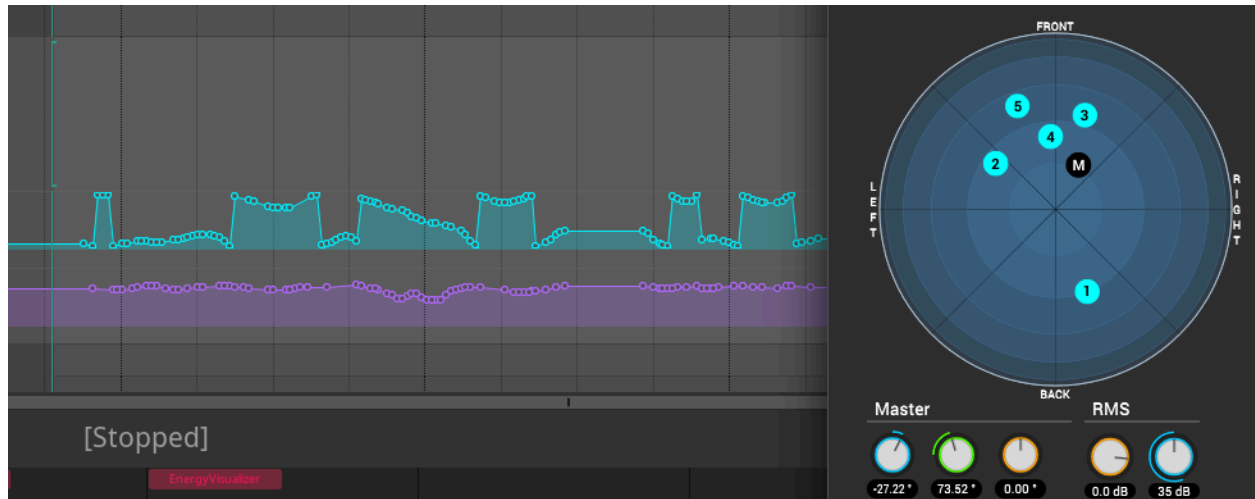

Recorded movements via mouse movements.


Parameter Control via LFO

We set up the LFO to generate a Saw L wave with the properties in the image seen below. To make it spin properly we added a point with 0° as a value to the envelope.

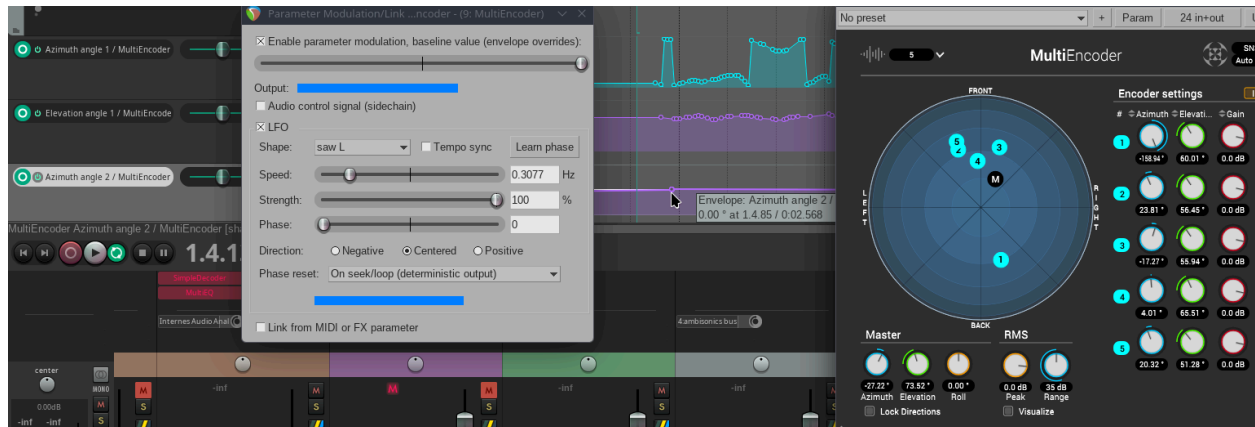


Parameter Control via MIDI Controller


We connected the MIDI keyboard and set Midi-Bridge: MPK225 MIDI, Port A, Port B and Remote to as Input, All and Control (Screenshot doesn't show Port A, Port B and Remote, but it was required to get inputs from the spinning sliders).

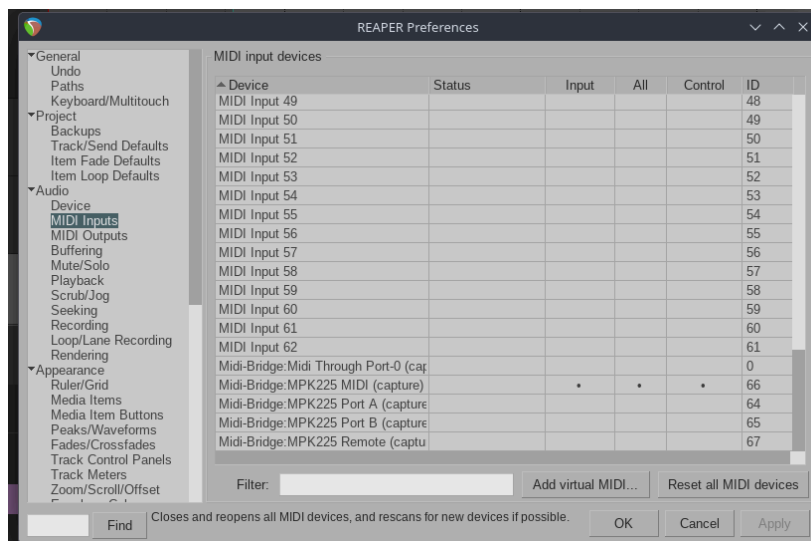

Using the learn option under *Param*, we bound one of the sliders from the midi keyboard to control the azimuth.

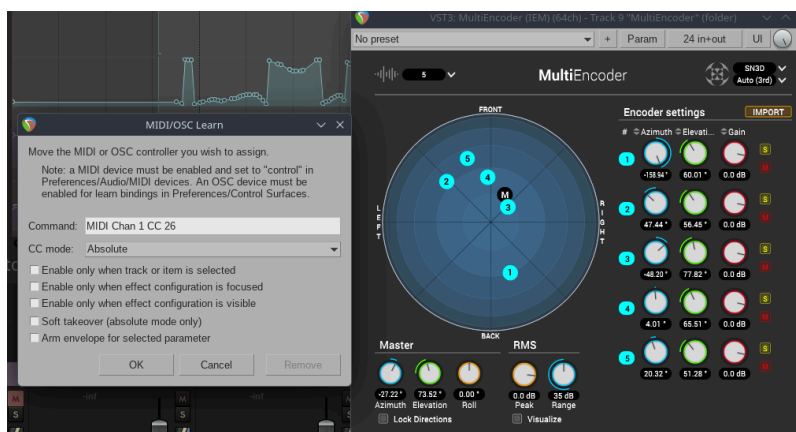


We latched it and recorded a simple automation.

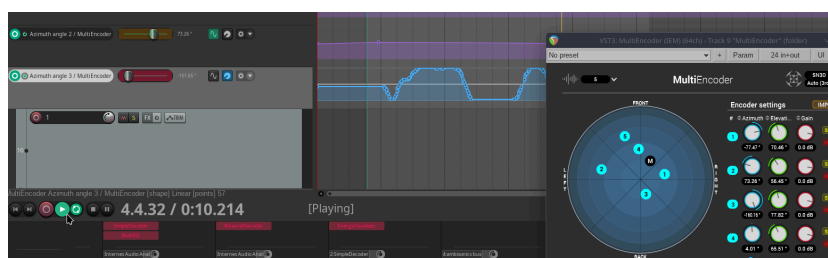

Parameter Control via OSC

For controlling via OSC we installed *TouchOSC*. In the MultiEncoder we set up the OSC settings (see image below) and opened the ports so we could receive data from TouchOSC.

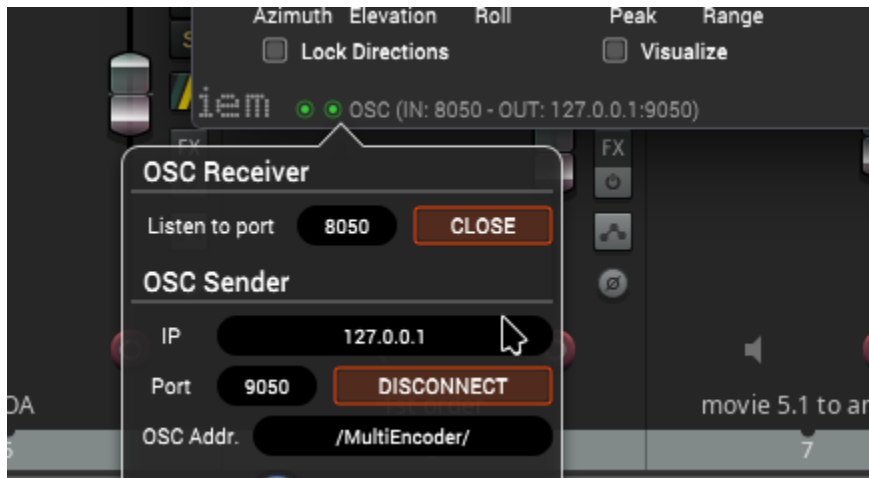

In TouchOSC we added a Radar input with two new messages to send x and y coordinated to the fourth object:

- /MultiEncoder/elevation3
 - x
 - Scale: 90 | 0
- /MultiEncoder/azimuth3
 - y
 - Scale: -180 | 180

We also flipped the Radar vertically so it matches the view in the MultiEncoder.

