INTRODUCTION TO AUDIODESIGN VL04

MODE SELECTOR
REPEAT
1
2
3
4
5
6
SINGLE
SPACE ECHO
RE-150
REPEAT RATE
INTENSITY
ECHO VOLUME
POWER
ON
OFF
ECHO/NORMAL
FOOT SW
ECHO CANCEL
OUTPUT
DIRECT
ECHO
-15 -25 -35 dB
WIEDERHOLUNG

INTERVIEW REC

PSU VS BATTERY

SINGLE VS. DUAL SYSTEM SOUND

AUDIO RECORDER

SONY XDCAM EX3

SONY FS700 + ODYSSEY 7Q

Blackmagicdesign
RECORD
MONITOR
AUDIO
SETUP
PRESETS
LUTS
CHANNEL 1 SOURCE
Camera Right
CHANNEL 2 SOURCE
XLR - Mic
CHANNEL 1 LEVEL
-36 -30 -24 -18 -12 -6 0
CHANNEL 2 LEVEL
-36 -30 -24 -18 -12 -6 0
CHANNEL 1 GAIN
50%
CHANNEL 2 GAIN
50%
BMD POCKET

MICROPHONES

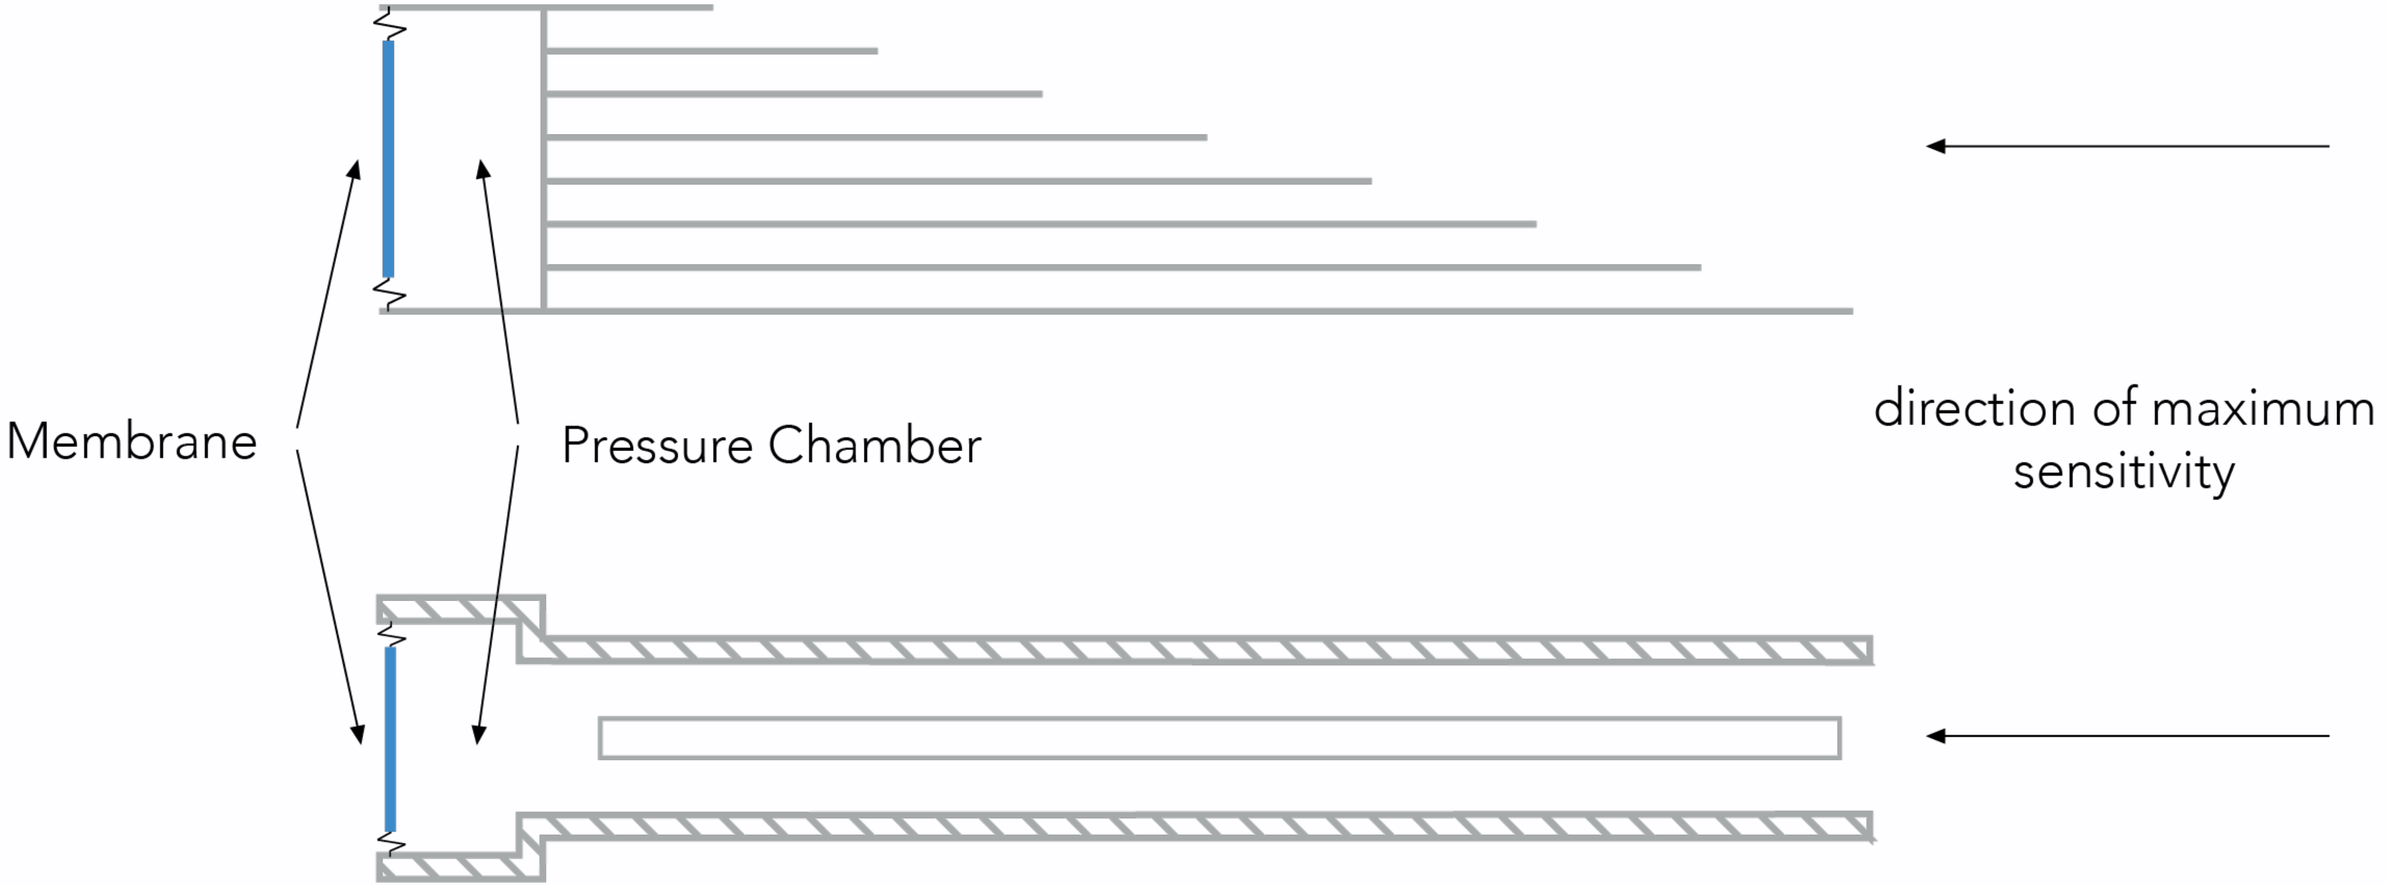

INTERFERENCE TUBE

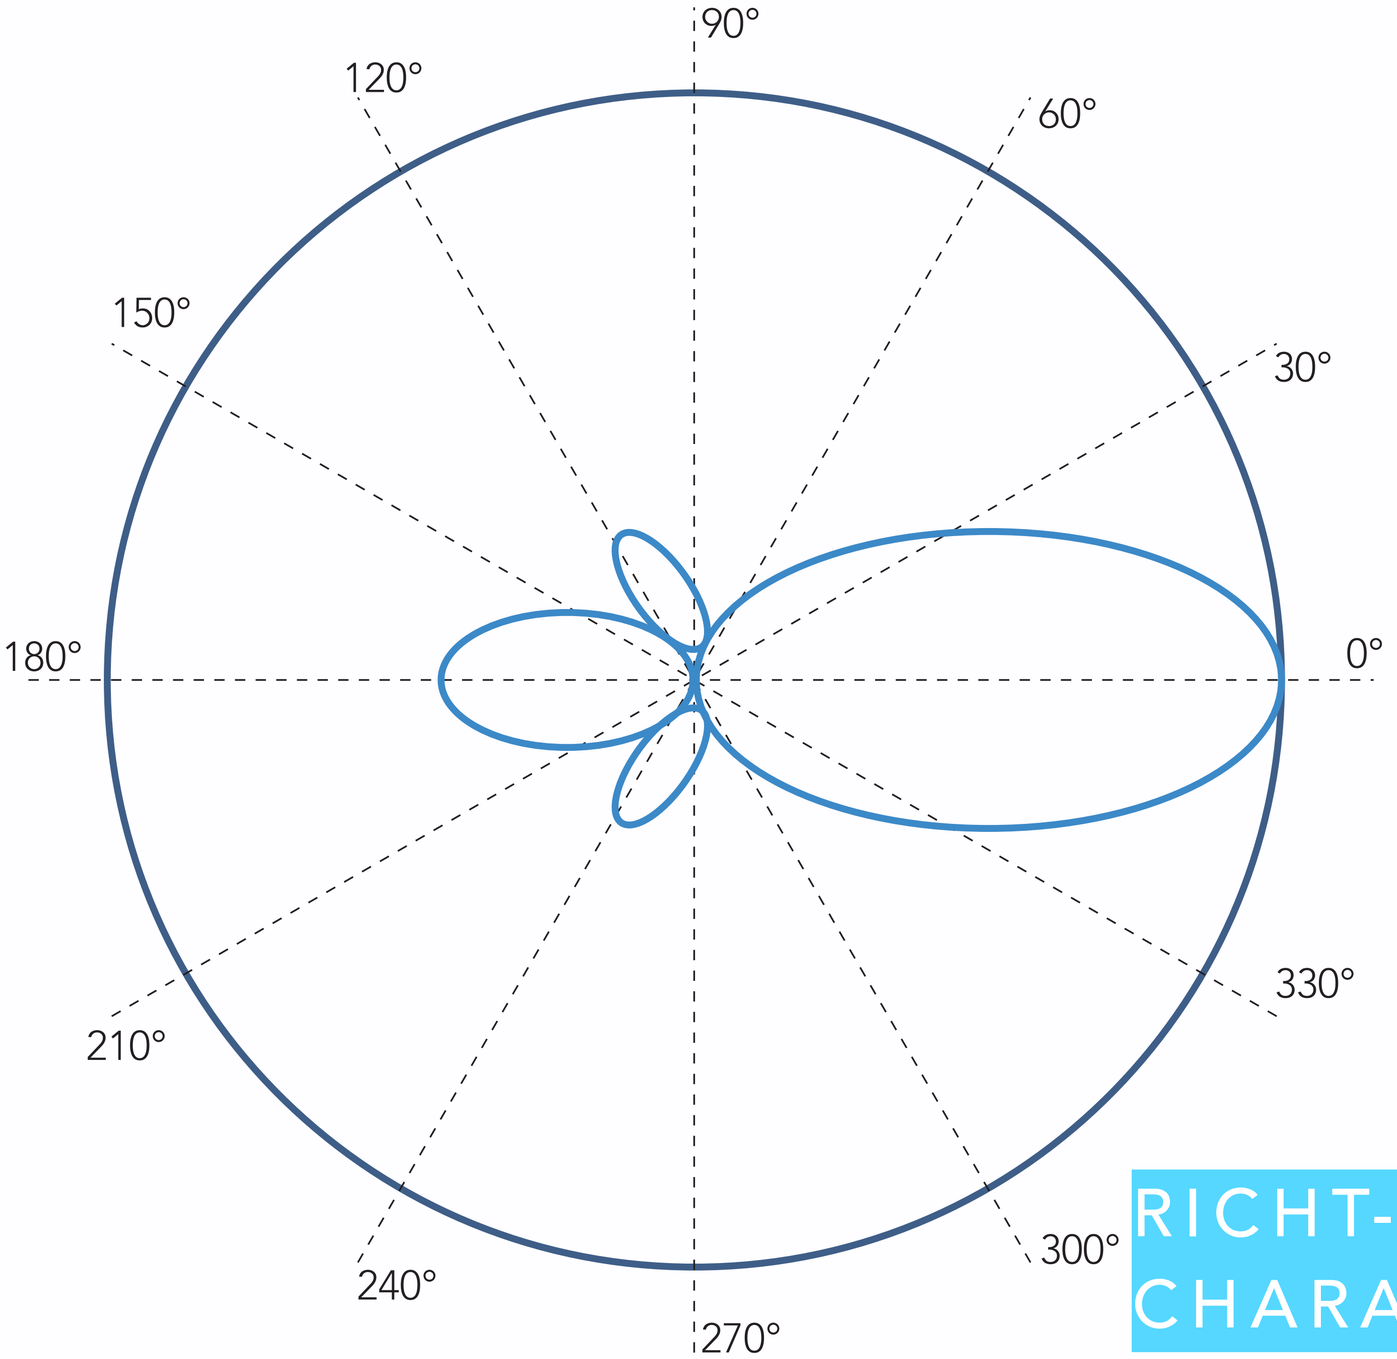

RICHT-CHARAKTERISTIK

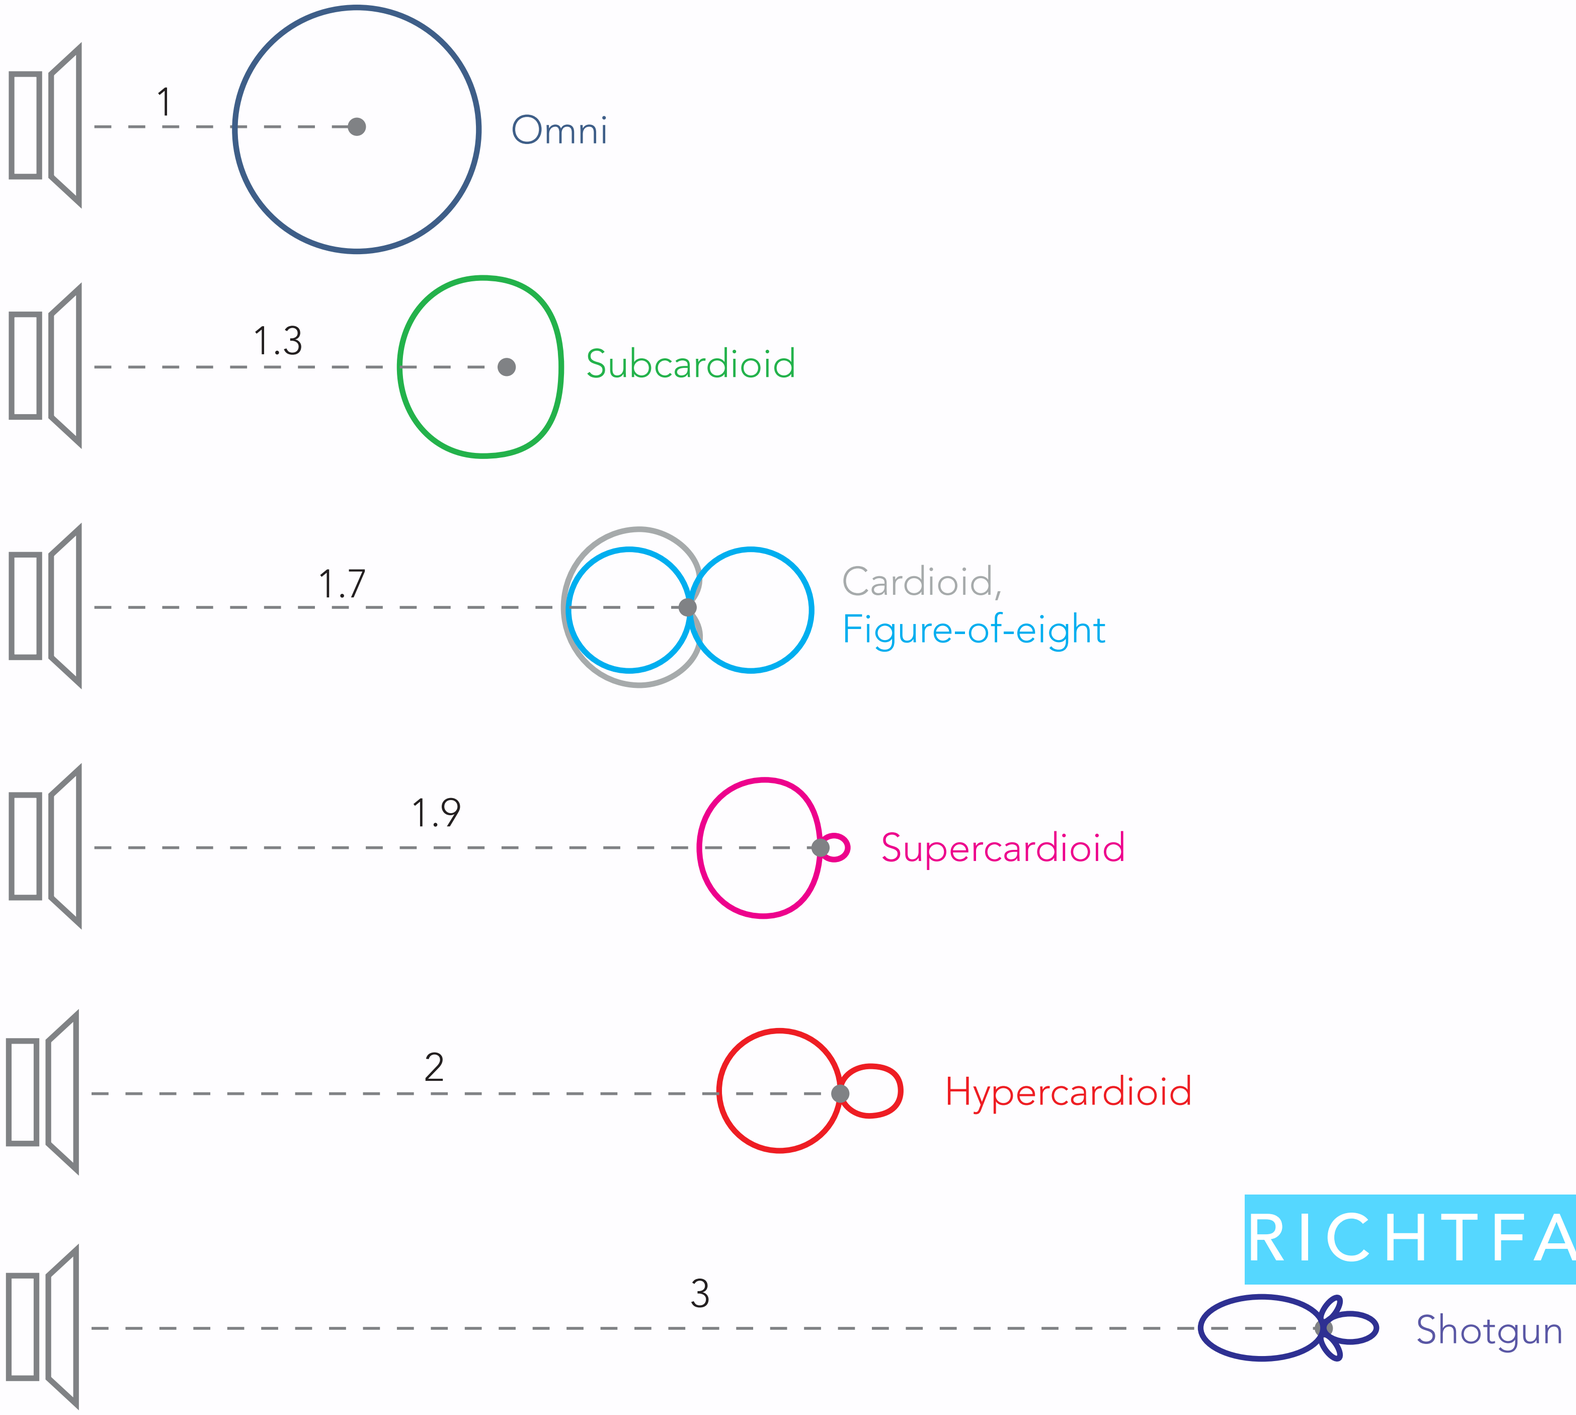
1
Omni
1.3
Subcardioid
1.7
Cardioid,
Figure-of-eight
1.9
Supercardioid
2
Hypercardioid
RICHTFAKTOR
3
Shotgun

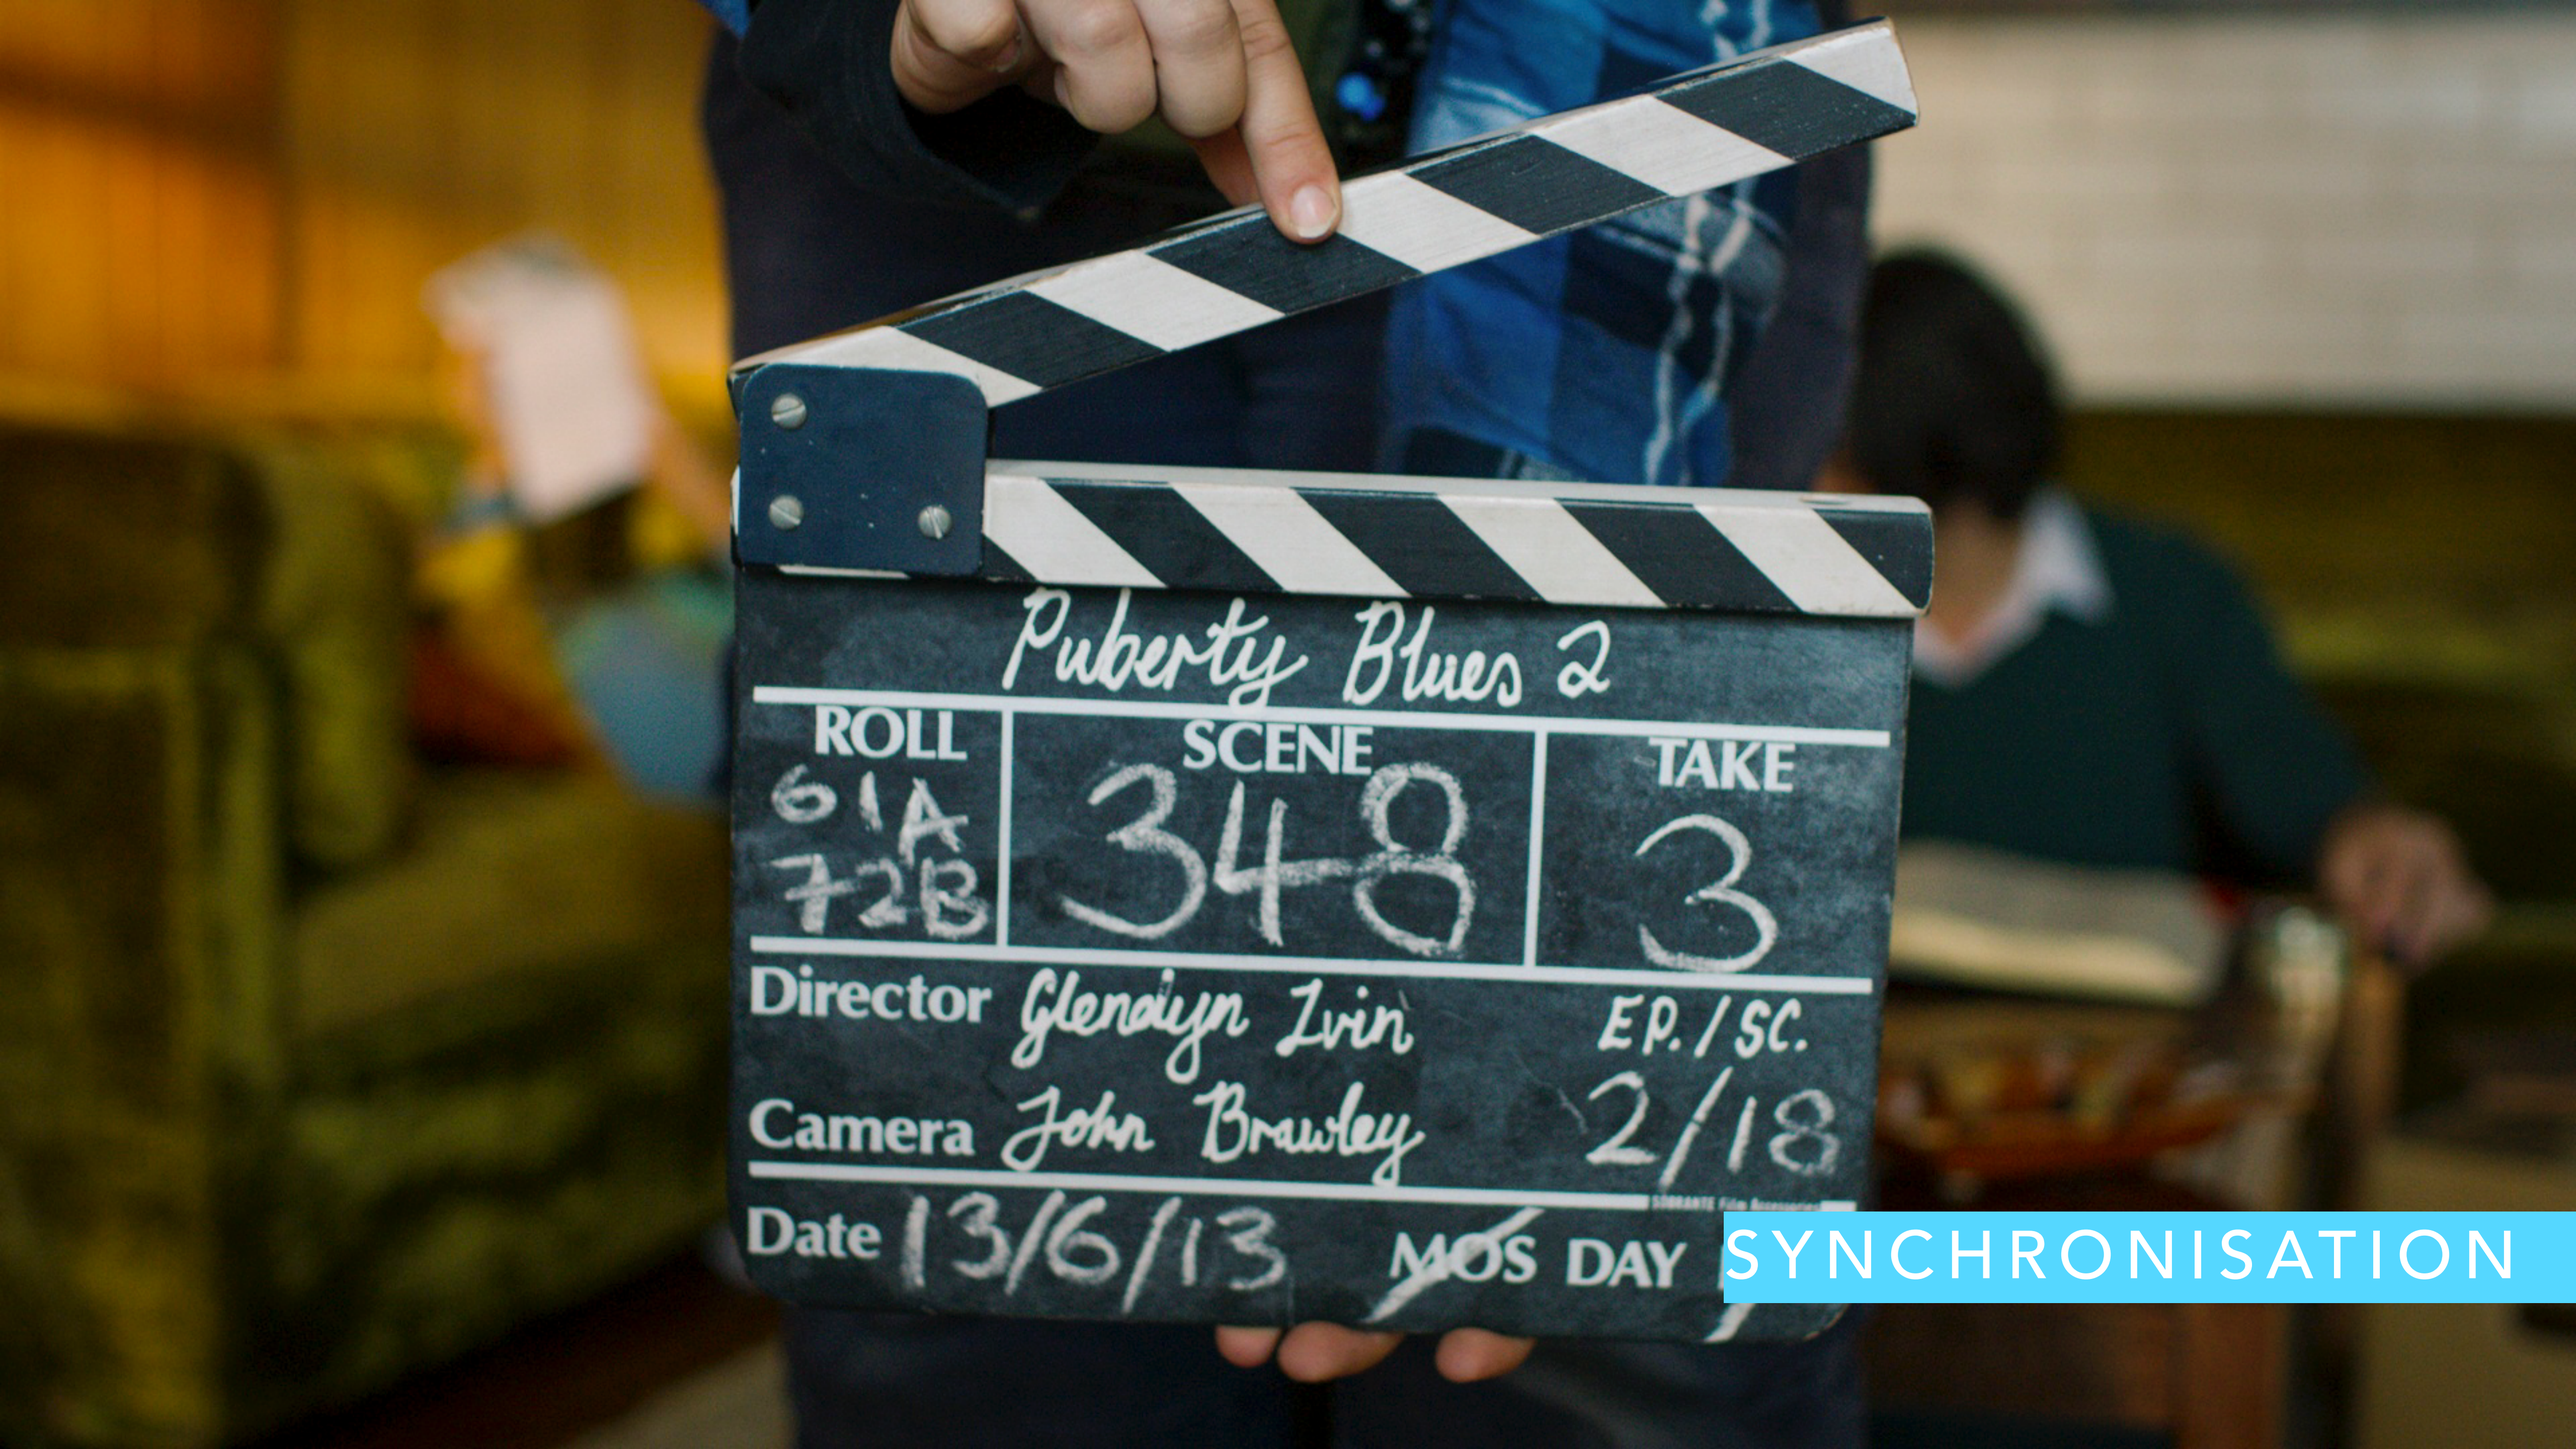

SYNCHRONISATION

TIMECODE SYNC

MIKRO POSITION

MIKRO POSITION