


INTRODUCTION TO AUDIODESIGN VL03



MODE SELECTOR
REPEAT
1
2
3
4
5
6
SINGLE
SPACE ECHO
RE-150
REPEAT RATE
INTENSITY
ECHO VOLUME
POWER
ON
OFF
ECHO/NORMAL
FOOT SW
ECHO CANCEL
OUTPUT
DIRECT
ECHO
-15 -25 -35 dB
WIEDERHOLUNG

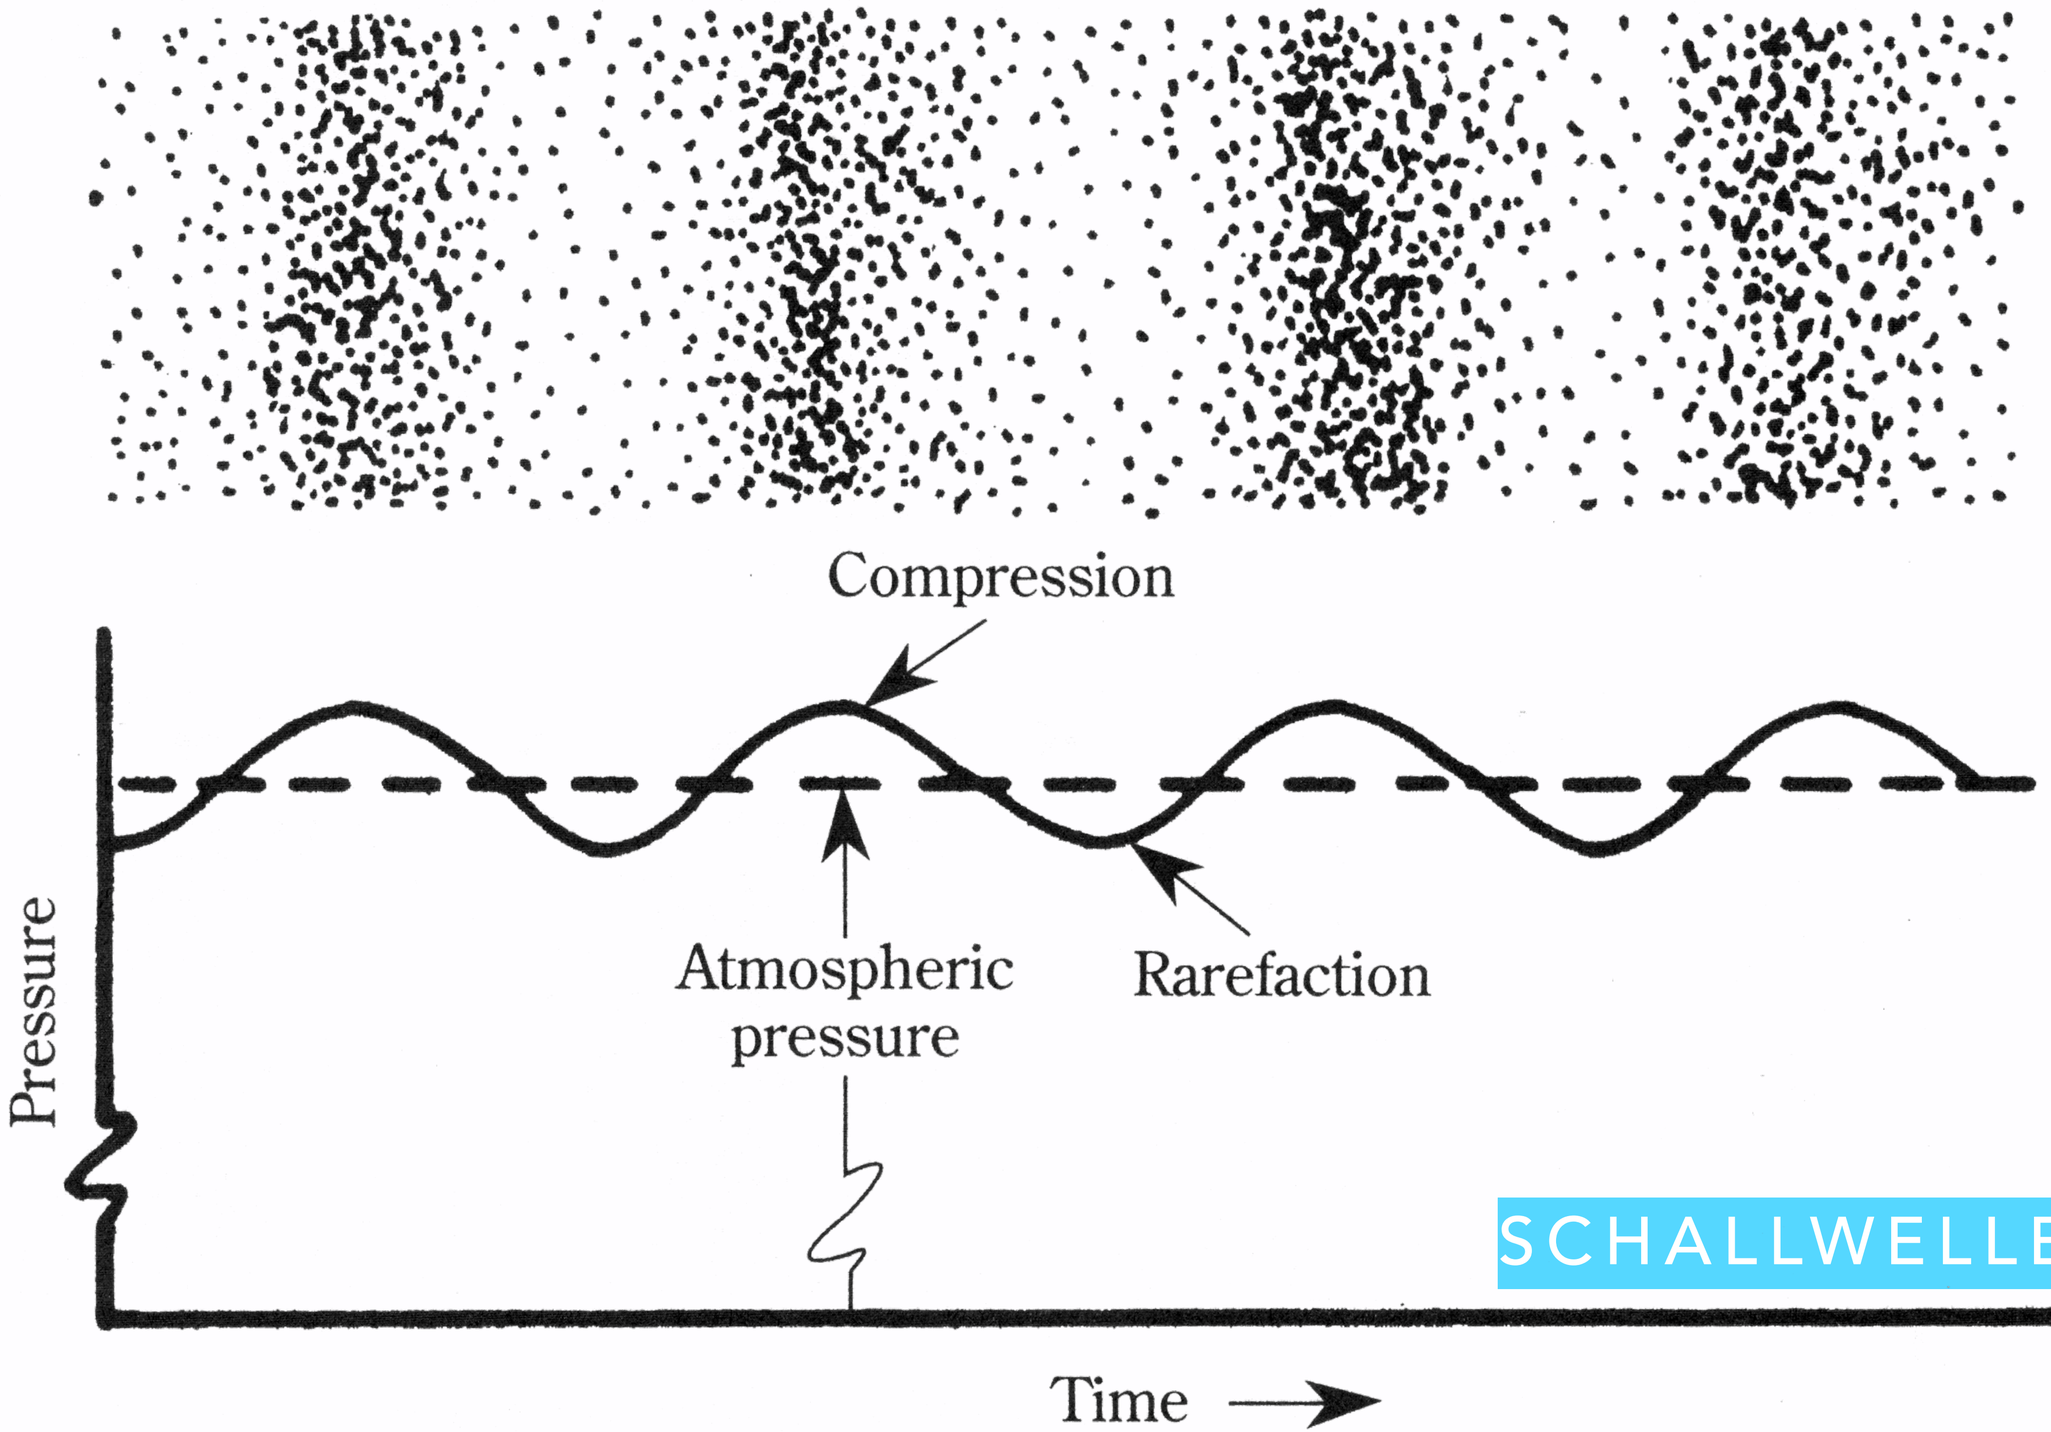

SCHALLWELLE

MEDIUM (20°C)	SCHALLGESCHWINDIGKEIT (m/s)
GUMMI	40
LUFT	343
LUFT (0°C)	331
WASSER	1484
BLEI	2100
BUCHENHOLZ	3300
ALUMINIUM	6300

GESCHWINDIGKEIT

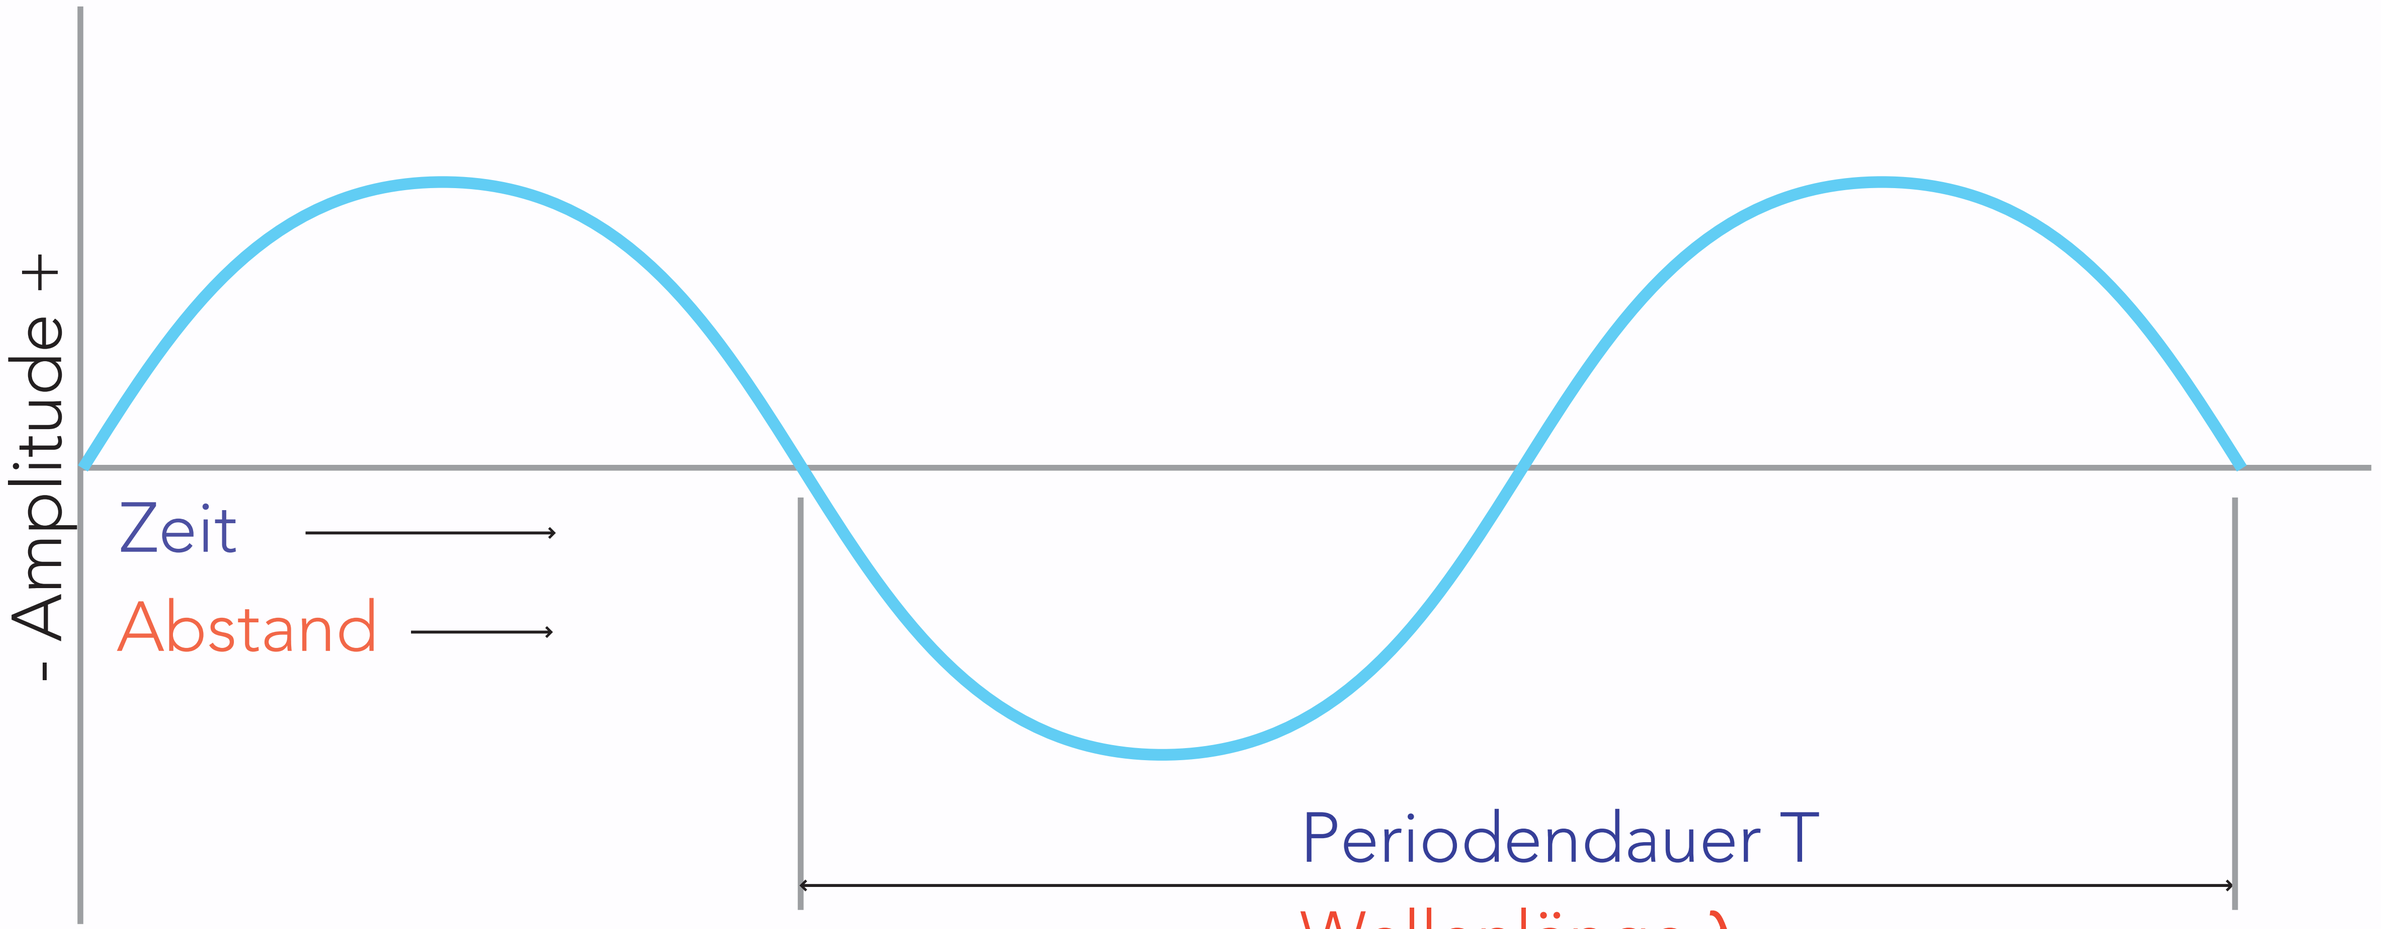


T, f, λ GRÖSSEN

$$f = \frac{1}{T} \qquad \lambda = \frac{c}{f}$$


T, f, λ BERECHNUNG

FREQUENZ f[Hz]	WELLENLÄNGE λ	PERIODENDAUER T[ms]
20	17m	50
100	3.4m	10
1k	34cm	1
10k	3.4cm	0.1
20k	1.7cm	0.05

f / λ / τ VERGLEICH

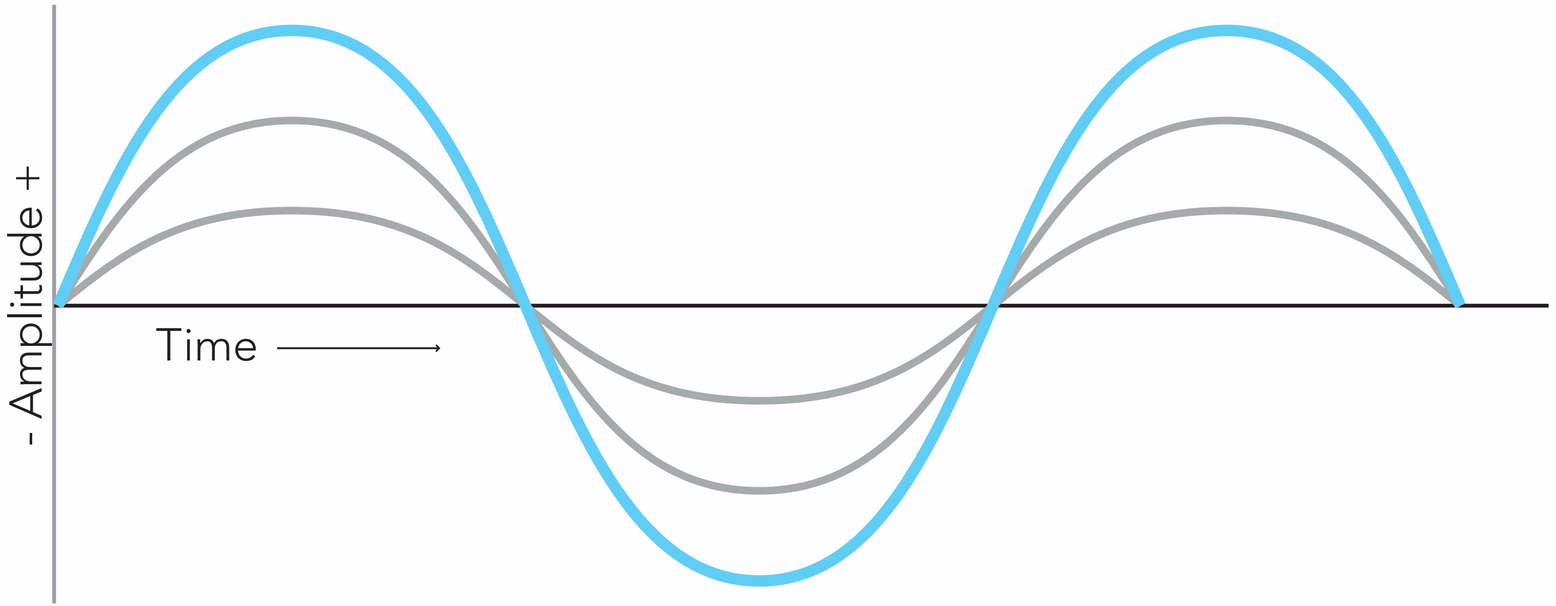



KONSTRUKTIV

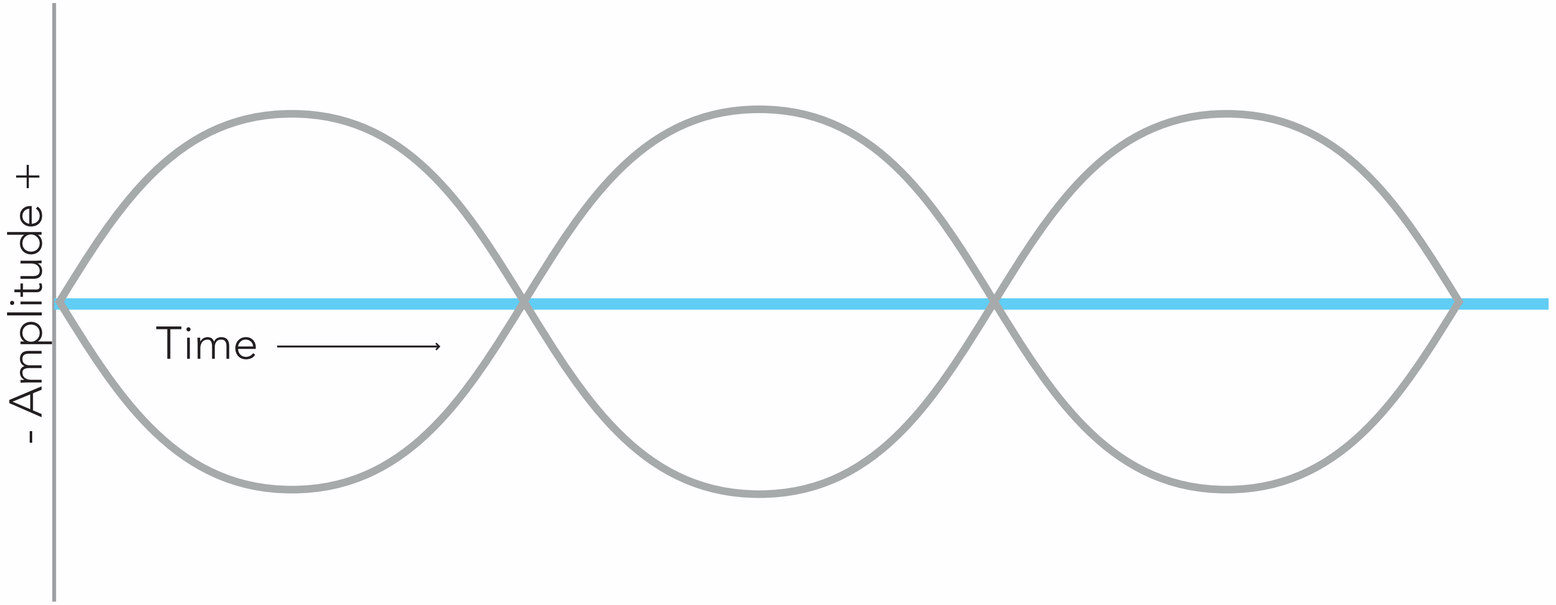

DESTRUKTIV

INTERFERENZ

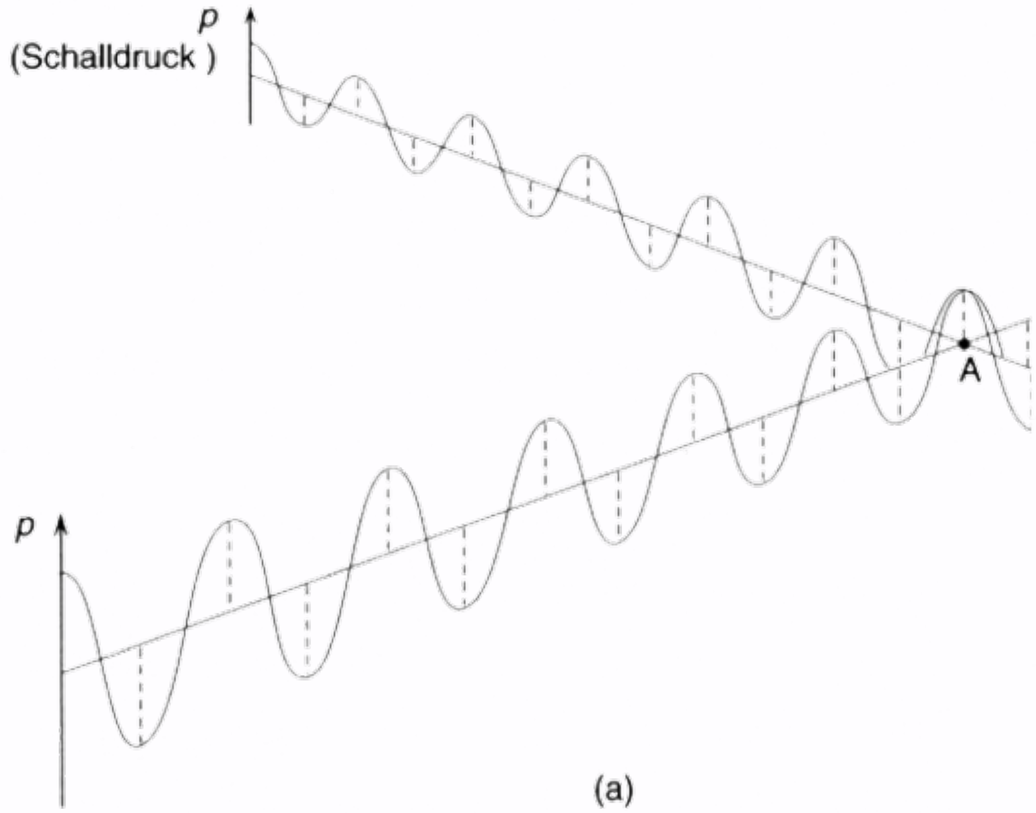


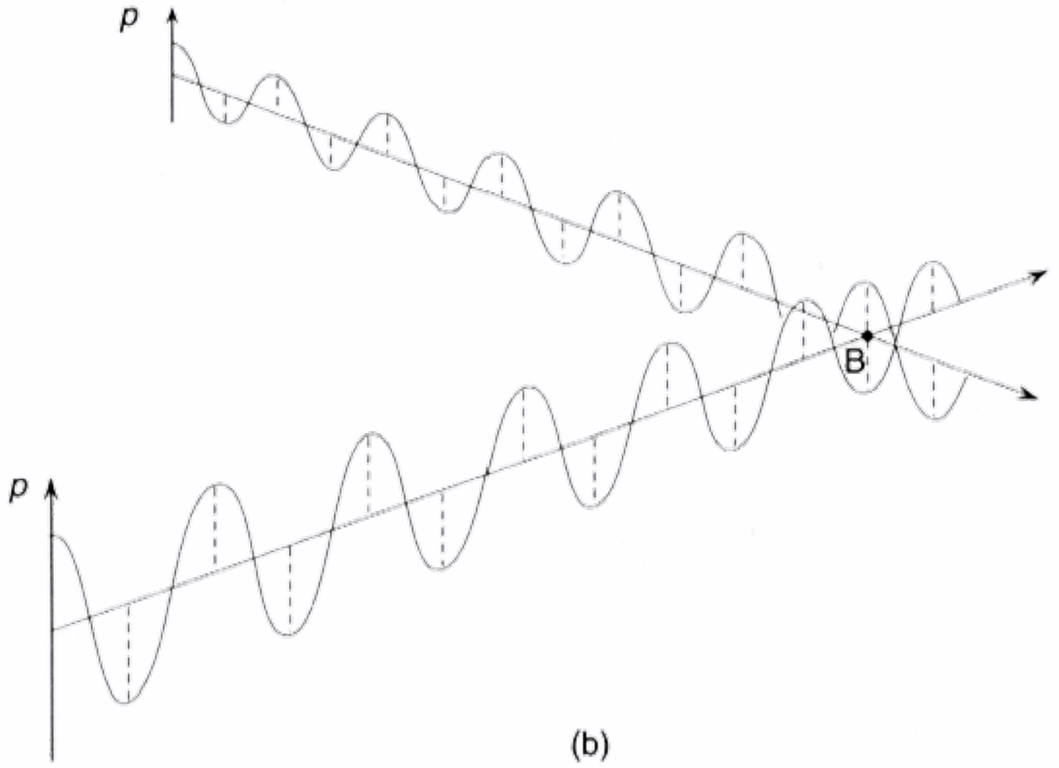


INTERFERENZ


TASCAM
REW
IN USE ONLY
TC/PILOT
PHONES
LEVEL
BATT.
MIKES
LINE
NRS
NORMAL
SMPTE - EBU TIME CODE
SHIFT
EXECUTE
CALL TC
EXT TC
CALL UB
INT TC
ENTER
SEARCH TC
RESET TC
CLEAR
SET FROM EXT
RECORD
TEST
NO LIMITER
TAPE
DIRECT
STOP
PLAYBACK
LINE & PHONES
METER
POWER

AUDIO DEMO

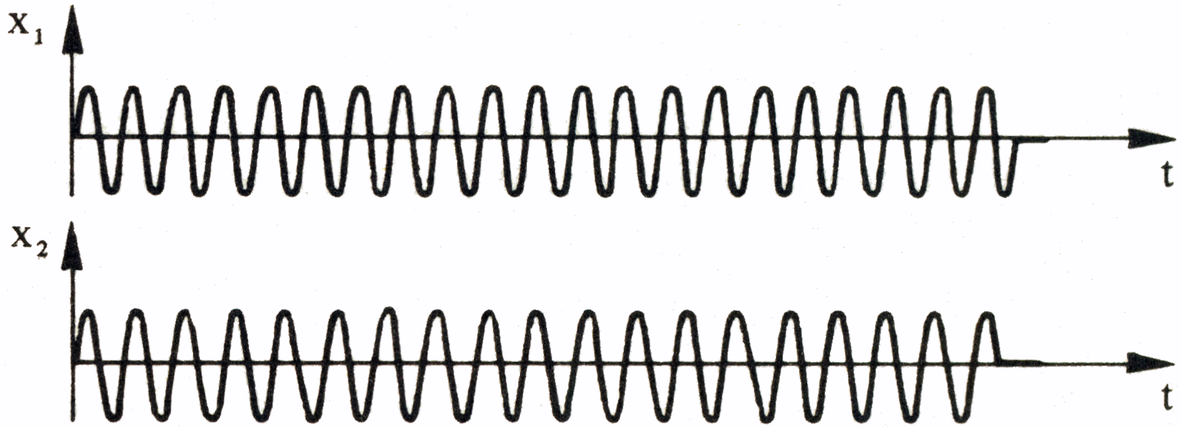


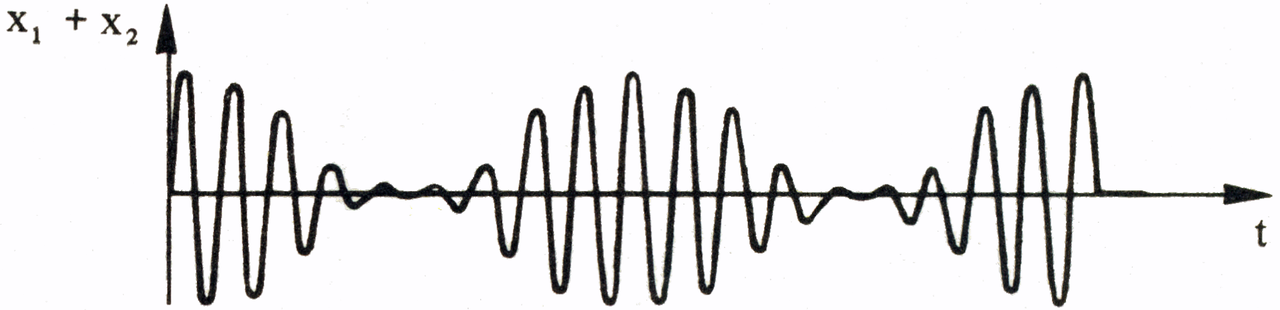


SCHWEBUNG


TASCAM
REW
IN USE ONLY
TC/PILOT
PHONES
LEVEL
BATT.
MIKES
LINE
NRS
NORMAL
SMPTE - EBU TIME CODE
SHIFT
EXECUTE
CALL TC
EXT TC
CALL UB
INT TC
ENTER
SEARCH TC
RESET TC
CLEAR
SET FROM EXT
RECORD
TEST
NO LIMITER
TAPE
DIRECT
STOP
PLAYBACK
LINE & PHONES
METER
POWER

AUDIO DEMO

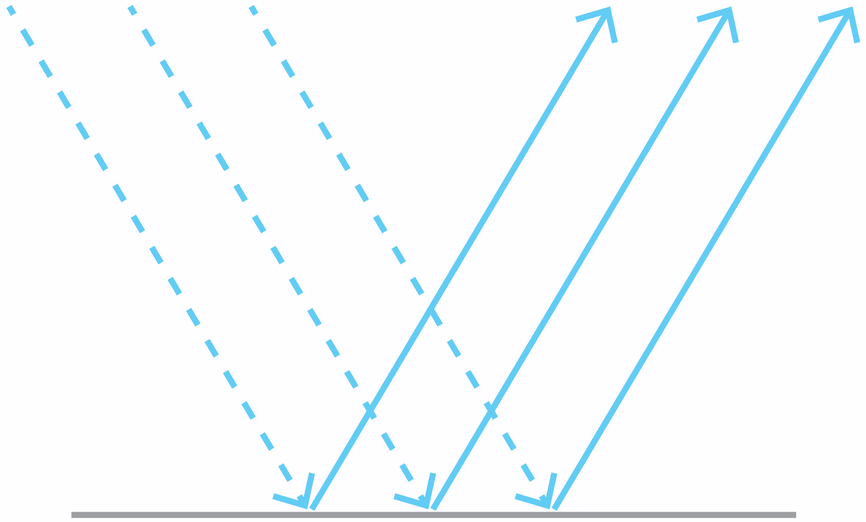


regelmäßig

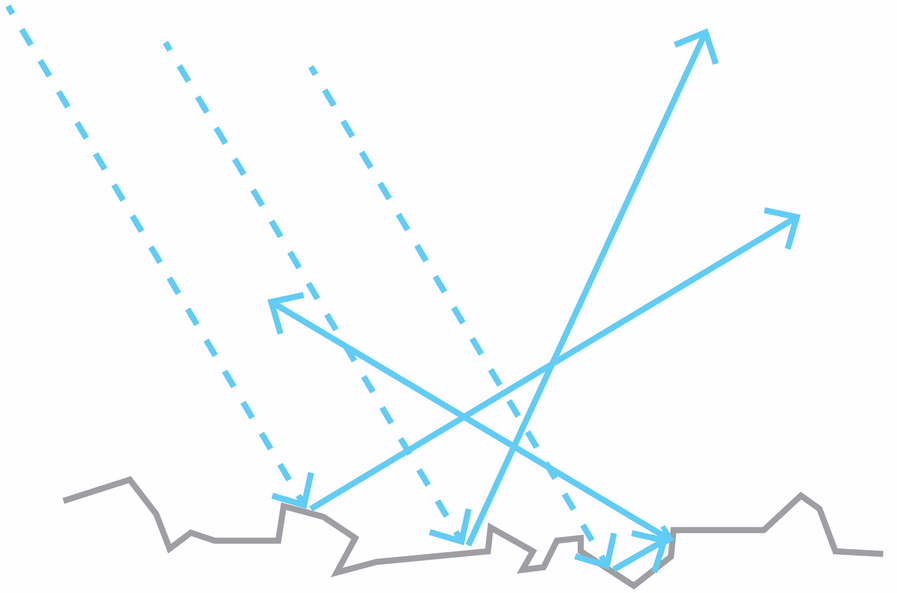


diffus


REFLEXION

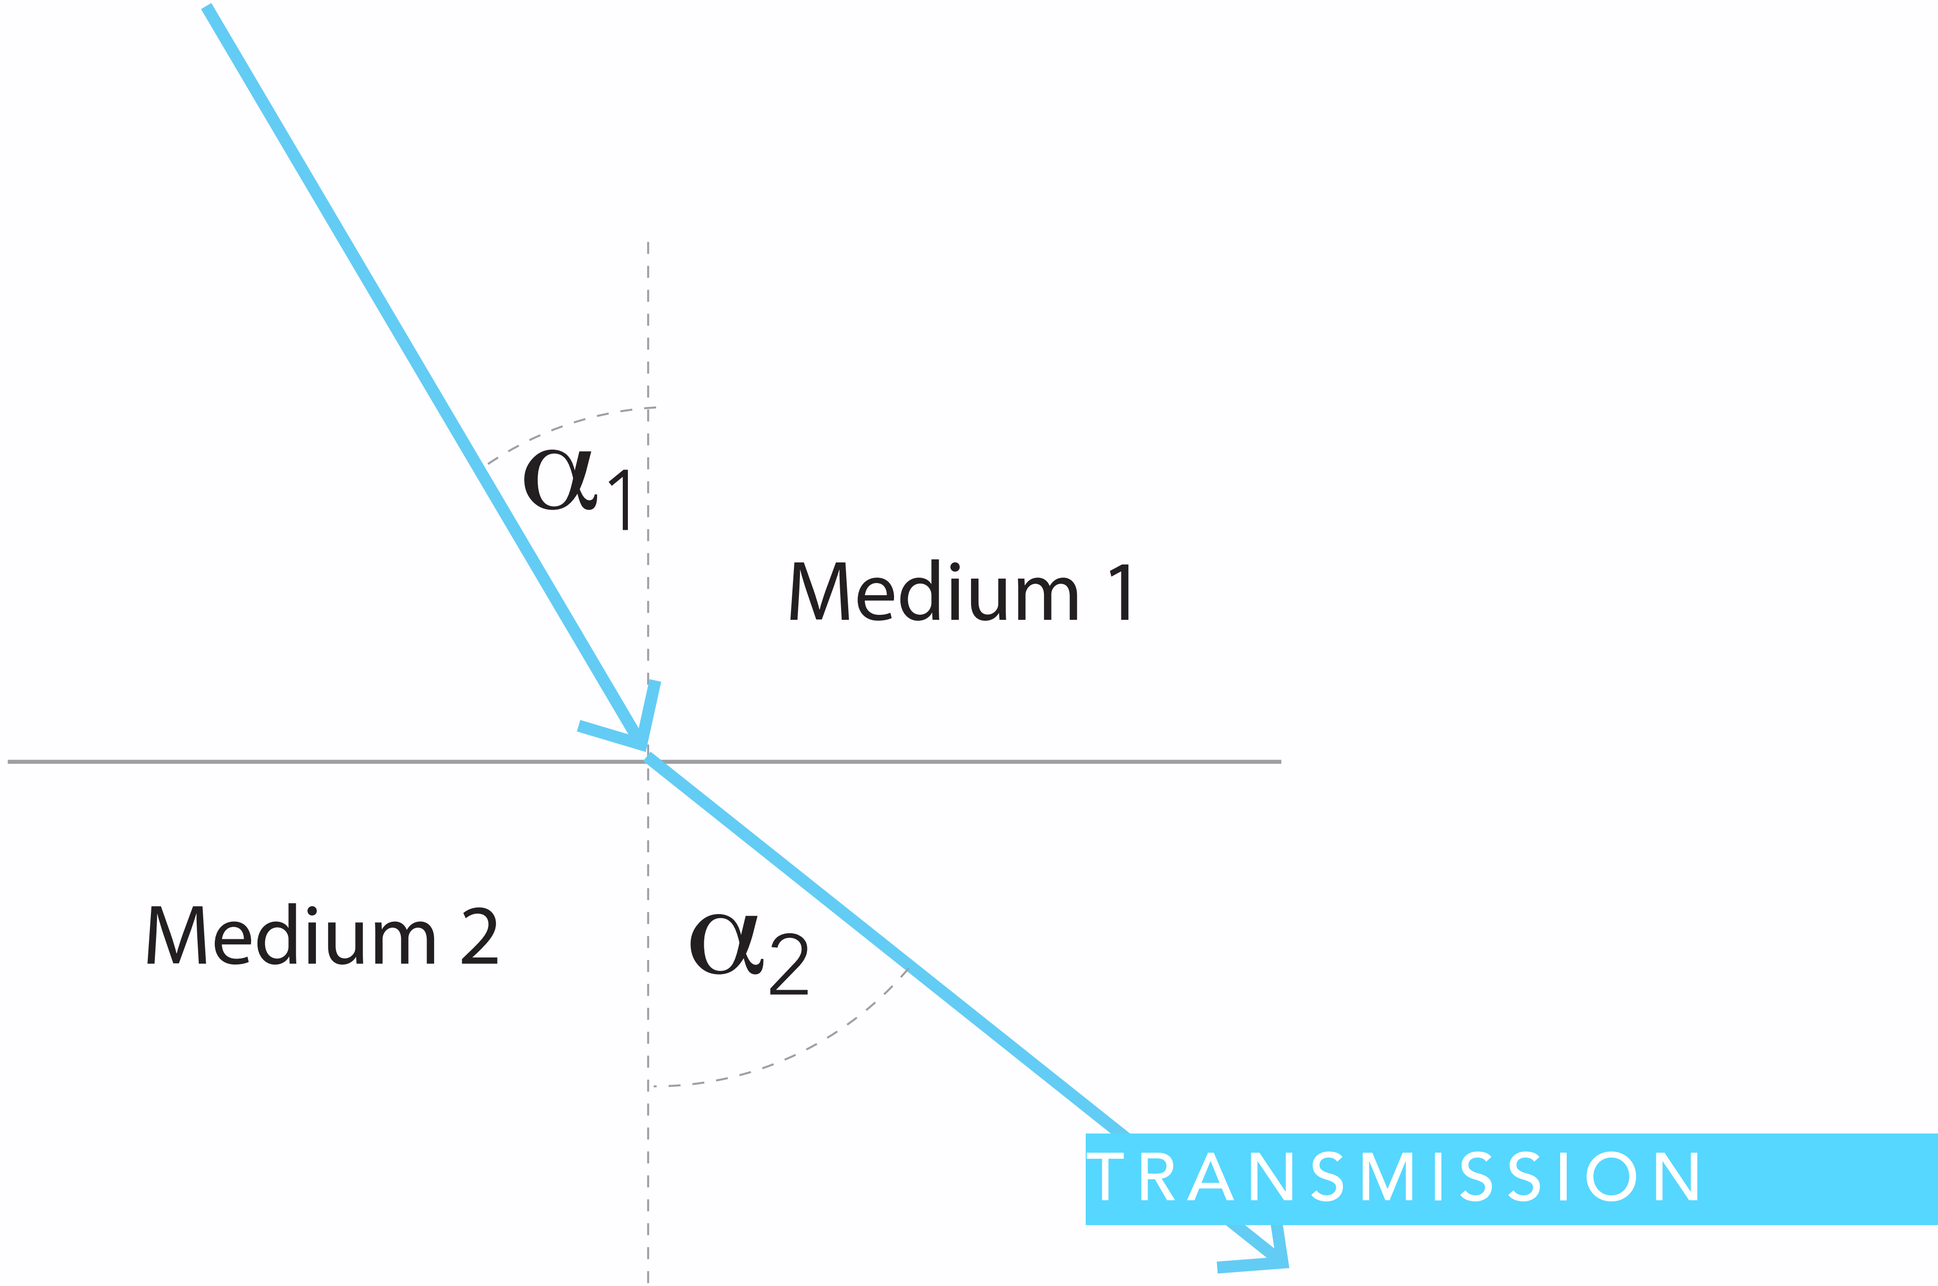
α_1
Medium 1
Medium 2
α_2
TRANSMISSION

GLEICHMÄßIG

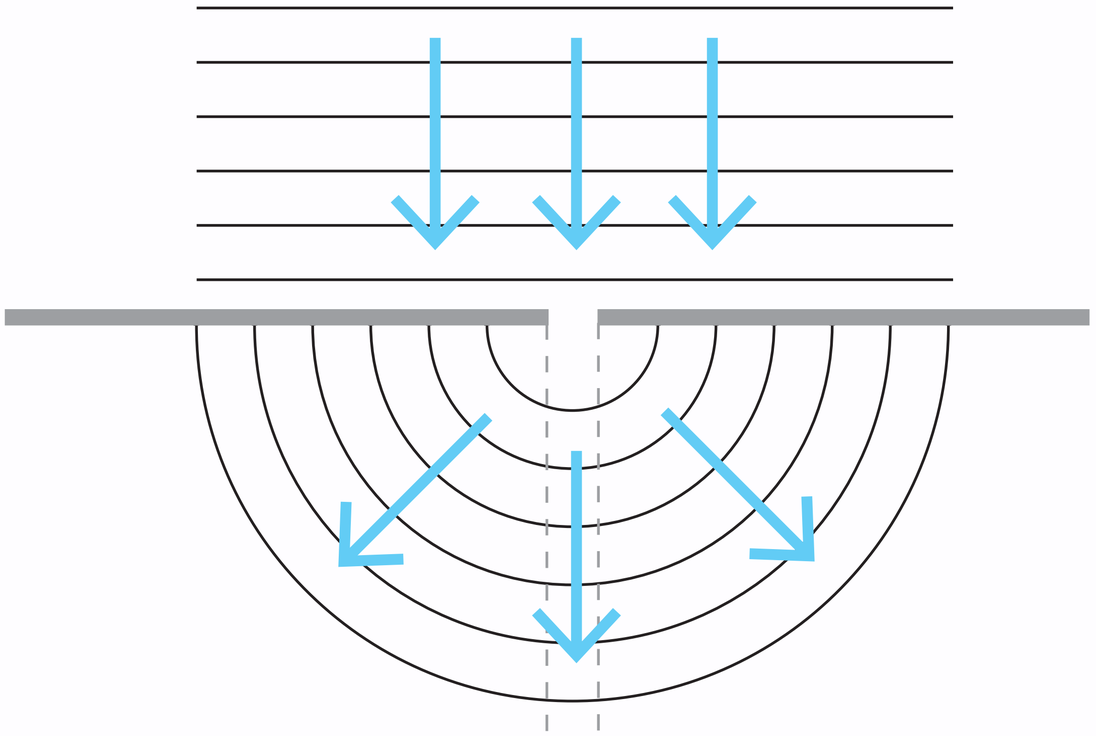


GERICHTET

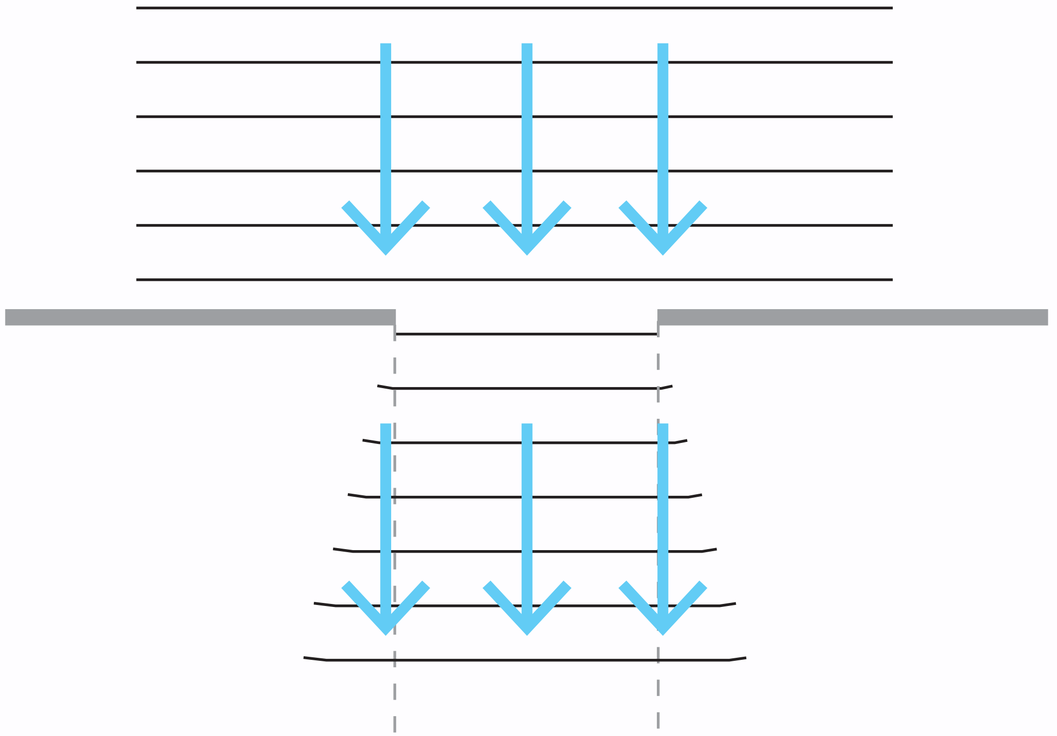


DIFFRAKTION


REFLEKTION

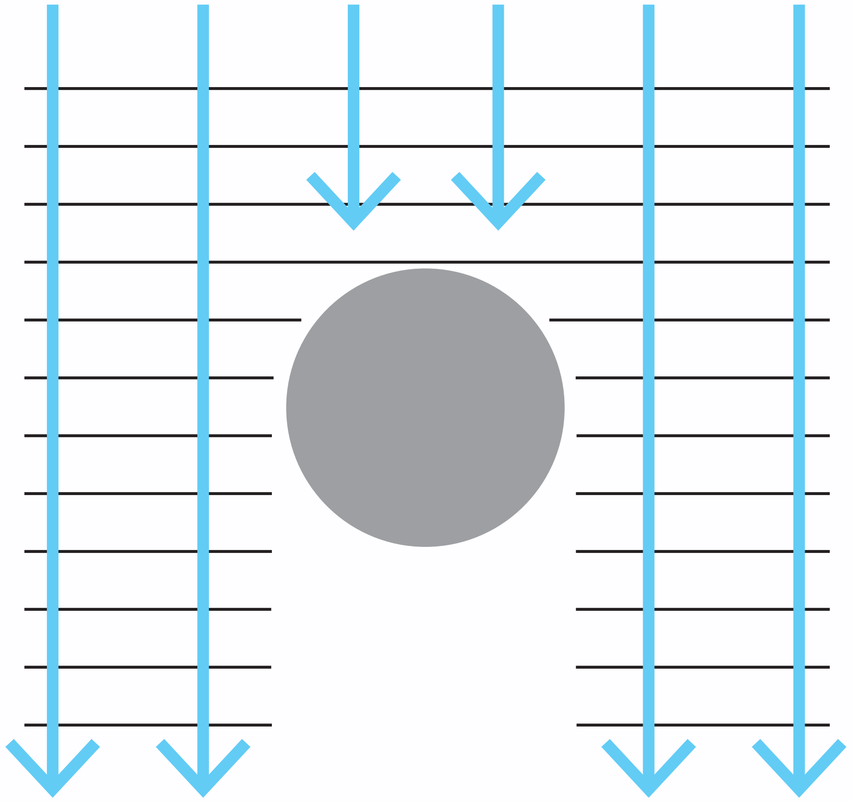


BEUGUNG

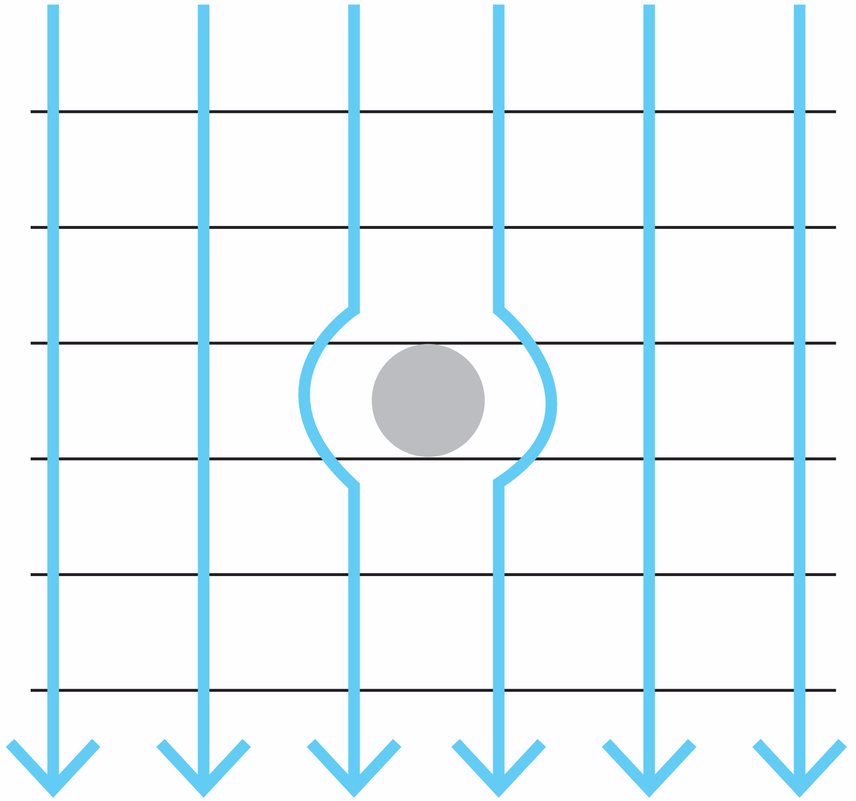


DIFFRAKTION

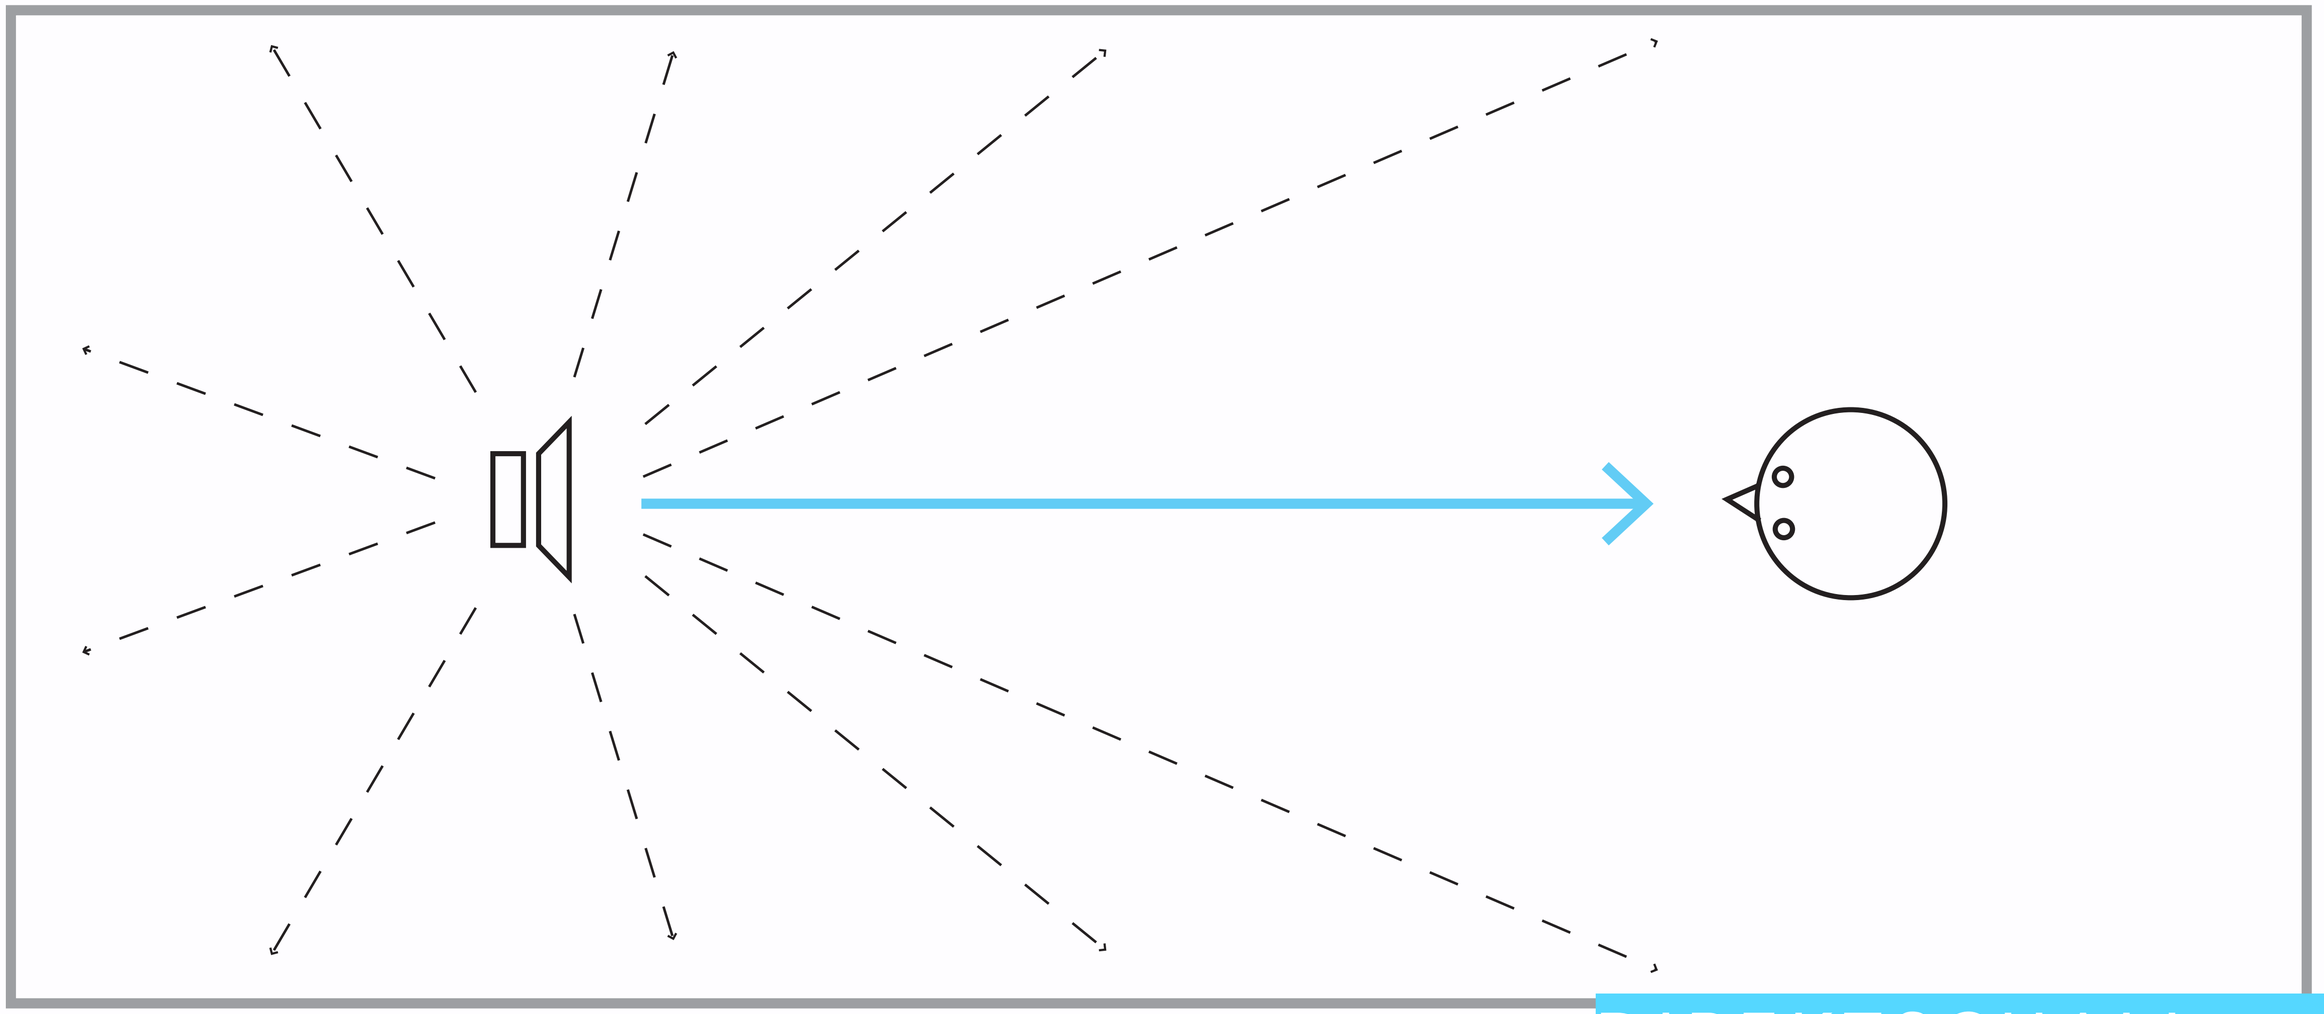


DIREKTSCHALL

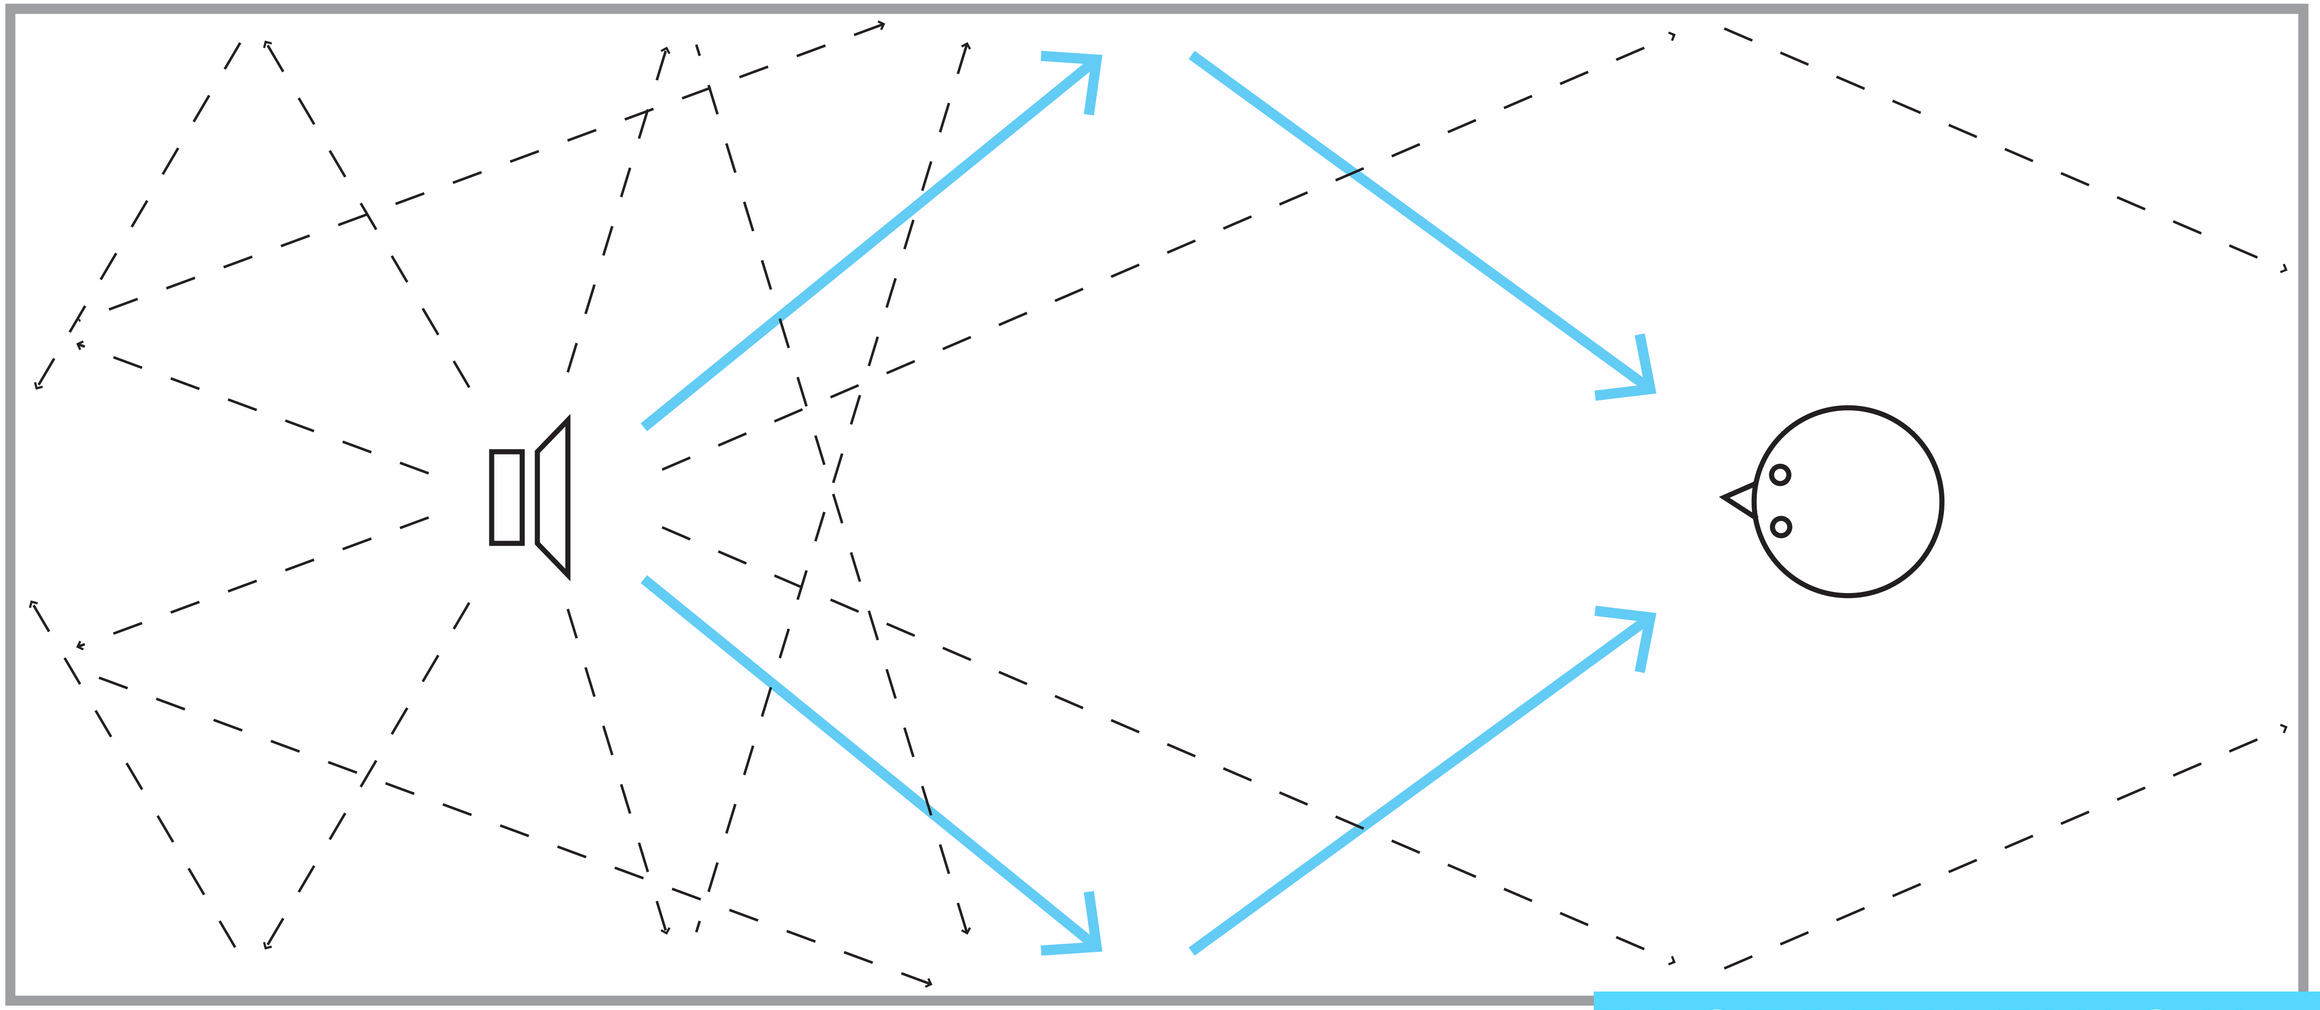

ERSTREFLEXION

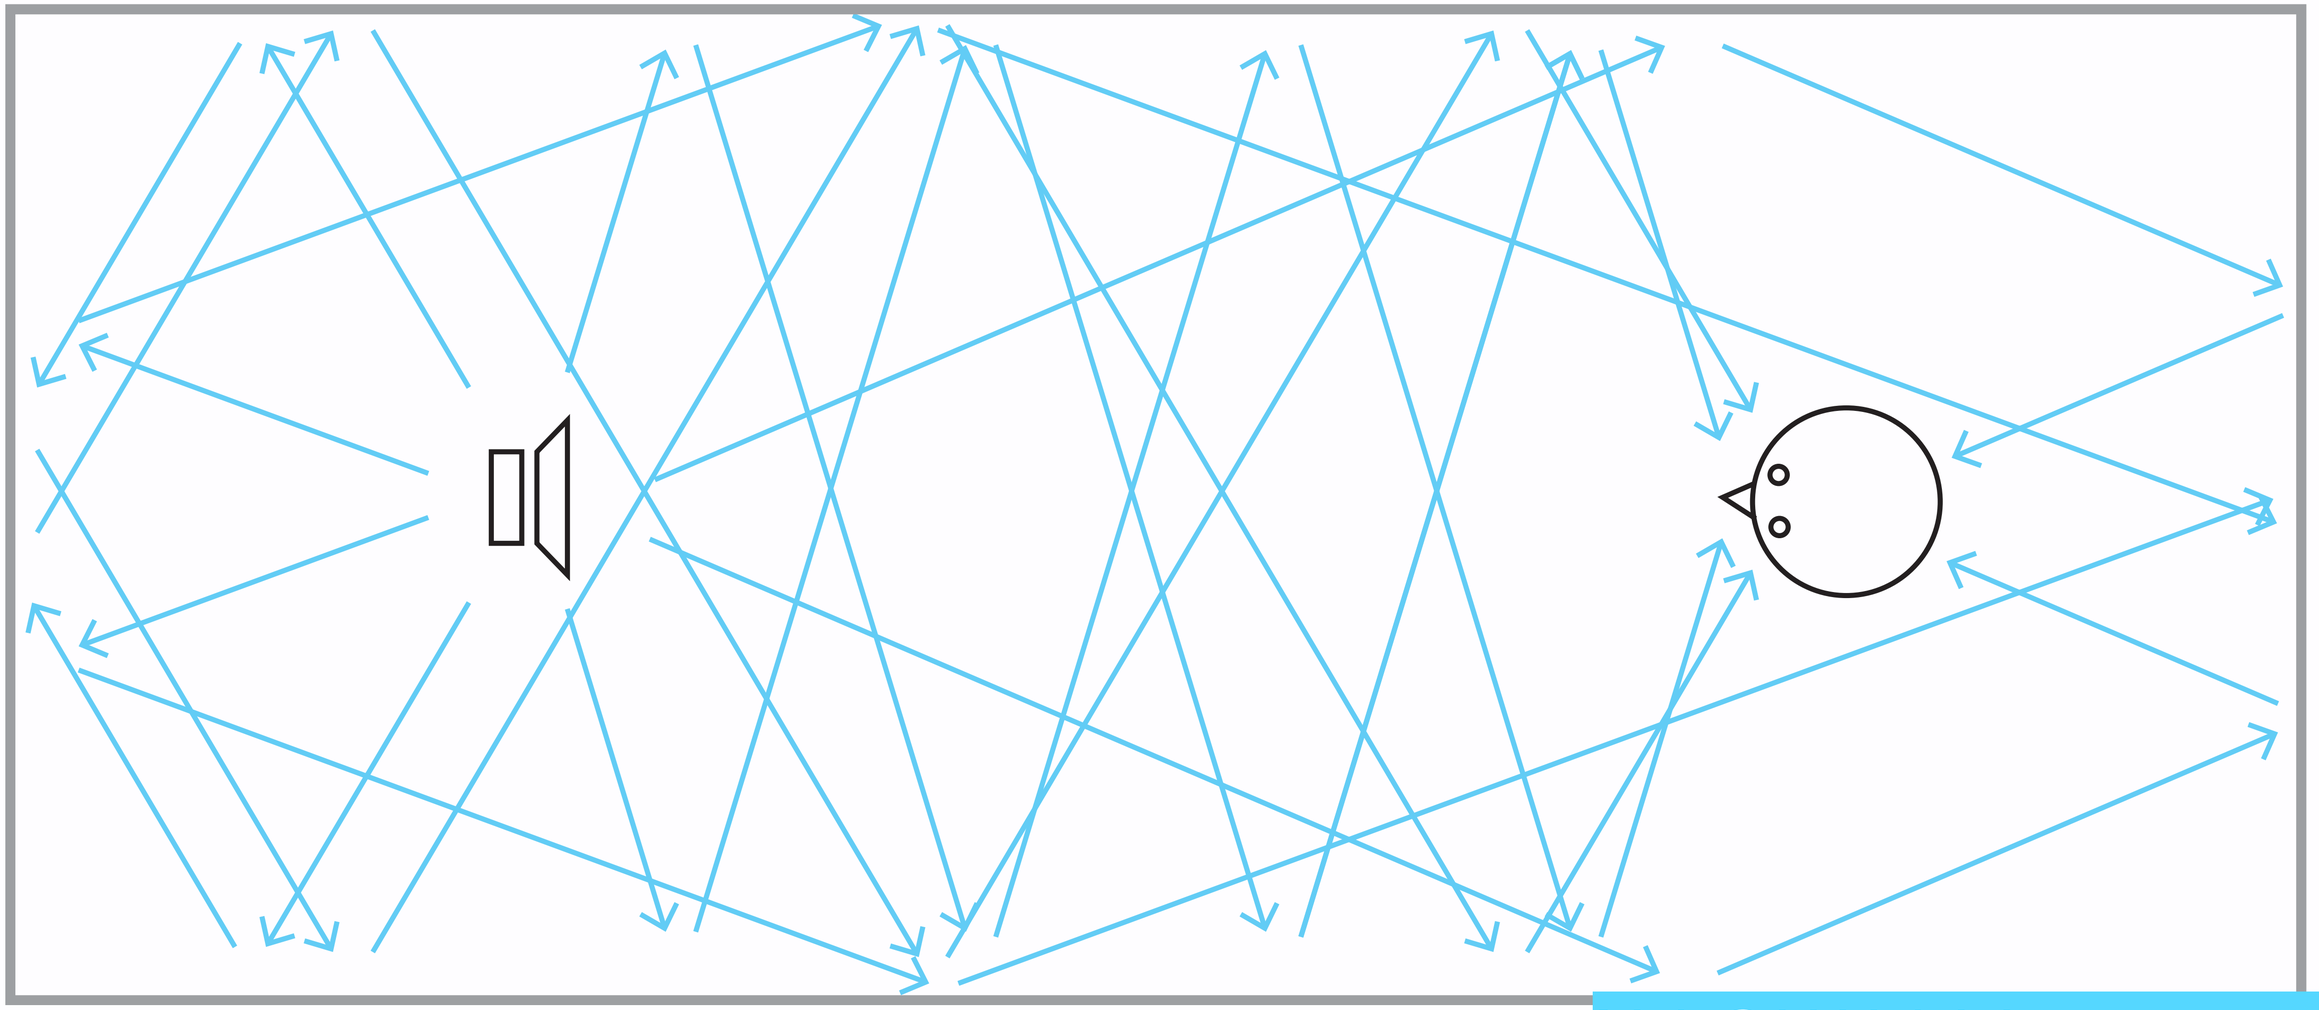

NACHHALL

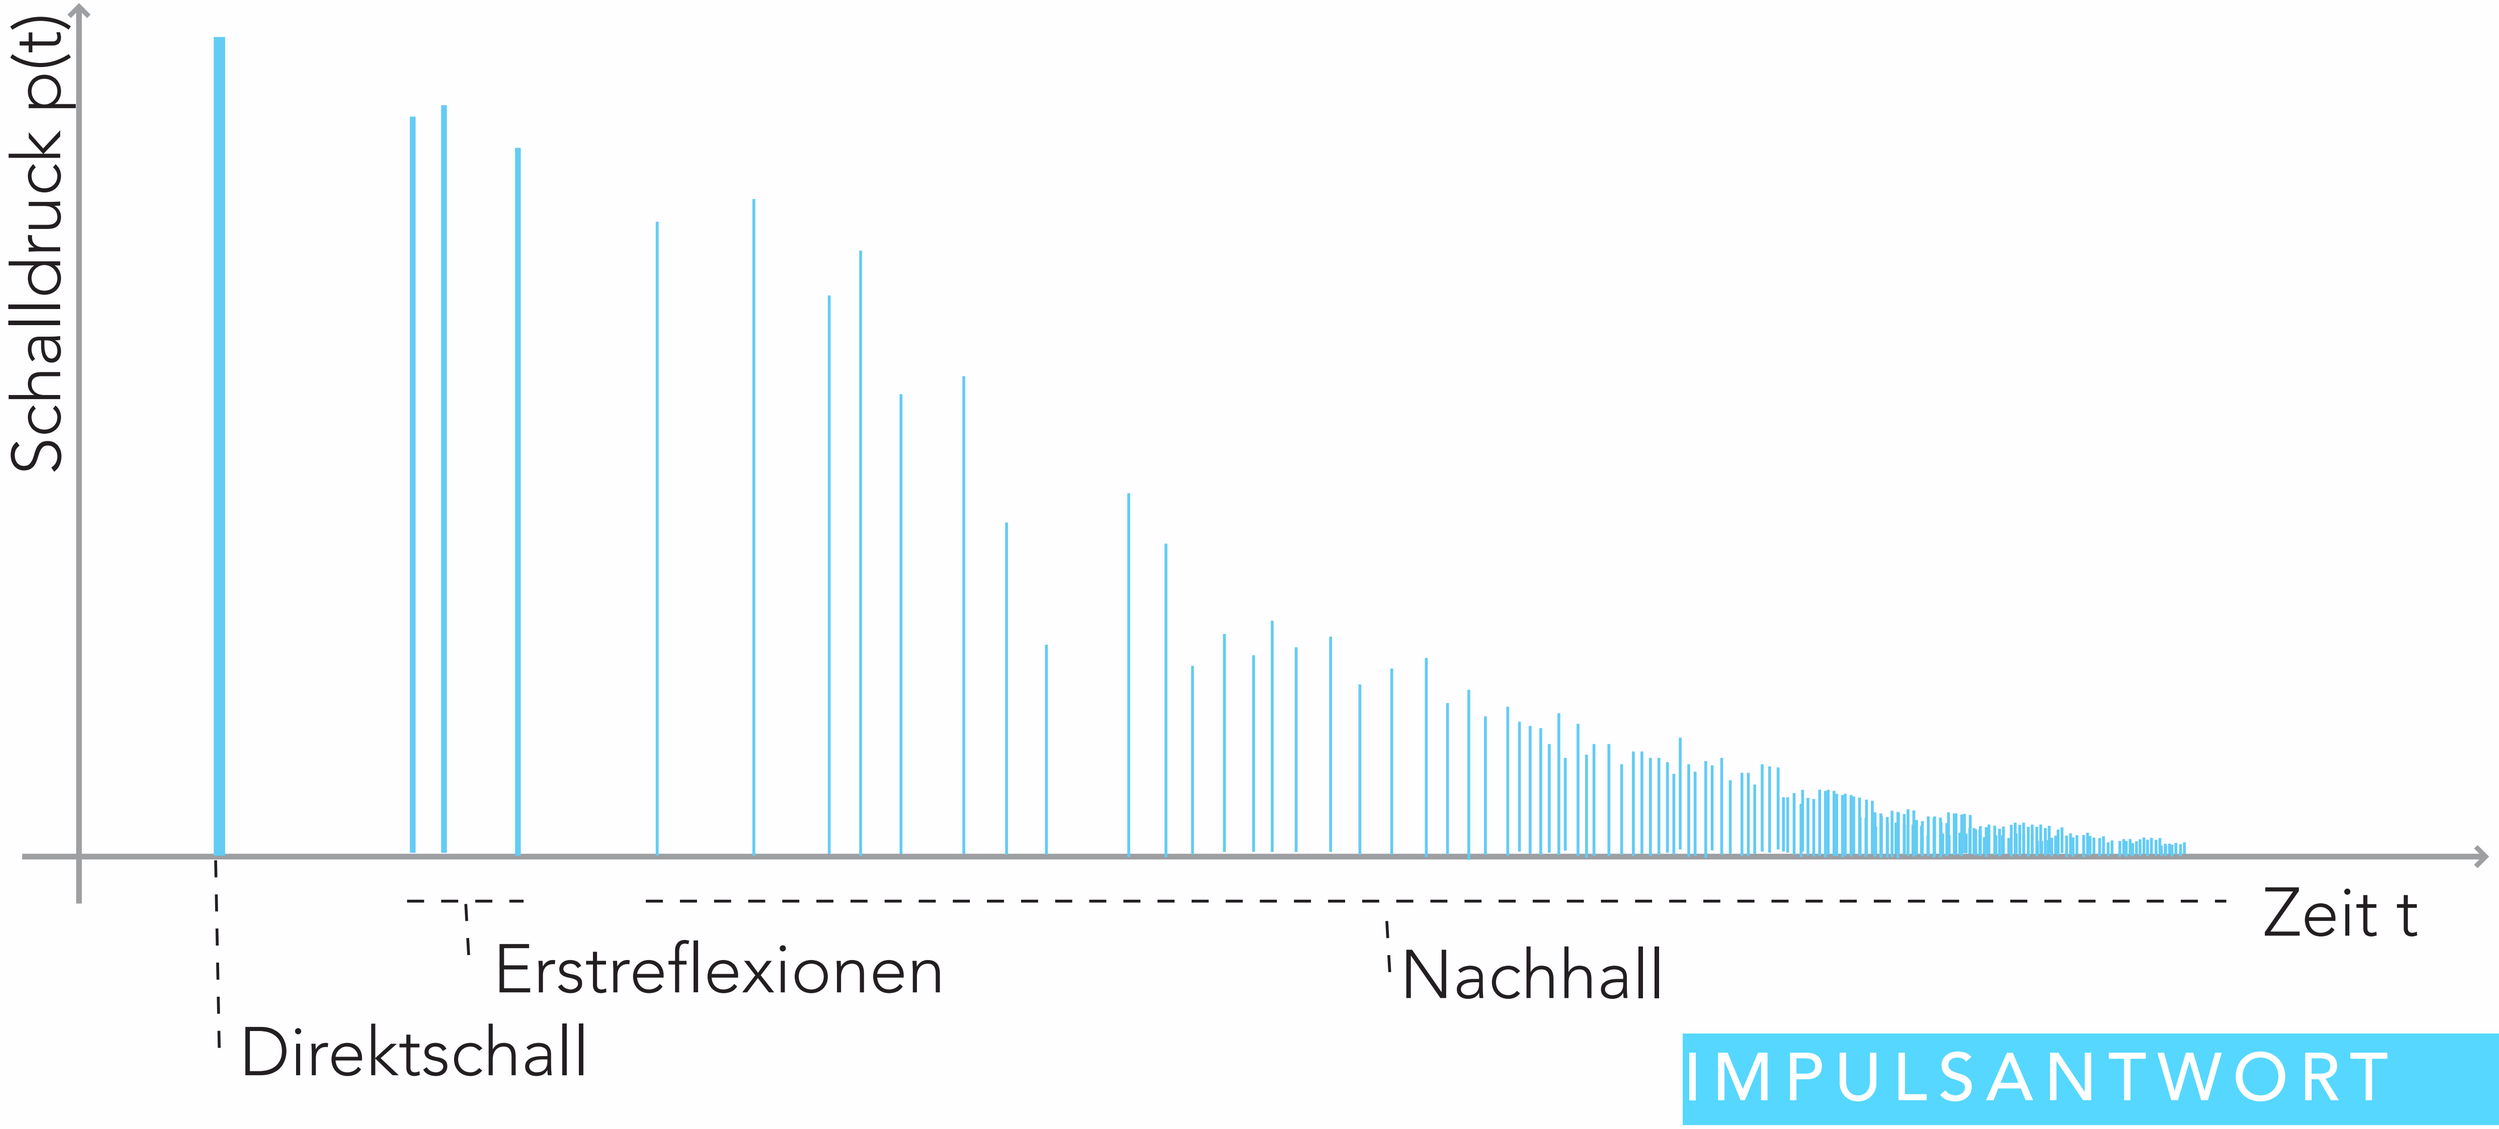

IMPULSANTWORT



RAUMGRÖSSE

0ms — Kammfilter — 20ms


20ms — Raumgröße — 50ms


50ms — Echo — >50ms

VERZÖGERUNG


TASCAM
REW
IN USE ONLY
TC/PILOT
PHONES
LEVEL
BATT.
MIKES
LINE
NRS
NORMAL
SMPTE - EBU TIME CODE
SHIFT
EXECUTE
CALL TC
EXT TC
CALL UB
INT TC
ENTER
SEARCH TC
RESET TC
CLEAR
SET FROM EXT
RECORD
TEST
NO LIMITER
TAPE
DIRECT
STOP
PLAYBACK
LINE & PHONES
METER
POWER

AUDIO DEMO

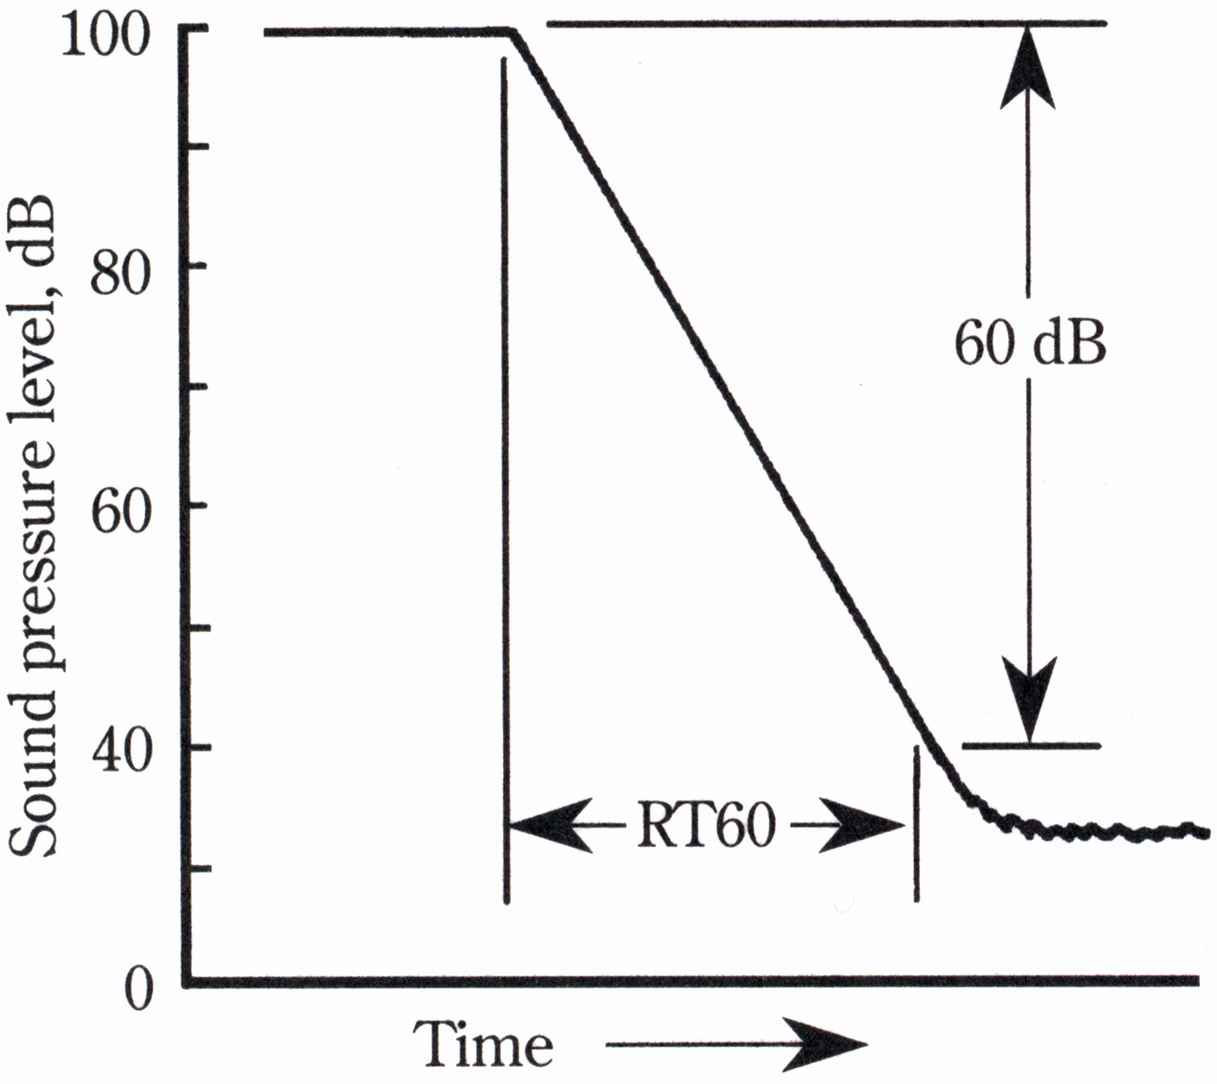

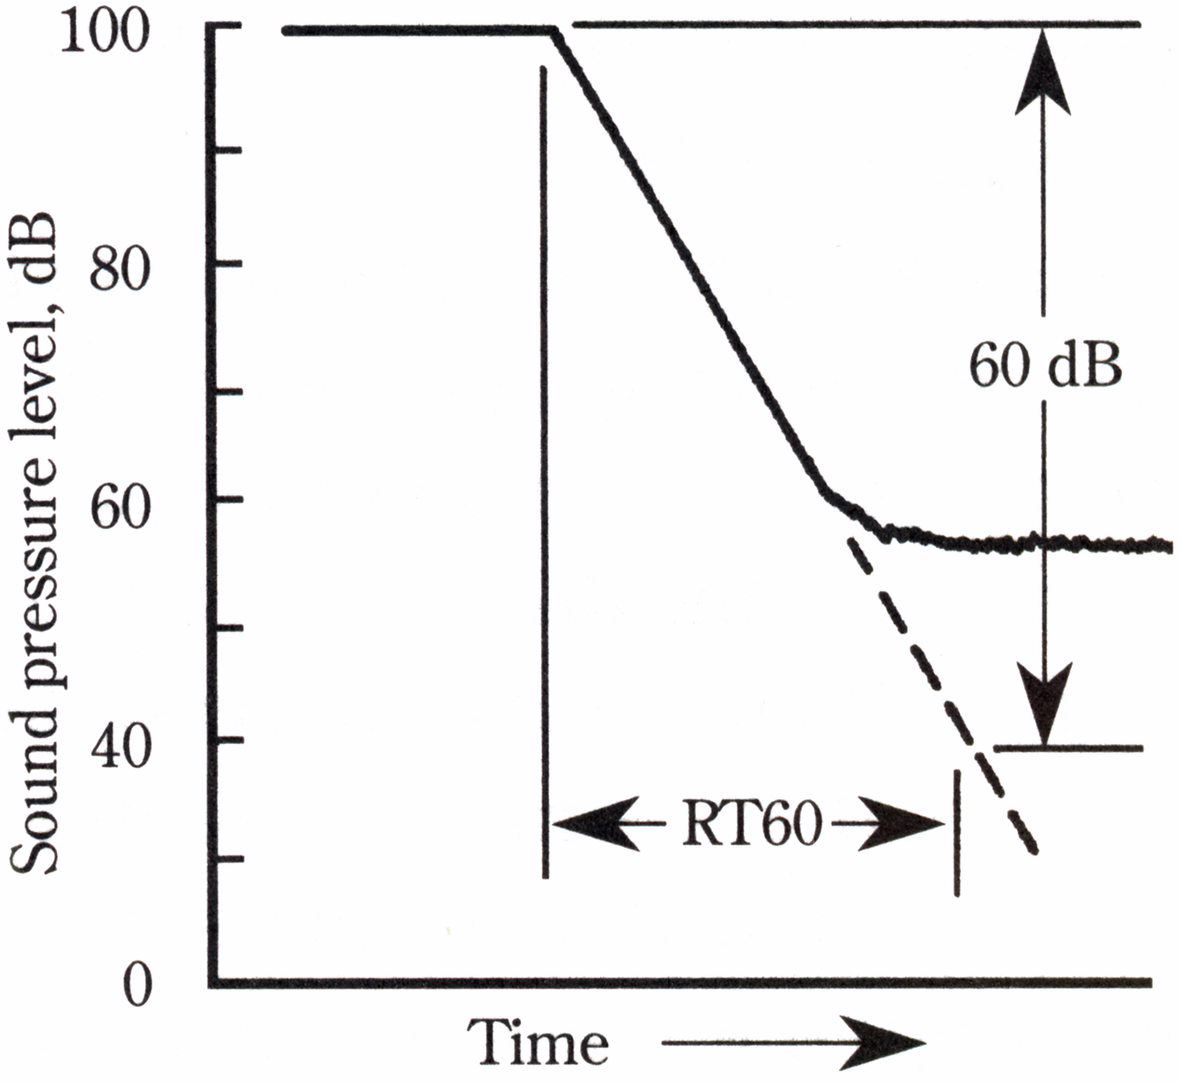

NACHHALLZEIT