



INDIVIDUAL PERFORMANCE CURVE


D03U-SHN
DK004X4

Note: Mechanical seals friction losses are included in motor efficiency data.

Vermerk: Reibungsverluste der mech. Dichtungen sind im Motoren-Wirkungsgrad enthalten.

T Denotes tolerance in accordance with ISO 9906:1999 Annex A.2


T Toleranz-Kurven gemäss ISO 9906:1999 Annex A.2



D = 50 mm

Speed: 1462 rpm

Drehzahl: 1462 min⁻¹

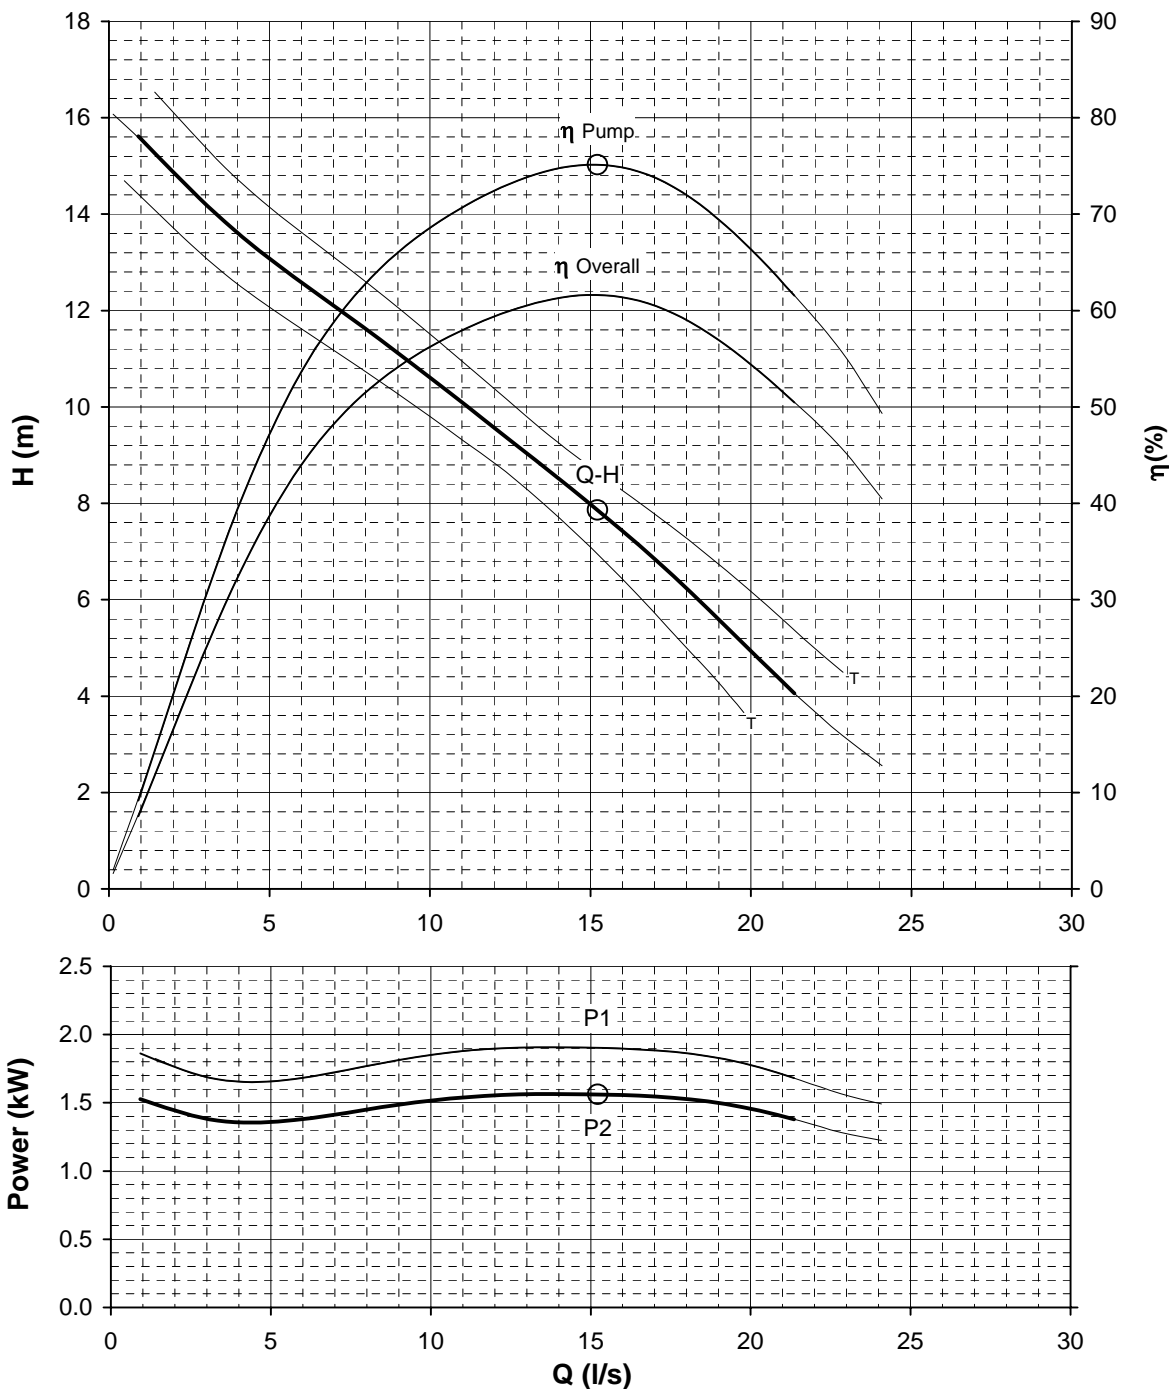

Draw By / Date

DGC/14.09.06

App. By / Date

No: 03-K6631d