

6DOF elevator response

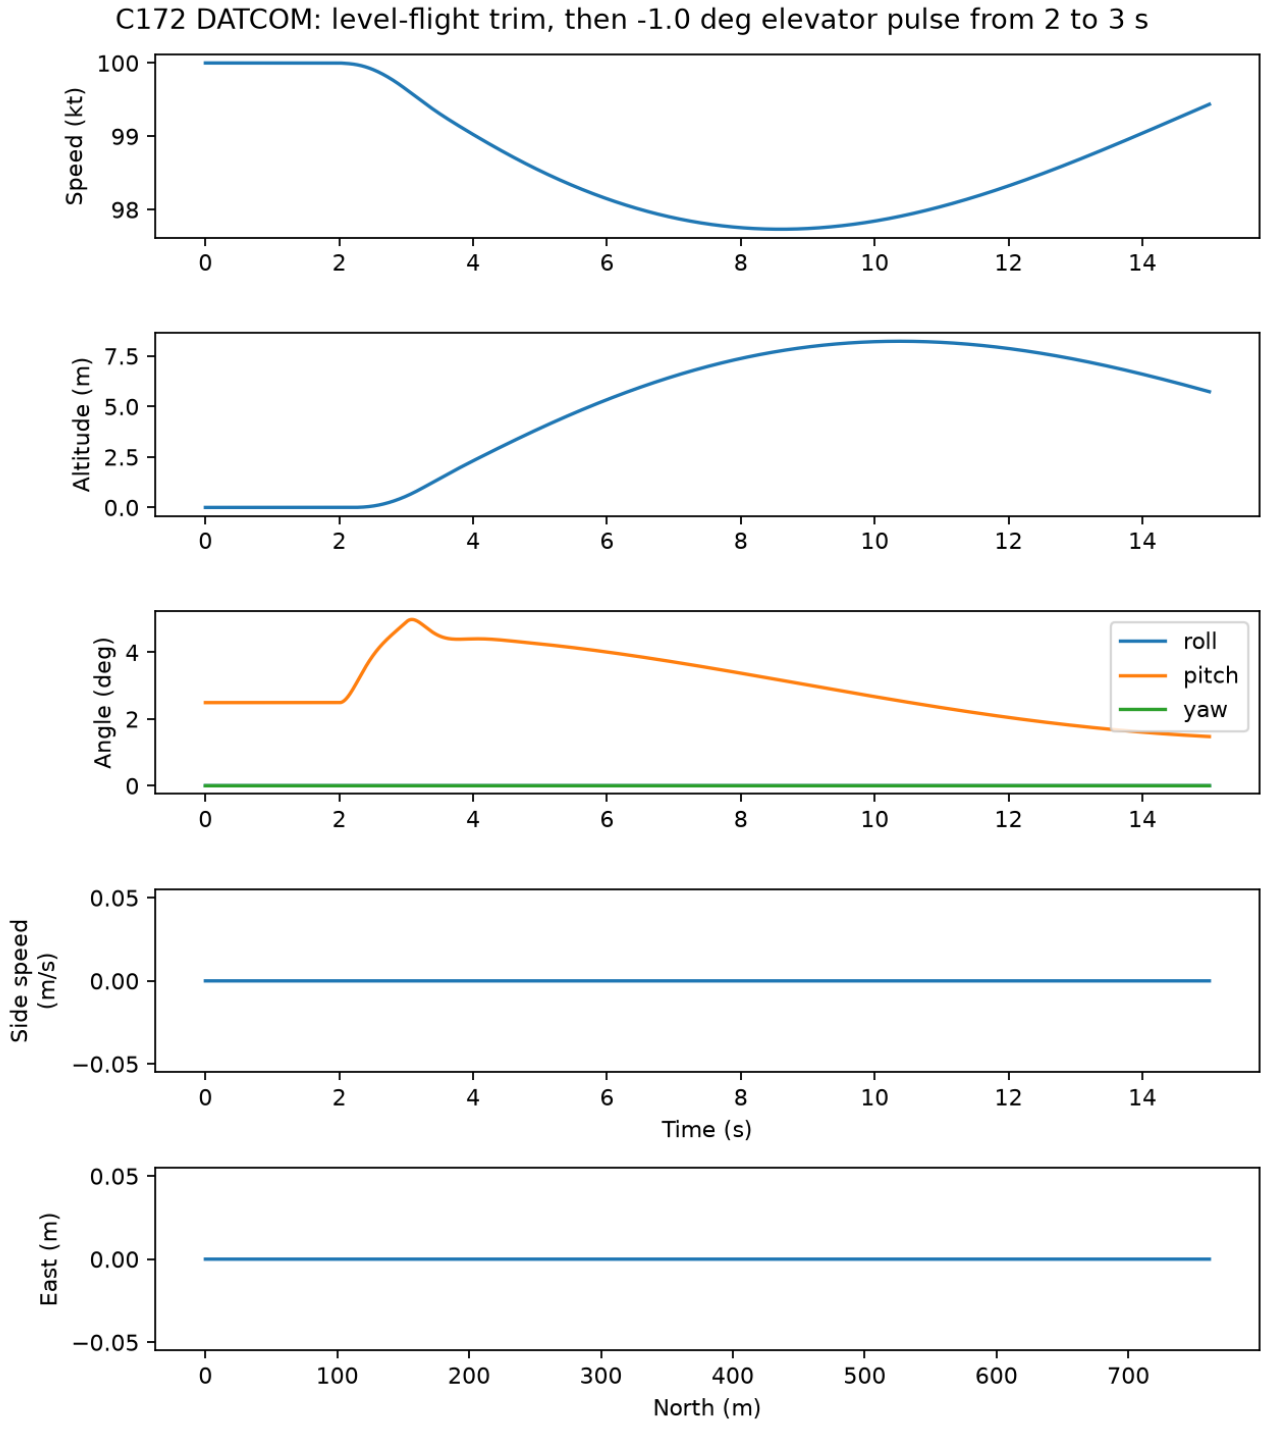


Starting in level-flight trim at 100 kt and 0 m, with pitch 2.49 deg, elevator -1.38 deg and fixed 80.7% throttle, the model receives an additional -1 deg elevator input from 2-3 s before returning to trim elevator.

Elevator required for level flight

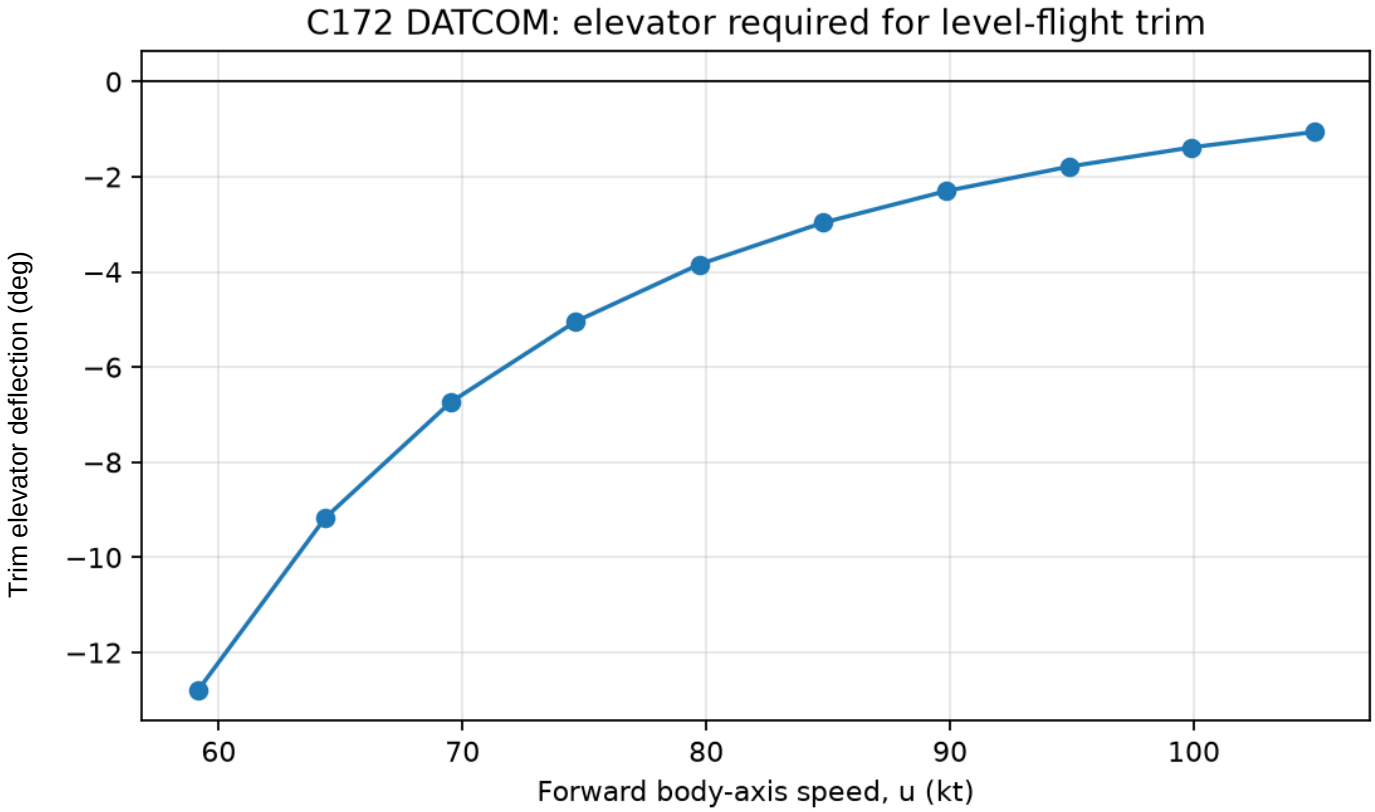

Independent level-flight trim calculations at 0 m request 55-125 kt in 5 kt steps, solving pitch, elevator and throttle at each speed.

2D untrimmed elevator response

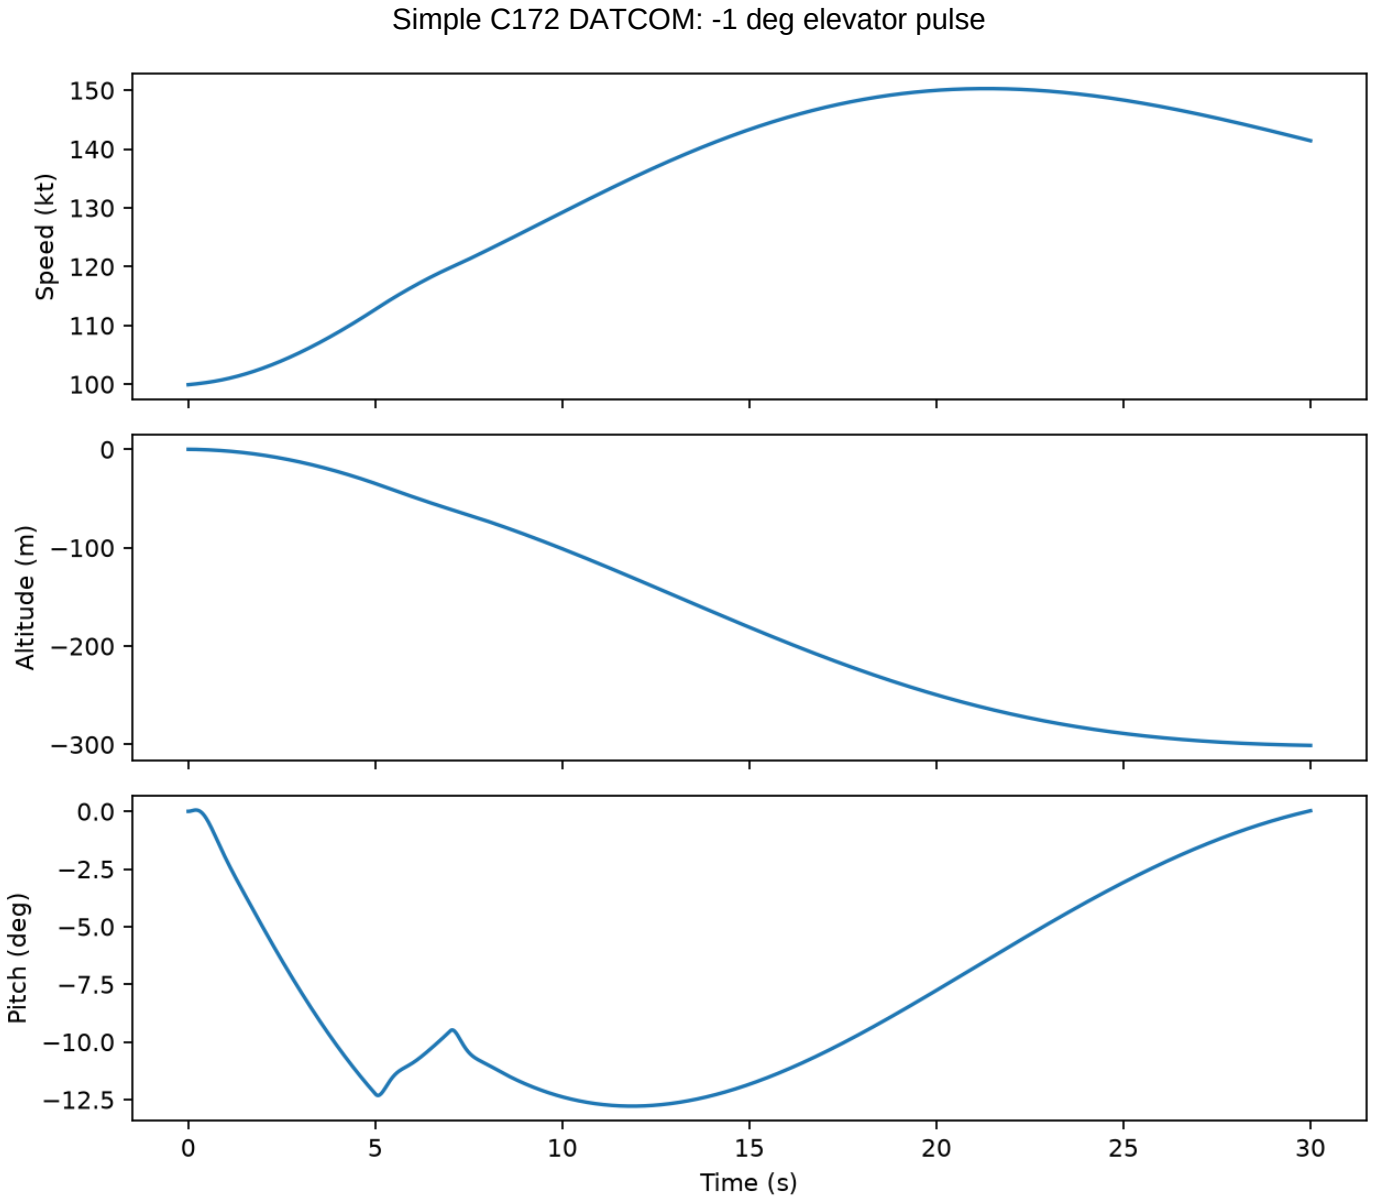

Starting untrimmed at approximately 100 kt and 0 m, with zero pitch, flight-path angle and pitch rate, the model holds 60% throttle and neutral elevator except for a -1 deg input from 5-7 s.