





ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	COMPONENT NOTES
1	50-00040	Connector, 4C audio jack, 2.5x6.0xL17.3 mm, brass, nickel plated, molding style	1	
2	30-00495	Wire, 3C TS, 28 AWG, 150V, 70C, 2.8 mm, spiral shield, TPU, WBL	1	
3	24-00036	Overmold, PVC	1	black
4	Heat Shrink	Heat shrink tubing	1	black

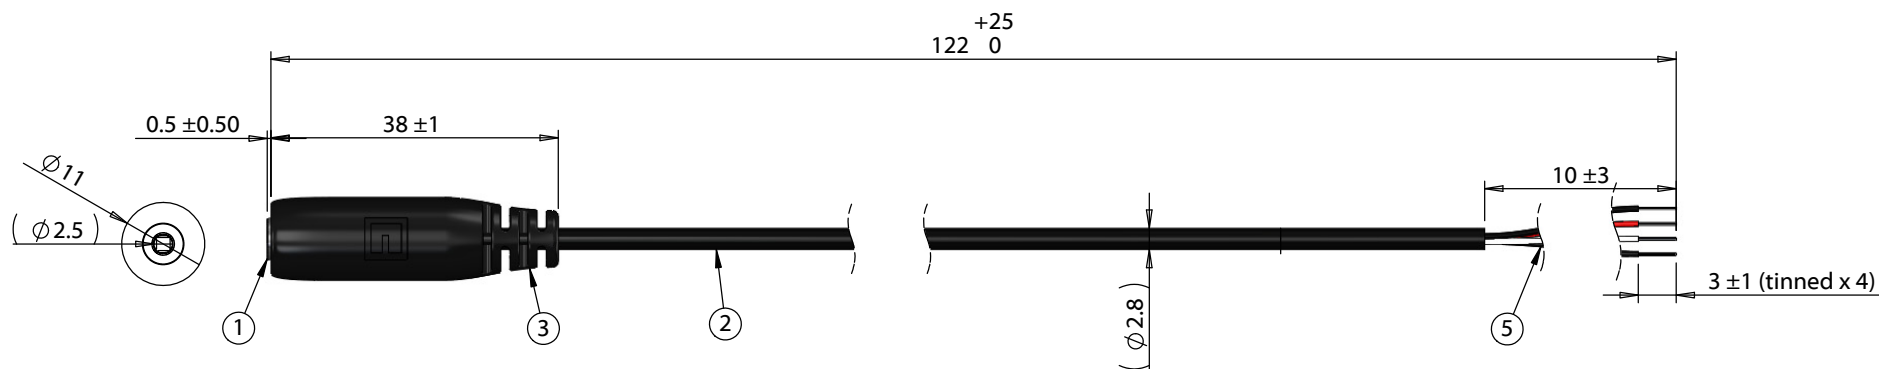

Wiring Diagram	
50-00040	wire color
A	red
B	white
C	black
D	shield/black

Notes:
Functionally equivalent components may be substituted

Revision:	Date:	Description:	Prepared:	Notes: RoHS and REACH compliant Function test: no open, no short circuit, no intermittent	<div>TENSILITY</div> <div> tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com </div>	
A	03/14/2018	Initial release	Verified:			
			Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	Description: Cable, 122 mm, 2.5 mm 4C 50-00040 audio jack to stripped and tinned, 28 AWG, 30-00495 wire	Size: A	Part number: 10-02973
					Scale: 1:1	  Sheet 1 of 1

5

4

3

2

1