


ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	COMPONENT NOTES
1	50-00550	Connector, 4.75x10.2mm SAE, brass nickel plated, molding type	1	
2	30-00985	Wire, 1C TS, 10 AWG, UL1015, 600V, 105C, 4.6 mm, VW-1, PVC, 85A, red	1	UL recognized or listed wire
3	30-00986	Wire, 1C TS, 10 AWG, UL1015, 600V, 105C, 4.6 mm, VW-1, PVC, 85A, black	1	UL recognized or listed wire
4	24-00229	Overmold, SAE, with cap	1	black

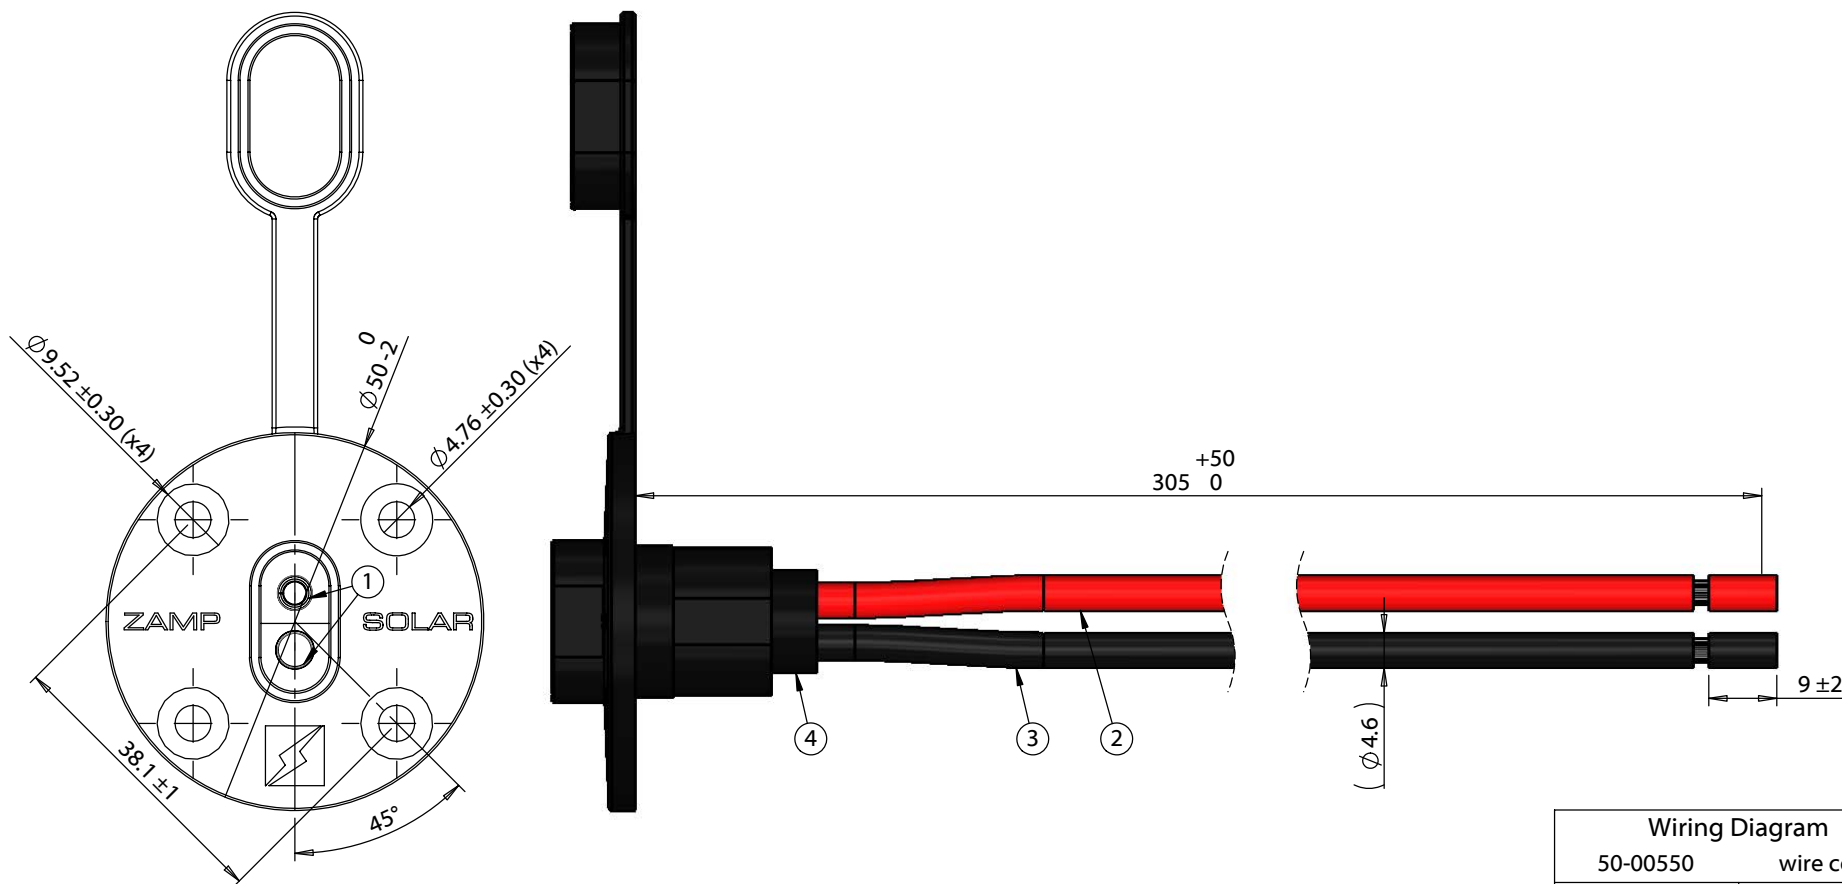

Revision:	Date:	Description:	Prepared:	Notes:	<div>TENSILITY</div> <div> tel 1.541.323.3228 800 877.670.7118  fax 1.541.323.4202 web tensility.com </div>	
A	10/10/2017	Initial release	Verified:	Cartons will ship with UL wire harness label		
A1	12/05/2017	Added UL notes		RoHS and REACH compliant		
A2	03/26/2018	Modified stripping detail		Function test: no open, no short circuit, no intermittent		
A3	04/02/2018	Modified stripping detail	Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	Description: Cable, 305 mm, 50-00550 SAE to stripped, 10 AWG, 30-00985 red and 30-00986 black wire	Size: A	Part number: 10-02880
					Scale: 1:1	Sheet 1 of 1

5

4

3

2

1