




High Speed XTAL




SWD header




RST circuit




I2C header




SMPS resonator




Low Speed XTAL



UART header



PWR Good, REV Bias Protection




about 6uF of power capacitance must be filled before stuff can begin on this board. at 2.2V, thats about 30uJ. ouch.


RF

File: rf.kicad_sch

Decoupling

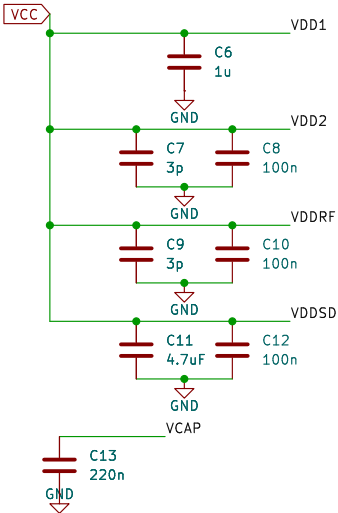


Microcontroller

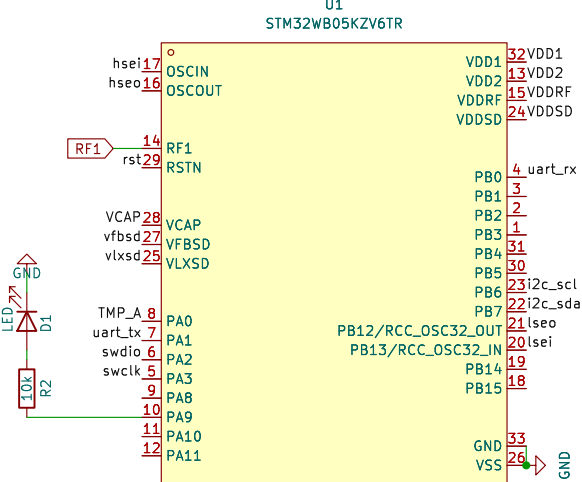


PWR

File: pwr.kicad_sch

STS4L sensor



LMT70 Sensor



Sheet: /
File: rx-pcb.kicad_sch

Title:


Size: A4

Date:


KiCad E.D.A. 9.0.7

Rev:

Id: 1/3

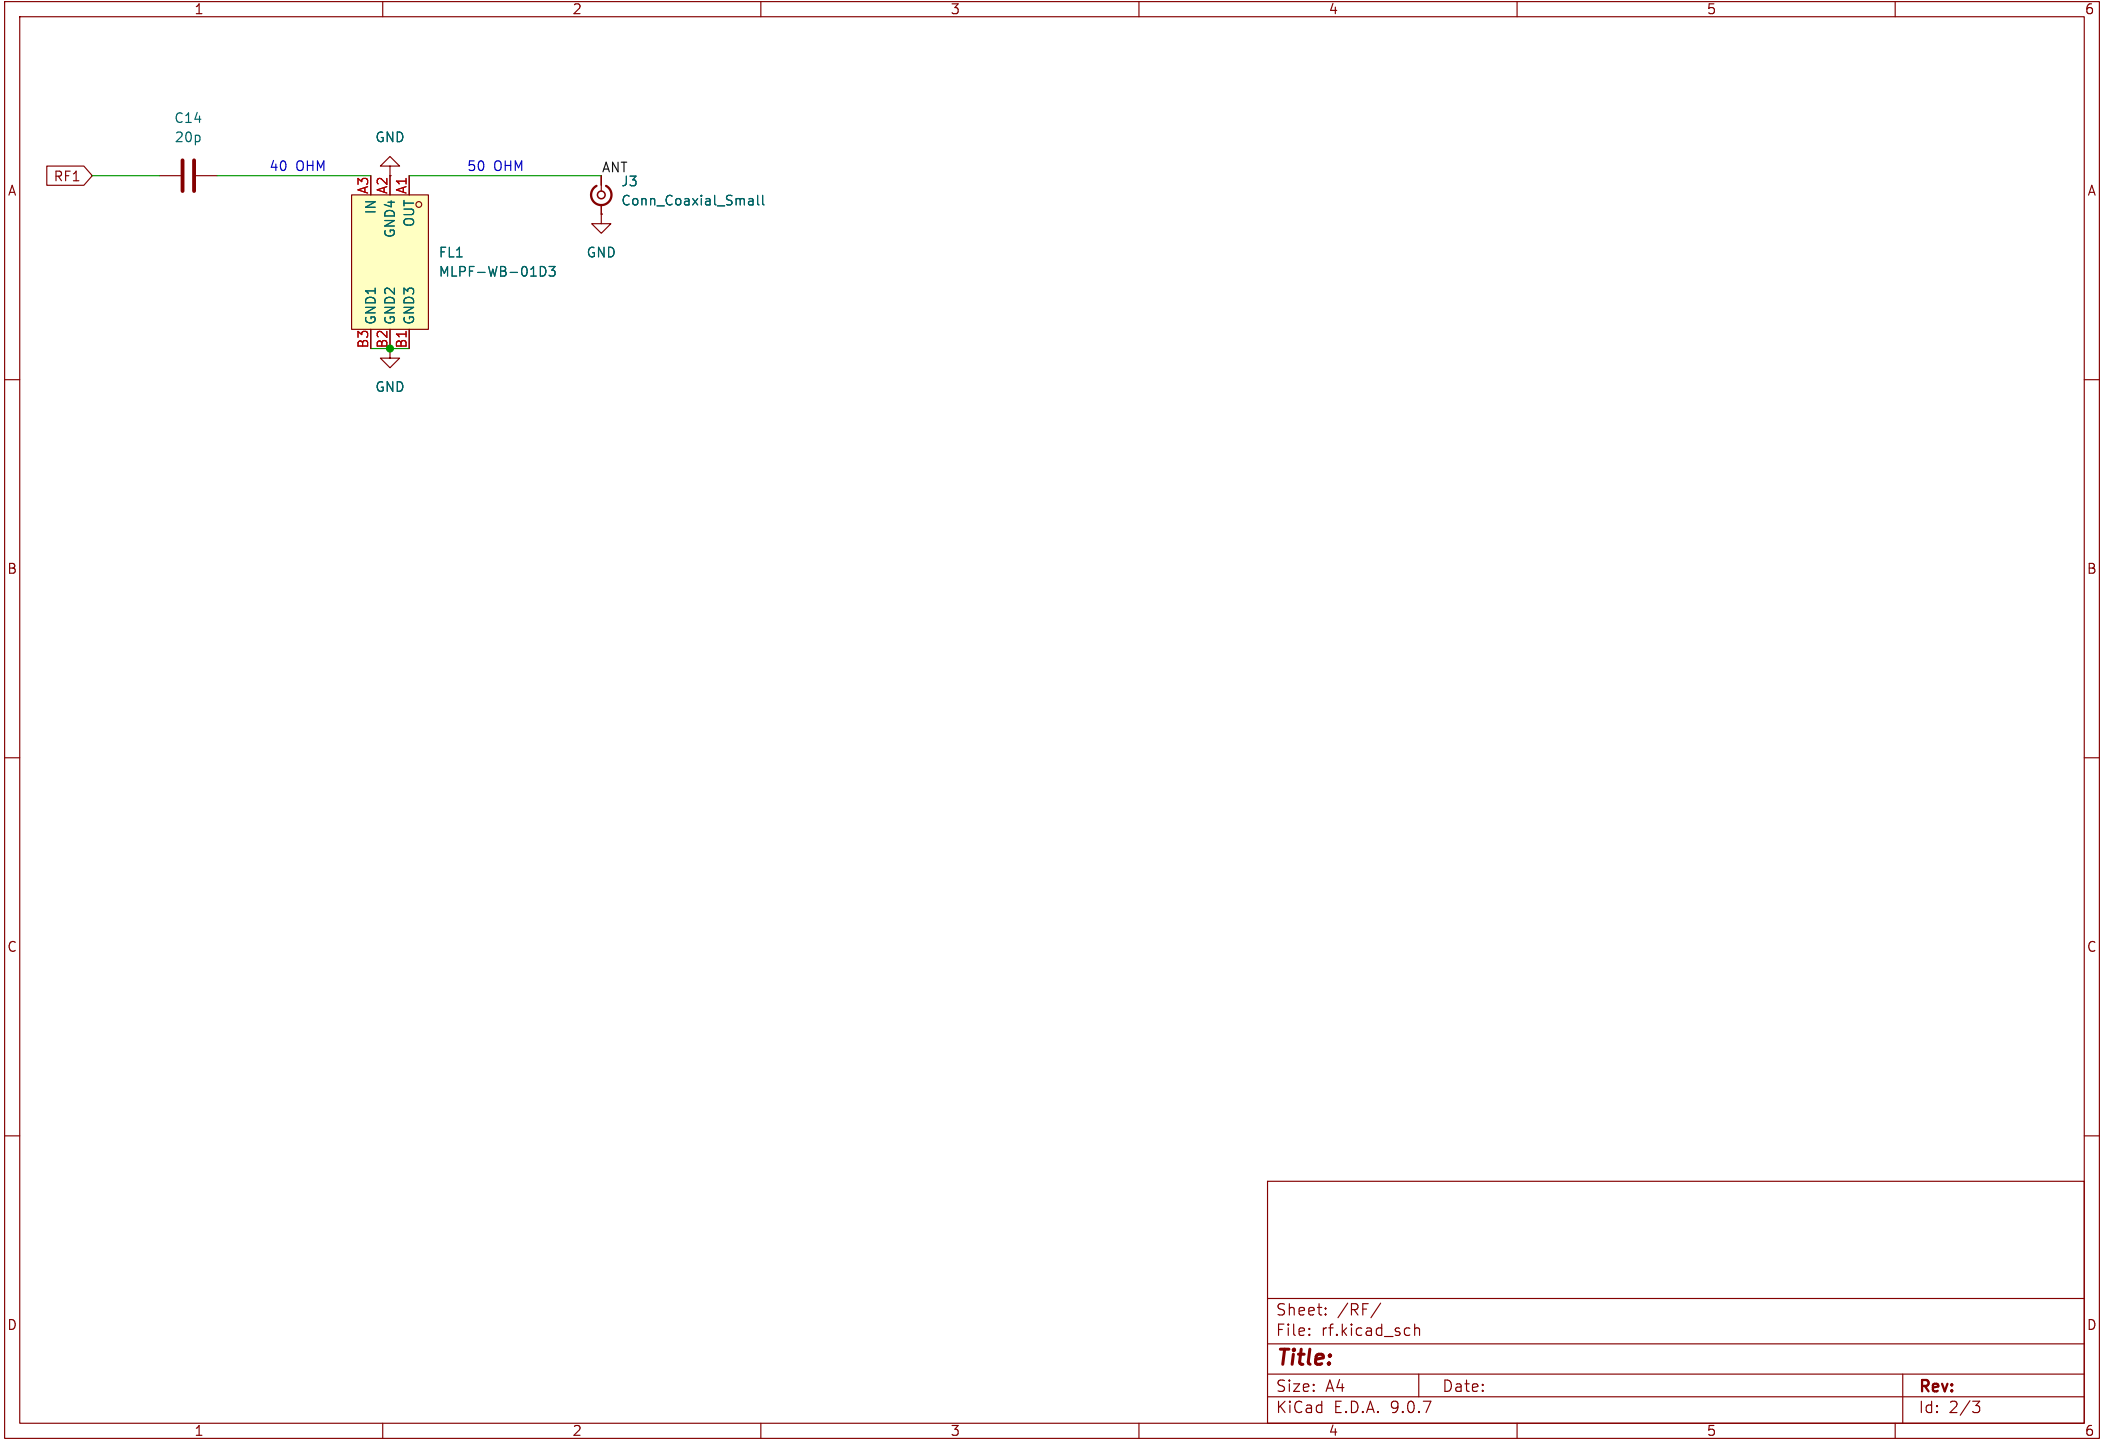

Sheet: /RF/ File: rf.kicad_sch		
Title:		
Size: A4	Date:	Rev:
KiCad E.D.A. 9.0.7	Id: 2/3	

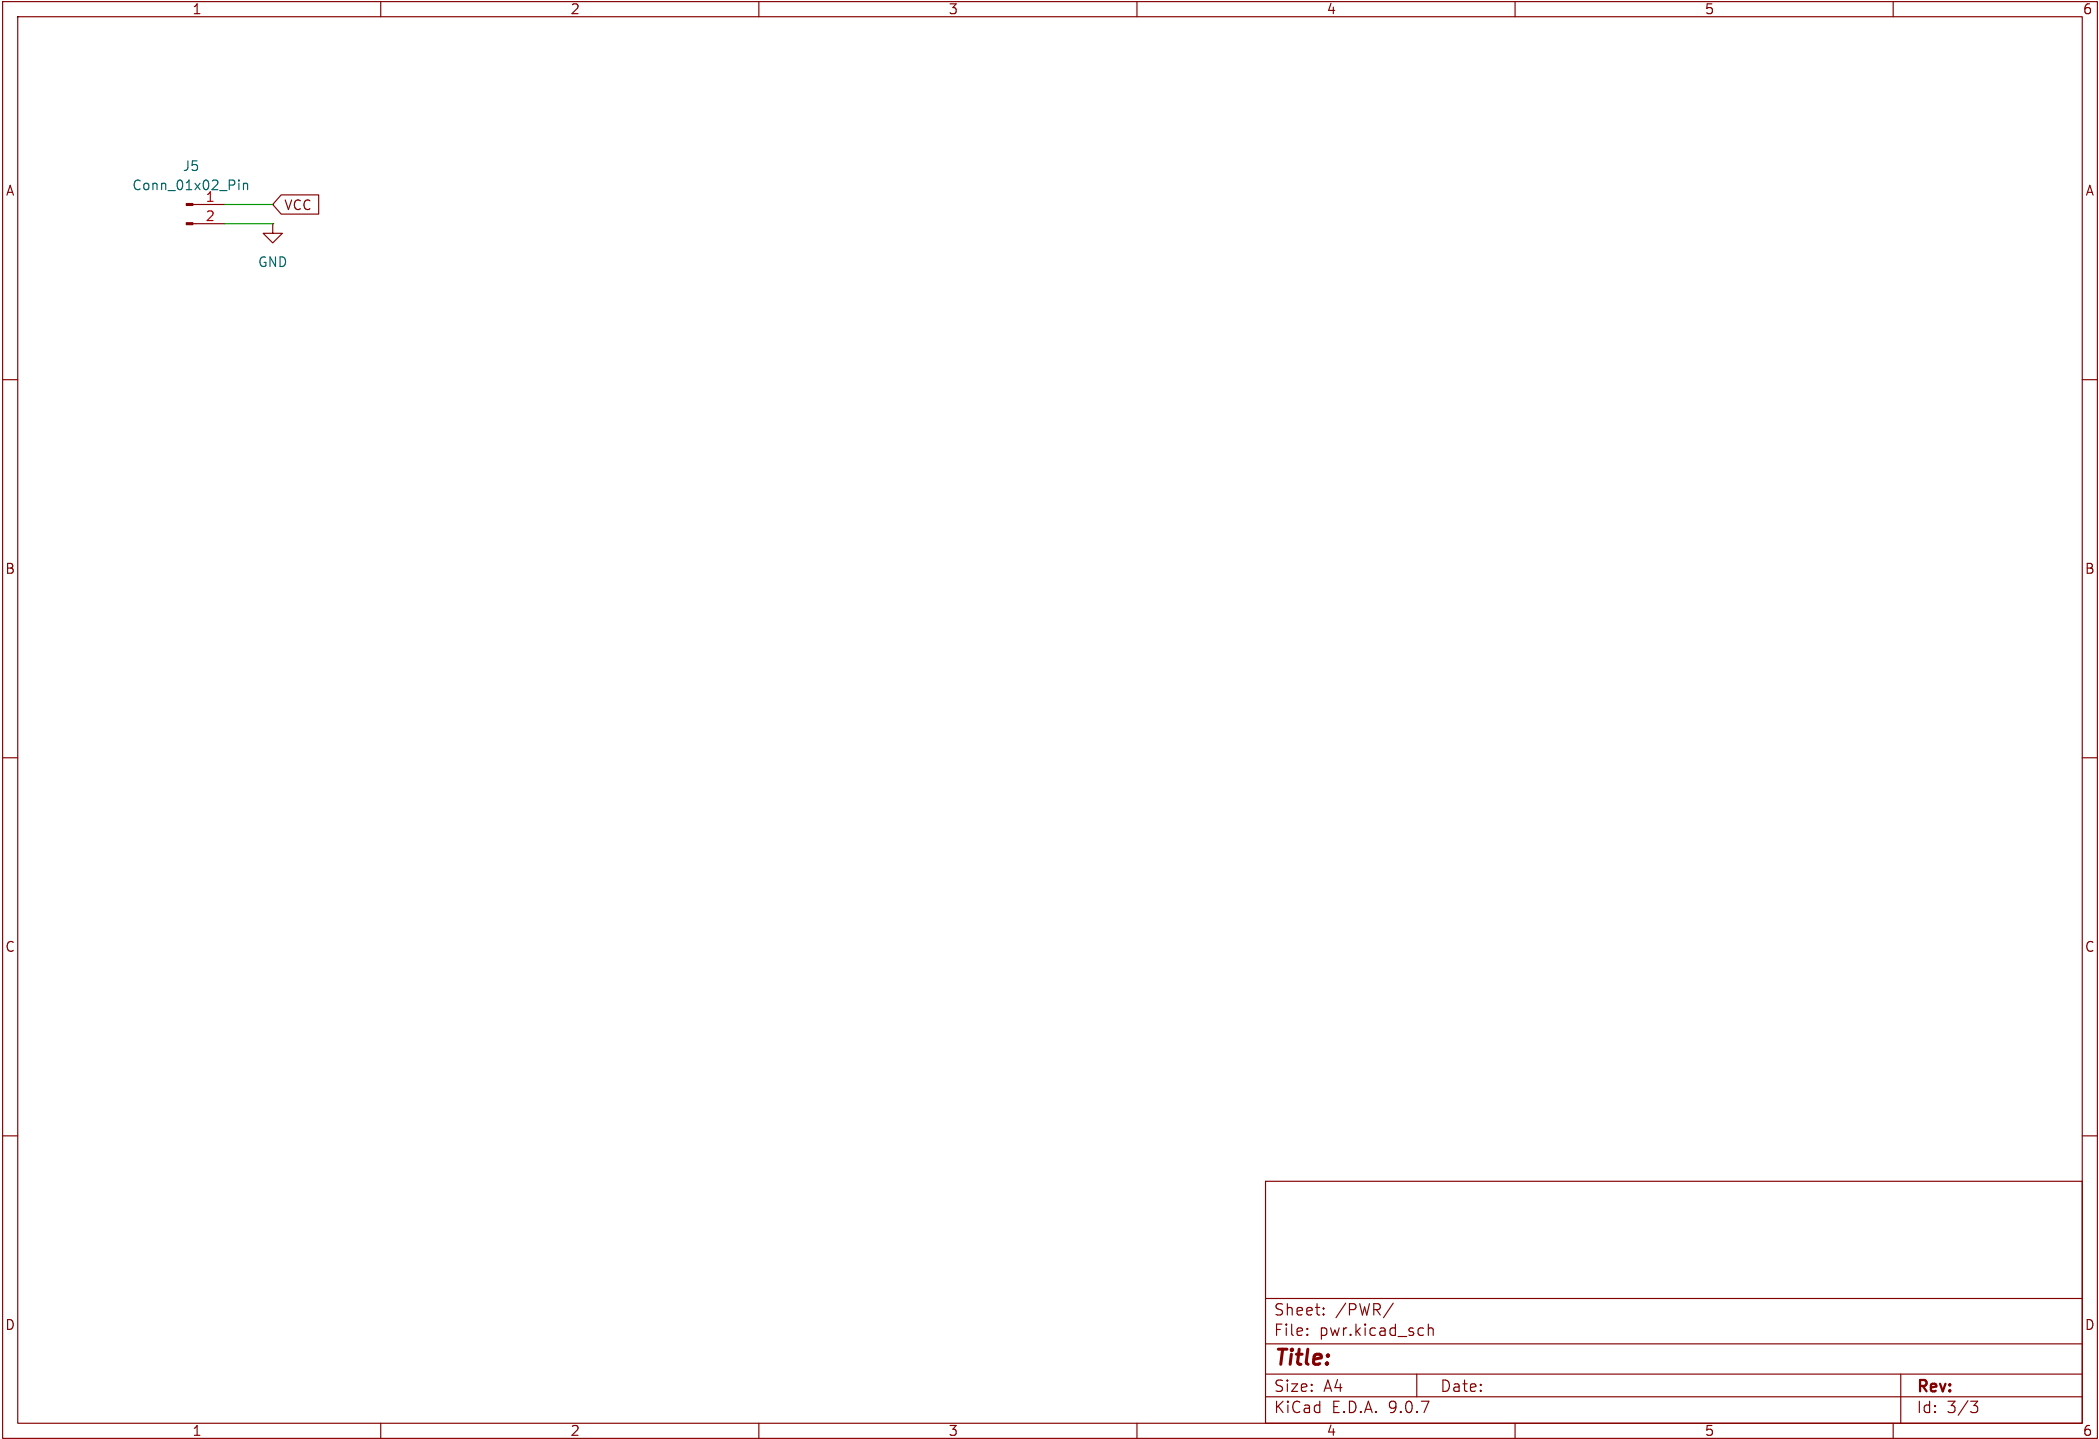

Sheet: /PWR/ File: pwr.kicad_sch		
Title:		
Size: A4	Date:	Rev:
KiCad E.D.A. 9.0.7		Id: 3/3