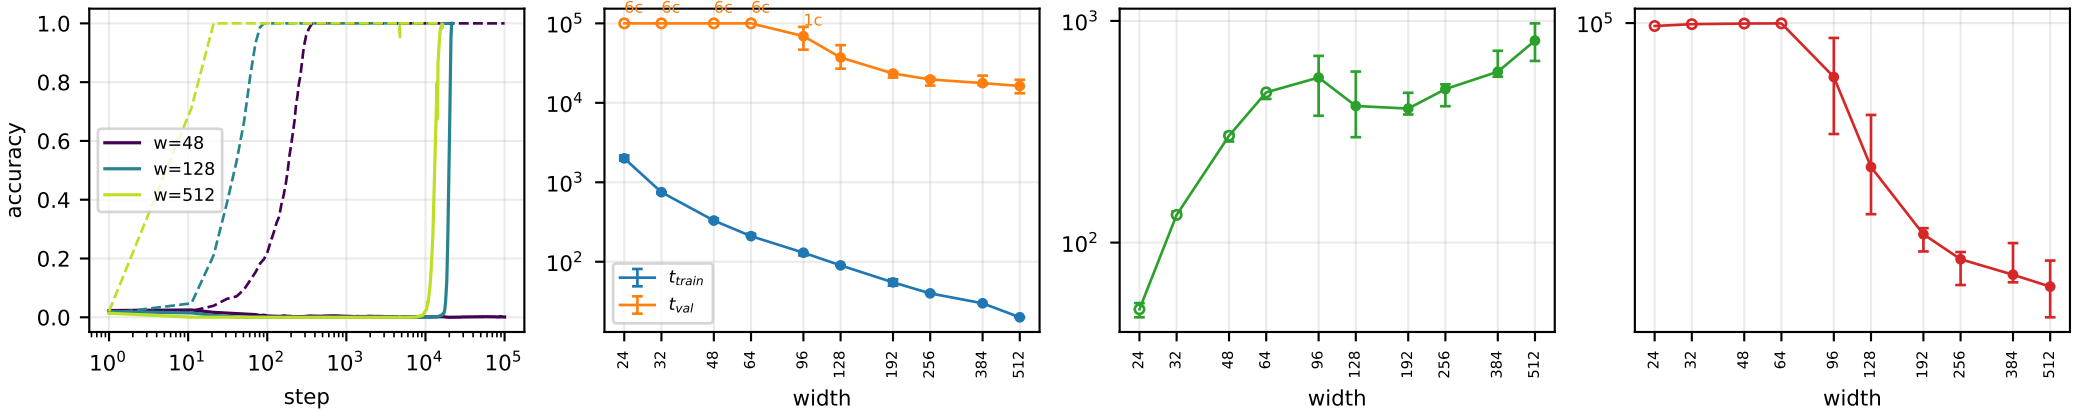
(a) train (dashed) / val (solid)
accuracy
step
w=48
w=128
w=512
(b) time to 99% acc. (hollow: censored)
width
t_{train}
t_{val}
(c) relative delay t_{val}/t_{train}
width
(d) absolute delay $t_{val} - t_{train}$
width