



PROGRAMMABLE INERTIAL DELAY ELEMENT

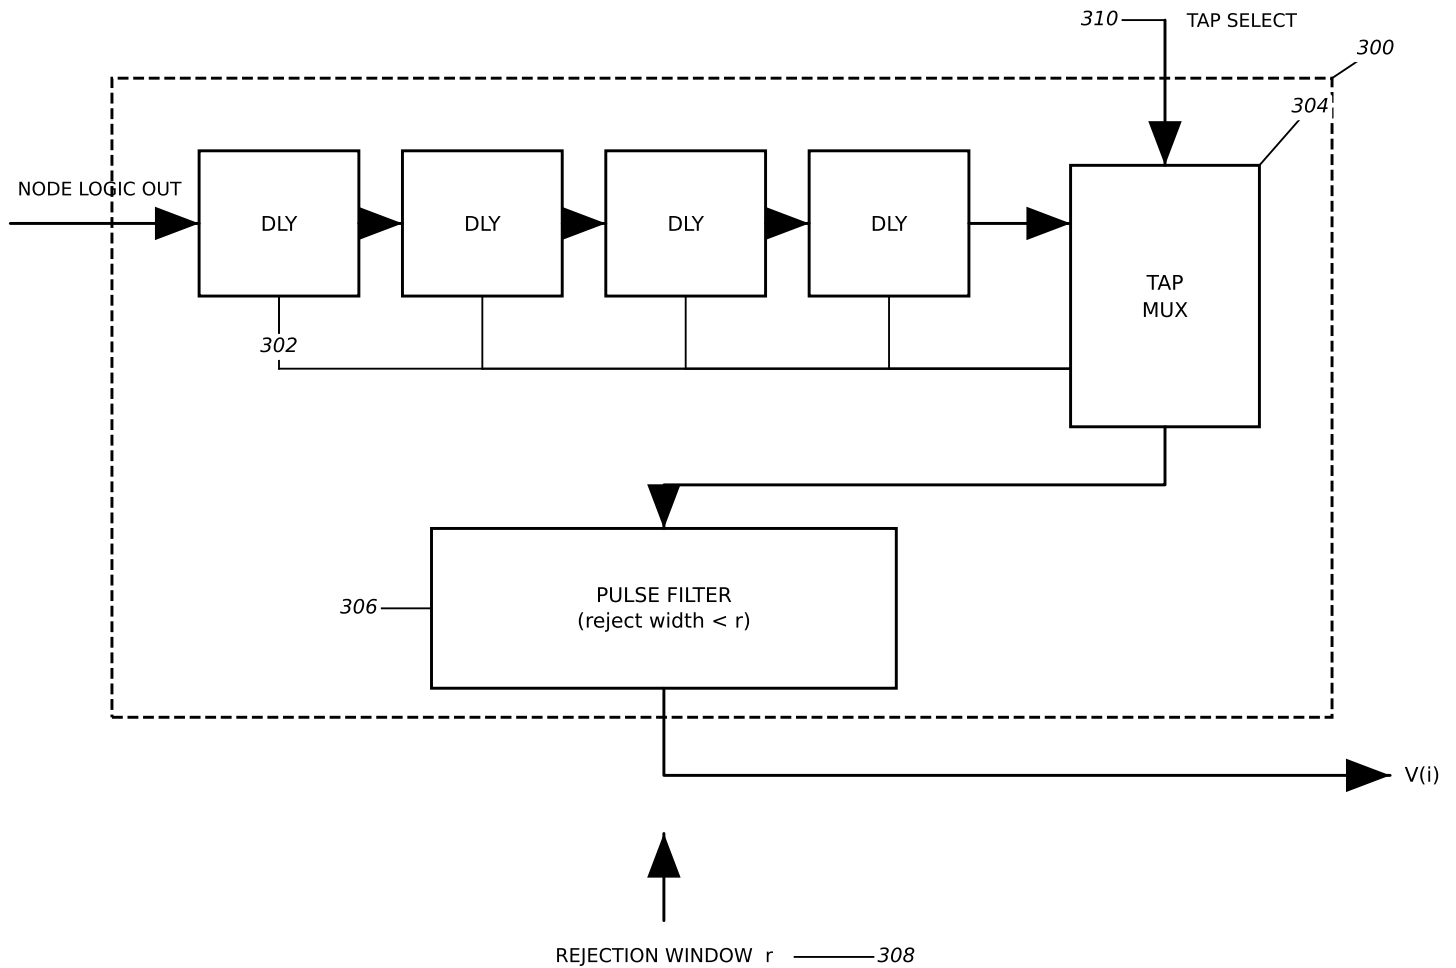

both controls driven by the annealing control (108)

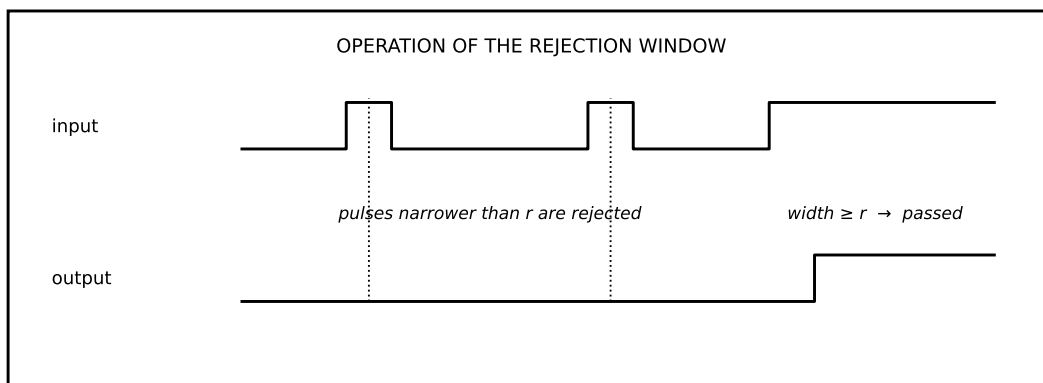

A short rejection window lets hazard pulses through, and those pulses are the perturbation source. A full-width window admits at most one settled transition per evaluation. r is therefore the annealing control variable.

The rejection is not a refinement of this element — it is what makes the schedule work at all. A delay that propagates every transition instead of cancelling superseded ones reaches a fixed point from 1-16% of initial states under the same schedule. See FIG. 12.

FIG. 3