



THE DELAY ELEMENT MUST BE INERTIAL

(A) WHAT THE TWO DELAY SEMANTICS DO WITH A SUPERSEDED TRANSITION

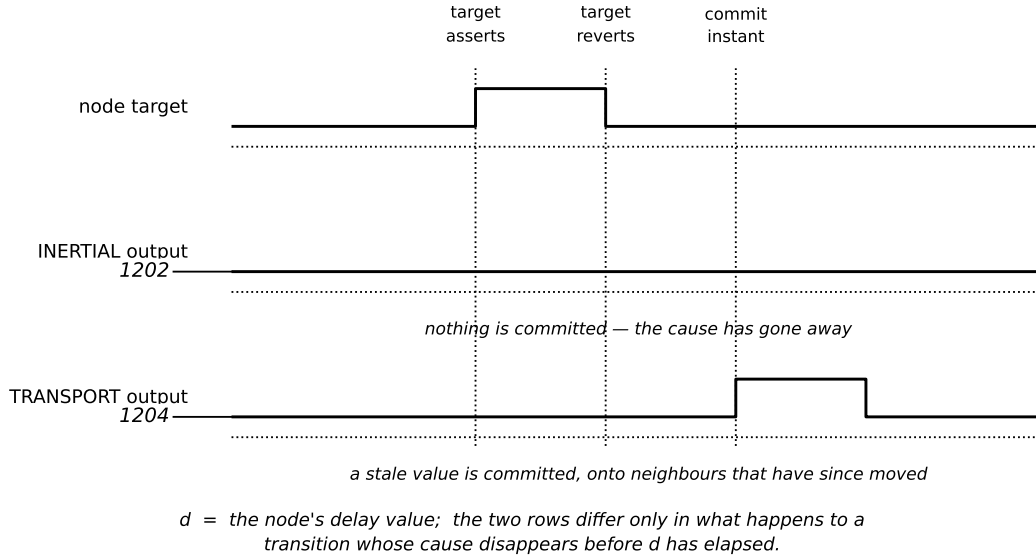

(B) MEASURED CONSEQUENCE

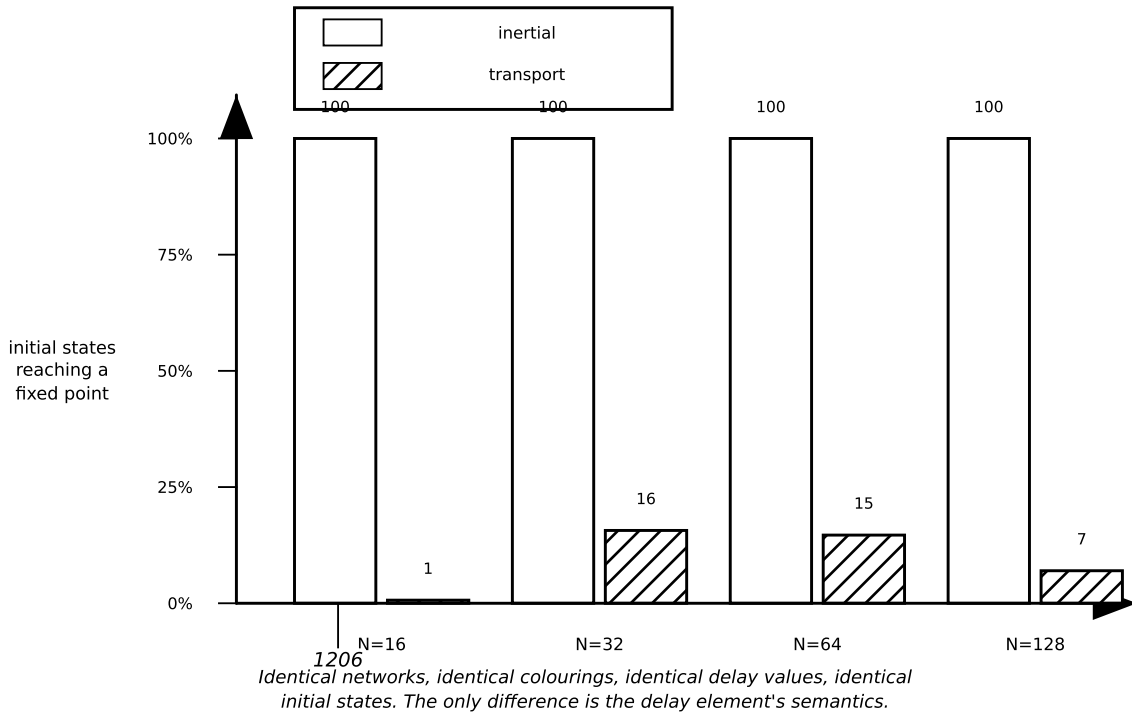

The inertial behaviour is therefore a requirement of the scheduling scheme, not an optional mitigation. It is also something a phase-shifted clock cannot supply: a clocked node samples its input at an edge, and a transition that appeared and disappeared between two edges is simply not seen — there is nothing for the node to cancel, and nothing to sequence.

Delays here are consecutive multiples of one scale factor. Delay pools spanning powers of two, primes and an incommensurate ratio were also measured and are indistinguishable, so the values matter only in being distinct — see FIG. 6.

FIG. 12