



PROGRAMMABLE INERTIAL DELAY ELEMENT

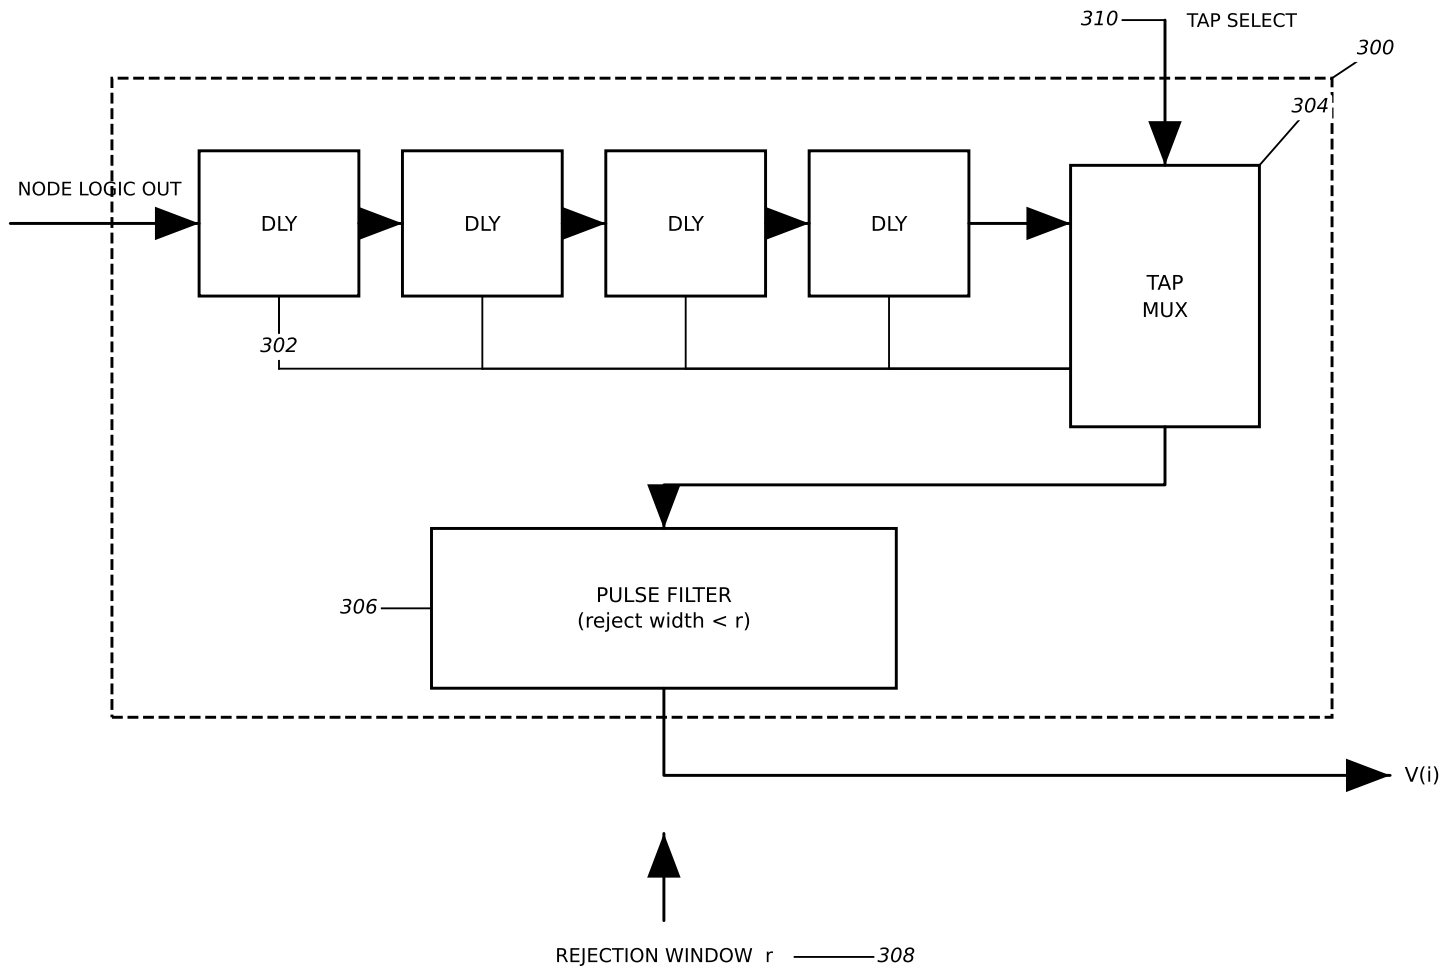

both controls driven by the annealing control (108)

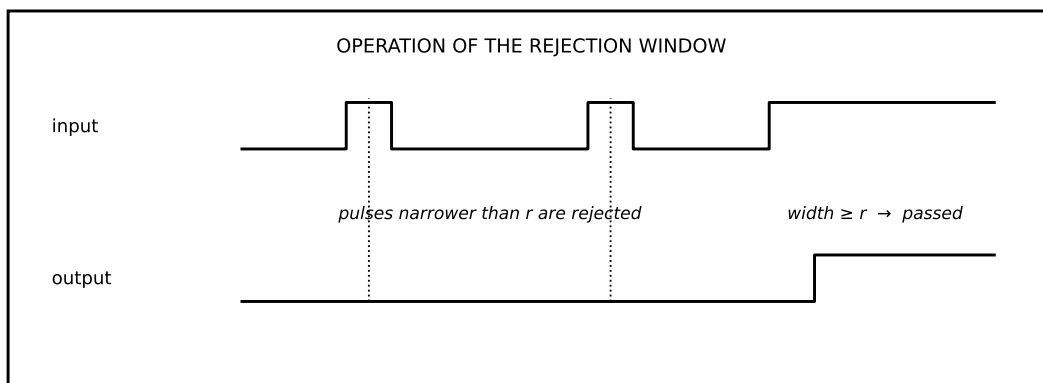

A short rejection window lets hazard pulses through, and those pulses are the perturbation source. A full-width window admits at most one settled transition per evaluation. r is therefore the annealing control variable.

FIG. 3