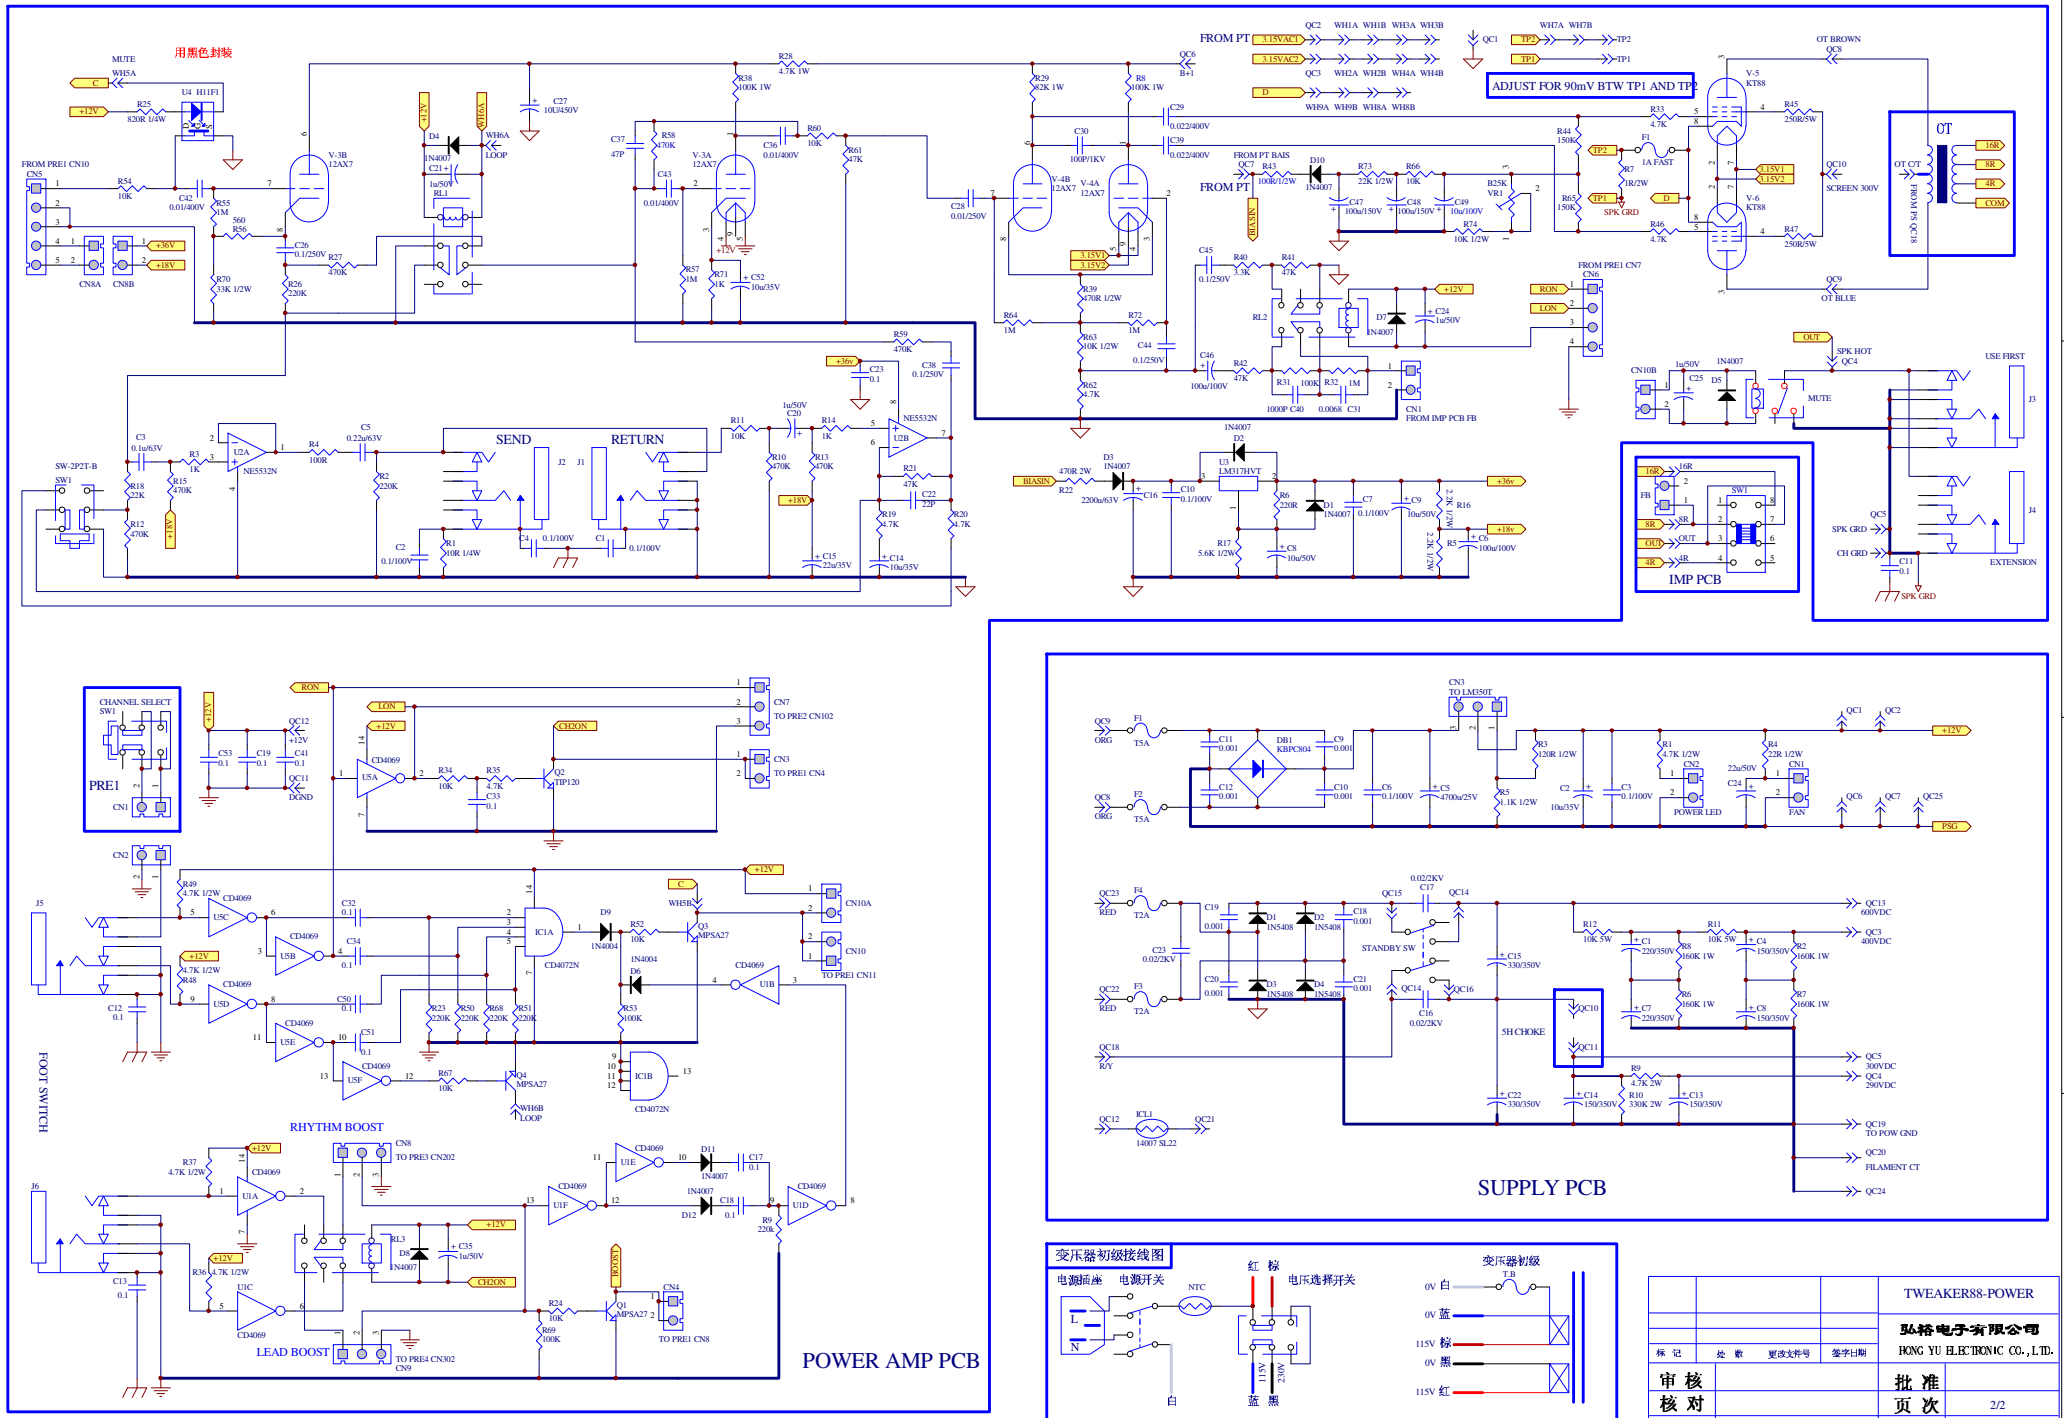

用黑色封装
MUTE
WH5A
U4 H11F1
FROM PRE1 CN10
CN5
CN8A CN8B
+36V
+18V
+12V
V-3B 12AX7
V-3A 12AX7
V-4B 12AX7
V-4A 12AX7
SEND
RETURN
J2 J1
NE5532N
SW-2P2T-B
SW1
FROM PT
3.15VAC1
3.15VAC2
D
QC1
QC2 WH1A WH1B WH3A WH3B
QC3 WH2A WH2B WH4A WH4B
WH9A WH9B WH8A WH8B
WH7A WH7B
TP2
TP1
ADJUST FOR 90mV BTW TP1 AND TP2
FROM PT BIAS
FROM PRE1 CN7
CN6
RON
LON
SPK GRD
1A FAST
OT BROWN
QC8
OT
OT CT
16R
8R
4R
COM
FROM PS CN8
QC10
SCREEN 300V
QC9
OT BLUE
V-5 KT88
V-6 KT88
SPK HOT
QC4
USE FIRST
J3
J4
EXTENSION
QC5
CH GRD
IMP PCB
CN1
FROM IMP PCB FB
BIASIN
CHANNEL SELECT
PRE1
CN1
CN7
TO PRE2 CN102
CN3
TO PRE1 CN4
CH2ON
FOOT SWITCH
RHYTHM BOOST
LEAD BOOST
CN8
TO PRE3 CN202
TO PRE4 CN302
CN9
TO PRE1 CN8
CN10A
CN10
TO PRE1 CN11
POWER AMP PCB
TO LM350T
POWER LED
FAN
PSG
STANDBY SW
5H CHOKE
QC13 600VDC
QC3 400VDC
QC5 300VDC
QC4 290VDC
QC19 TO POW GND
QC20 FILAMENT CT
QC24
SUPPLY PCB
变压器初级接线图
电源插座
电源开关
NTC
电压选择开关
红
棕
白
蓝
黑
115V
230V
变压器初级
0V 白
0V 蓝
115V 棕
0V 黑
115V 红
TWEAKER88-POWER
弘格电子有限公司
HONG YU ELECTRONIC CO.,LTD.
标记
处数
更改文件号
签字日期
审核
批准
核对
页次
2/2
设计
日期