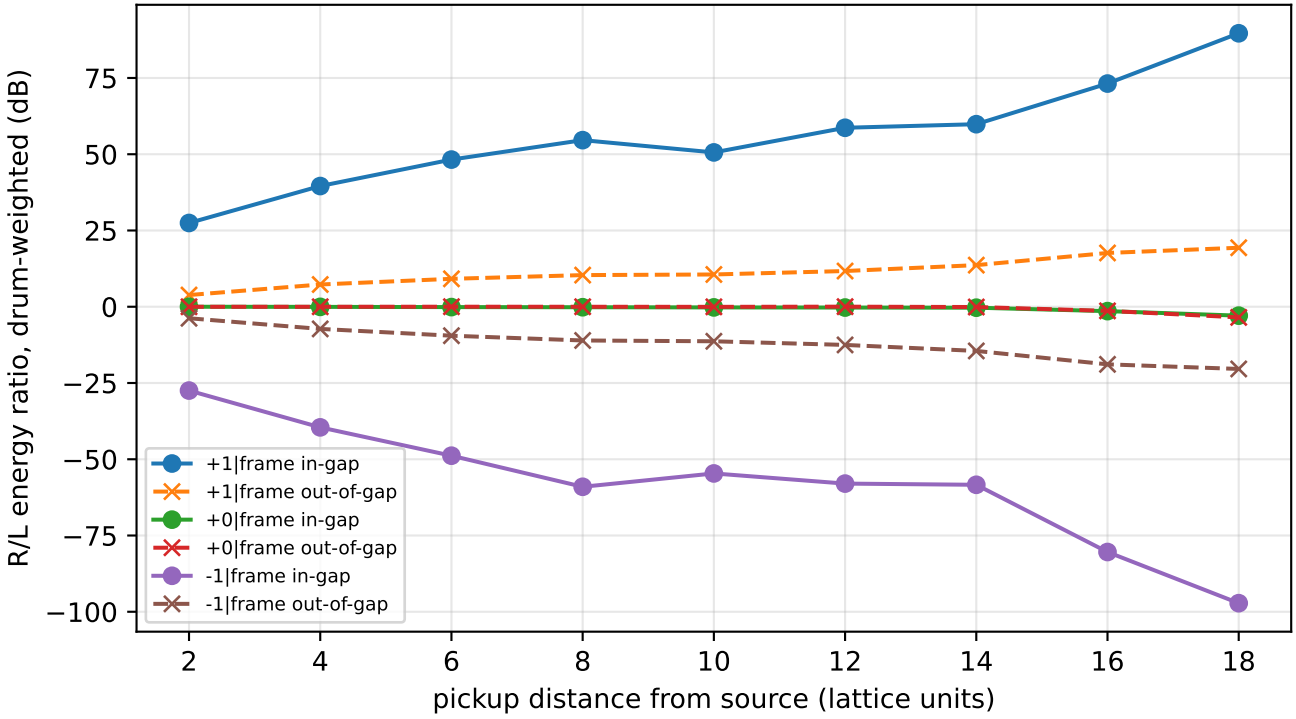
R/L energy ratio, drum-weighted (dB)
75
50
25
0
−25
−50
−75
−100
2
4
6
8
10
12
14
16
18
pickup distance from source (lattice units)
+1|frame in-gap
+1|frame out-of-gap
+0|frame in-gap
+0|frame out-of-gap
-1|frame in-gap
-1|frame out-of-gap