

1. Description


1.1. Project

Project Name	tp_v0
Board Name	32F411EDISCOVERY
Generated with:	STM32CubeMX 4.27.0
Date	02/26/2019

1.2. MCU

MCU Series	STM32F4
MCU Line	STM32F411
MCU name	STM32F411VETx
MCU Package	LQFP100
MCU Pin number	100

2. Pinout Configuration

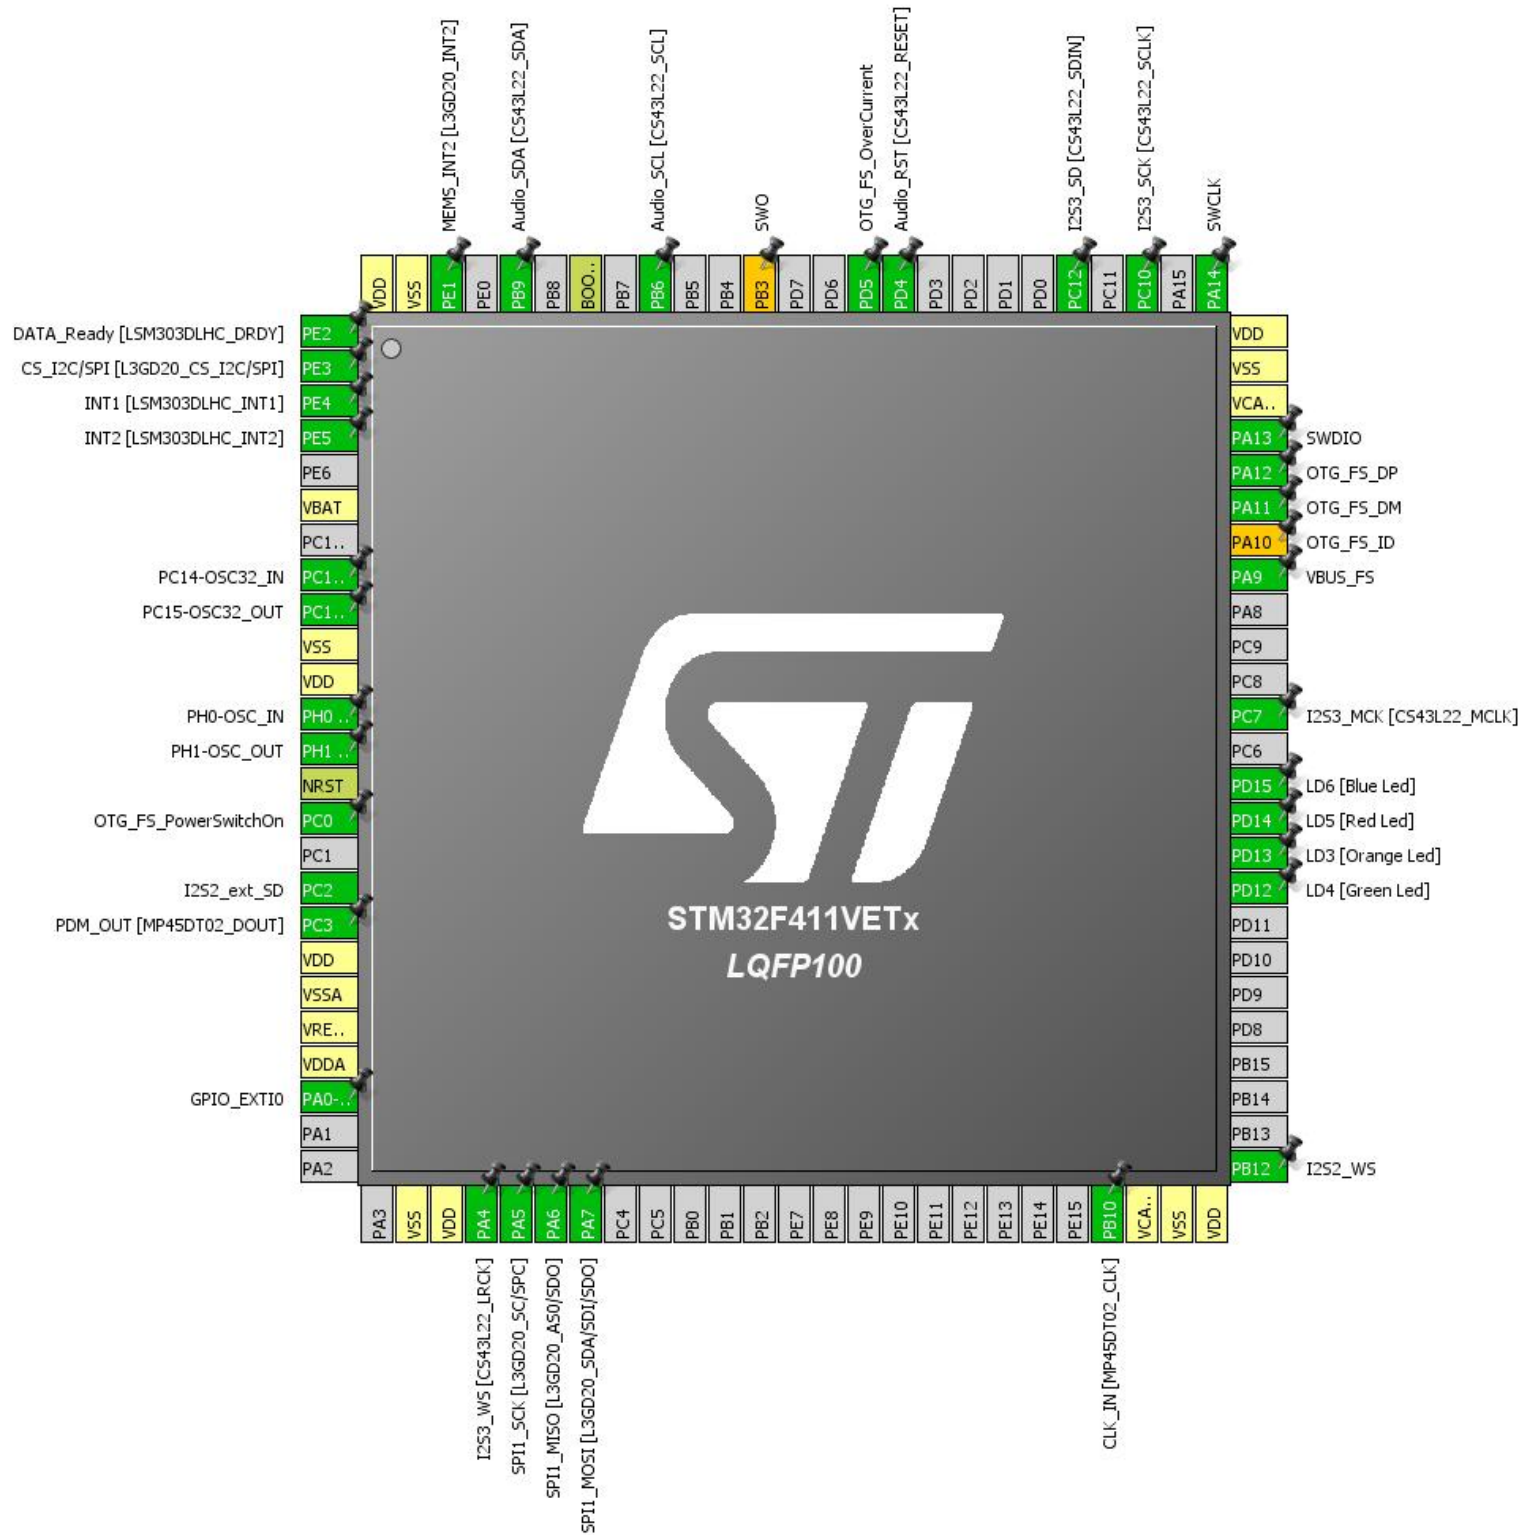

3. Pins Configuration


Pin Number LQFP100	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
1	PE2 *	I/O	GPIO_Input	DATA_Ready [LSM303DLHC_DRDY]
2	PE3 *	I/O	GPIO_Output	CS_I2C/SPI [L3GD20_CS_I2C/SPI]
3	PE4	I/O	GPIO_EXTI4	INT1 [LSM303DLHC_INT1]
4	PE5	I/O	GPIO_EXTI5	INT2 [LSM303DLHC_INT2]
6	VBAT	Power		
8	PC14-OSC32_IN	I/O	RCC_OSC32_IN	PC14-OSC32_IN
9	PC15-OSC32_OUT	I/O	RCC_OSC32_OUT	PC15-OSC32_OUT
10	VSS	Power		
11	VDD	Power		
12	PH0 - OSC_IN	I/O	RCC_OSC_IN	PH0-OSC_IN
13	PH1 - OSC_OUT	I/O	RCC_OSC_OUT	PH1-OSC_OUT
14	NRST	Reset		
15	PC0 *	I/O	GPIO_Output	OTG_FS_PowerSwitchOn
17	PC2	I/O	I2S2_ext_SD	
18	PC3	I/O	I2S2_SD	PDM_OUT [MP45DT02_DOUT]
19	VDD	Power		
20	VSSA	Power		
21	VREF+	Power		
22	VDDA	Power		
23	PA0-WKUP	I/O	GPIO_EXTI0	
27	VSS	Power		
28	VDD	Power		
29	PA4	I/O	I2S3_WS	I2S3_WS [CS43L22_LRCK]
30	PA5	I/O	SPI1_SCK	SPI1_SCK [L3GD20_SC/SPC]
31	PA6	I/O	SPI1_MISO	SPI1_MISO [L3GD20_AS0/SDO]
32	PA7	I/O	SPI1_MOSI	SPI1_MOSI [L3GD20_SDA/SDI/SDO]
47	PB10	I/O	I2S2_CK	CLK_IN [MP45DT02_CLK]
48	VCAP1	Power		
49	VSS	Power		
50	VDD	Power		
51	PB12	I/O	I2S2_WS	

Pin Number LQFP100	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
59	PD12 *	I/O	GPIO_Output	LD4 [Green Led]
60	PD13 *	I/O	GPIO_Output	LD3 [Orange Led]
61	PD14 *	I/O	GPIO_Output	LD5 [Red Led]
62	PD15 *	I/O	GPIO_Output	LD6 [Blue Led]
64	PC7	I/O	I2S3_MCK	I2S3_MCK [CS43L22_MCLK]
68	PA9	I/O	USB_OTG_FS_VBUS	VBUS_FS
69	PA10 **	I/O	USB_OTG_FS_ID	OTG_FS_ID
70	PA11	I/O	USB_OTG_FS_DM	OTG_FS_DM
71	PA12	I/O	USB_OTG_FS_DP	OTG_FS_DP
72	PA13	I/O	SYS_JTMS-SWDIO	SWDIO
73	VCAP2	Power		
74	VSS	Power		
75	VDD	Power		
76	PA14	I/O	SYS_JTCK-SWCLK	SWCLK
78	PC10	I/O	I2S3_CK	I2S3_SCK [CS43L22_SCLK]
80	PC12	I/O	I2S3_SD	I2S3_SD [CS43L22_SDIN]
85	PD4 *	I/O	GPIO_Output	Audio_RST [CS43L22_RESET]
86	PD5 *	I/O	GPIO_Input	OTG_FS_OverCurrent
89	PB3 **	I/O	SYS_JTDO-SWO	SWO
92	PB6	I/O	I2C1_SCL	Audio_SCL [CS43L22_SCL]
94	BOOT0	Boot		
96	PB9	I/O	I2C1_SDA	Audio_SDA [CS43L22_SDA]
98	PE1	I/O	GPIO_EXTI1	MEMS_INT2 [L3GD20_INT2]
99	VSS	Power		
100	VDD	Power		

* The pin is affected with an I/O function

** The pin is affected with a peripheral function but no peripheral mode is activated

4. Clock Tree Configuration

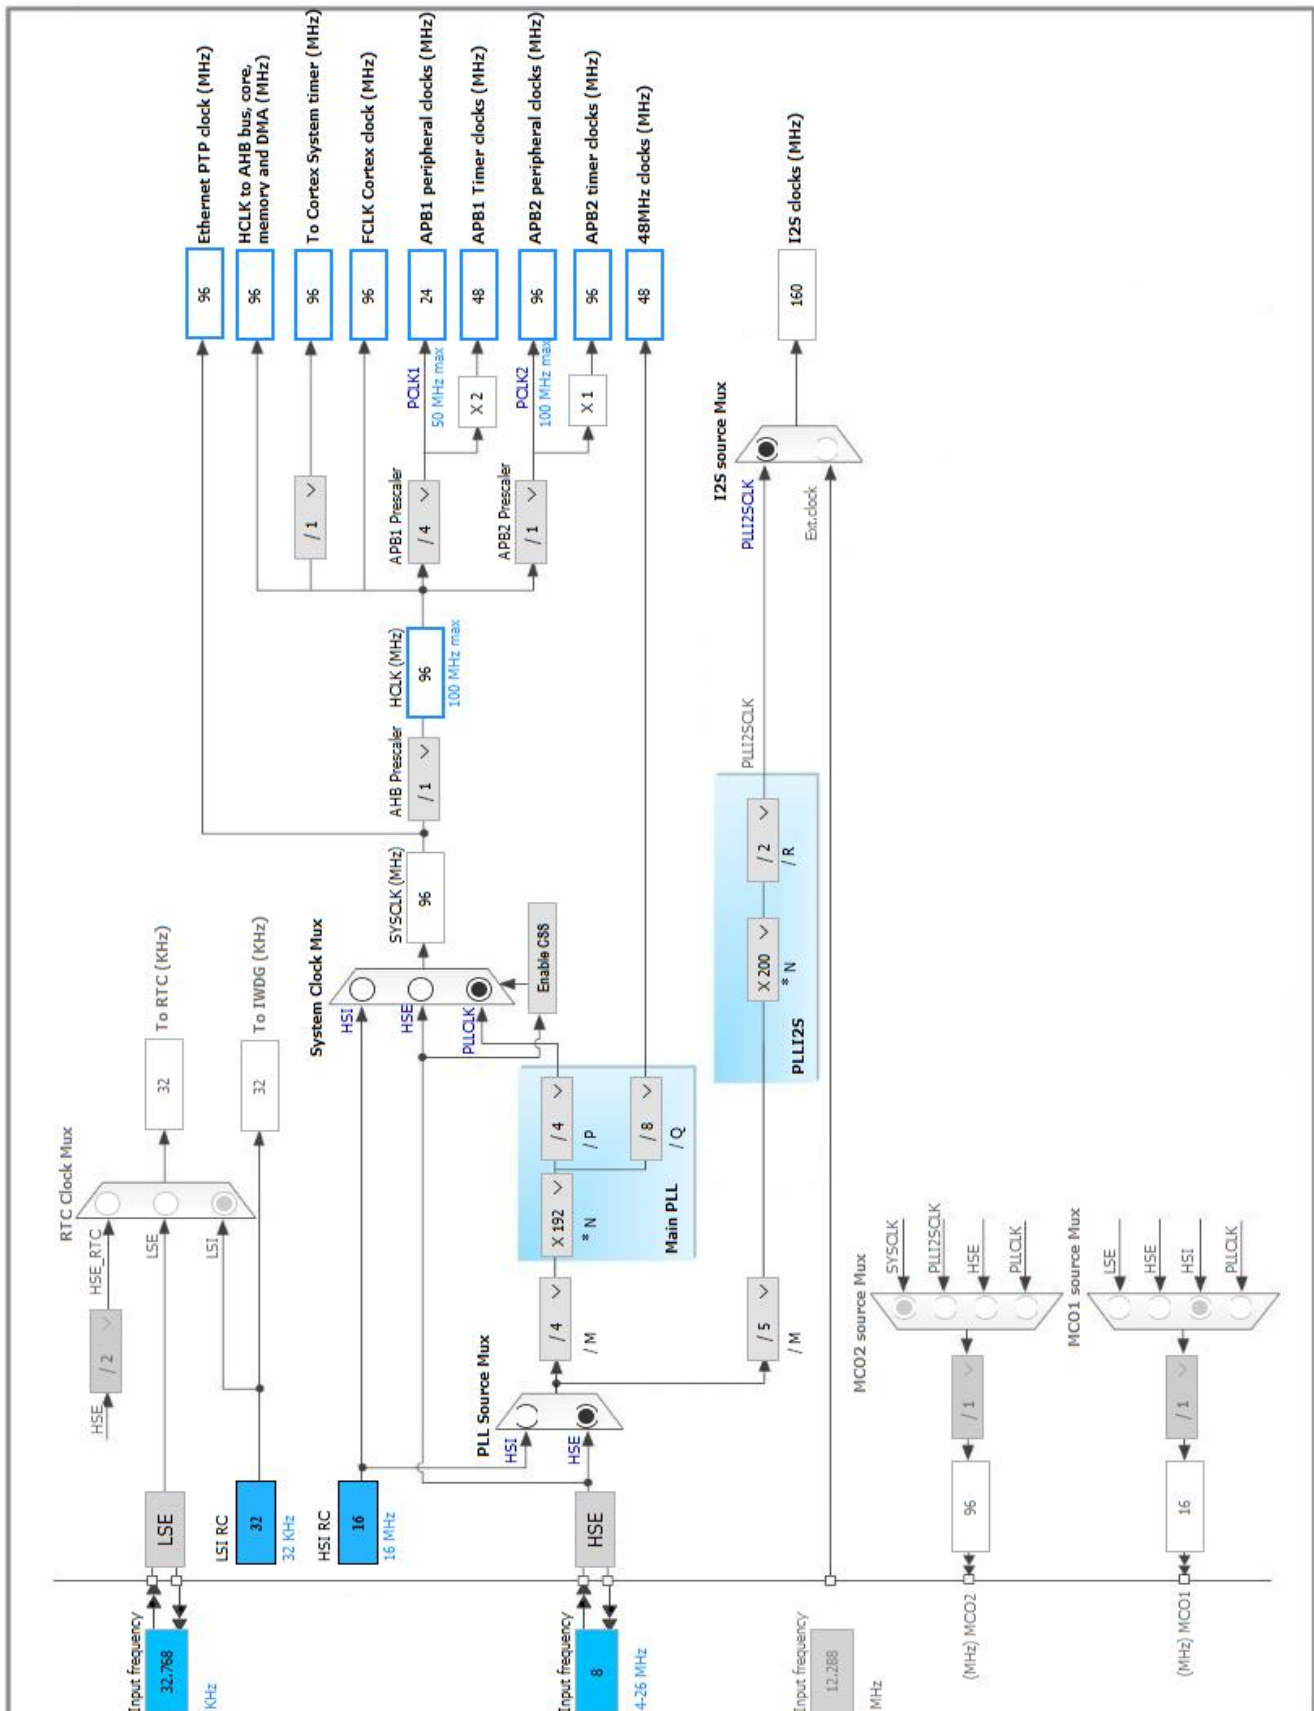

5. IPs and Middleware Configuration

5.1. I2C1

I2C: I2C

5.1.1. Parameter Settings:

Master Features:

I2C Speed Mode	Standard Mode
I2C Clock Speed (Hz)	100000

Slave Features:

Clock No Stretch Mode	Disabled
Primary Address Length selection	7-bit
Dual Address Acknowledged	Disabled
Primary slave address	0
General Call address detection	Disabled

5.2. I2S2

Mode: Full-Duplex Master

5.2.1. Parameter Settings:

Generic Parameters:

Transmission Mode	Mode Master Transmit
Communication Standard	I2S Philips
Data and Frame Format	16 Bits Data on 16 Bits Frame
Selected Audio Frequency	96 KHz *
Real Audio Frequency	96.153 KHz *
Error between Selected and Real	0.15 % *

Clock Parameters:

Clock Source	I2S PLL Clock
Clock Polarity	Low

5.3. I2S3

Mode: Half-Duplex Master

mode: Master Clock Output

5.3.1. Parameter Settings:

Generic Parameters:

Transmission Mode	Mode Master Transmit
Communication Standard	I2S Philips
Data and Frame Format	16 Bits Data on 16 Bits Frame
Selected Audio Frequency	96 KHz *
Real Audio Frequency	89.285 KHz *
Error between Selected and Real	-6.99 % *

Clock Parameters:

Clock Source	I2S PLL Clock
Clock Polarity	Low

5.4. RCC

High Speed Clock (HSE): Crystal/Ceramic Resonator

Low Speed Clock (LSE) : Crystal/Ceramic Resonator

5.4.1. Parameter Settings:

System Parameters:

VDD voltage (V)	3.3
Instruction Cache	Enabled
Prefetch Buffer	Enabled
Data Cache	Enabled
Flash Latency(WS)	3 WS (4 CPU cycle)

RCC Parameters:

HSI Calibration Value	16
TIM Prescaler Selection	Disabled
HSE Startup Timeout Value (ms)	100
LSE Startup Timeout Value (ms)	5000

Power Parameters:

Power Regulator Voltage Scale	Power Regulator Voltage Scale 1
-------------------------------	---------------------------------

5.5. SPI1

Mode: Full-Duplex Master

5.5.1. Parameter Settings:

Basic Parameters:

Frame Format	Motorola
Data Size	8 Bits
First Bit	MSB First

Clock Parameters:

Prescaler (for Baud Rate)	2
Baud Rate	48.0 MBits/s *
Clock Polarity (CPOL)	Low
Clock Phase (CPHA)	1 Edge

Advanced Parameters:

CRC Calculation	Disabled
NSS Signal Type	Software

5.6. SYS

Debug: Serial Wire

Timebase Source: TIM10

5.7. USB_OTG_FS

Mode: Device_Only

mode: Activate_VBUS

5.7.1. Parameter Settings:

Speed	Device Full Speed 12MBit/s
Endpoint 0 Max Packet size	64 Bytes
Enable internal IP DMA	Disabled
Low power	Disabled
Link Power Management	Disabled
VBUS sensing	Enabled
Signal start of frame	Disabled

5.8. FREERTOS

mode: Enabled

5.8.1. Config parameters:

Versions:

FreeRTOS version	9.0.0
CMSIS-RTOS version	1.02

Kernel settings:

USE_PREEMPTION	Enabled
CPU_CLOCK_HZ	SystemCoreClock
TICK_RATE_HZ	1000
MAX_PRIORITIES	7
MINIMAL_STACK_SIZE	128
MAX_TASK_NAME_LEN	16
USE_16_BIT_TICKS	Disabled
IDLE_SHOULD_YIELD	Enabled
USE_MUTEXES	Enabled
USE_RECURSIVE_MUTEXES	Disabled
USE_COUNTING_SEMAPHORES	Disabled
QUEUE_REGISTRY_SIZE	8
USE_APPLICATION_TASK_TAG	Disabled
ENABLE_BACKWARD_COMPATIBILITY	Enabled
USE_PORT_OPTIMISED_TASK_SELECTION	Enabled
USE_TICKLESS_IDLE	Disabled
USE_TASK_NOTIFICATIONS	Enabled

Memory management settings:

Memory Allocation	Dynamic
TOTAL_HEAP_SIZE	15360
Memory Management scheme	heap_4

Hook function related definitions:

USE_IDLE_HOOK	Disabled
USE_TICK_HOOK	Disabled
USE_MALLOC_FAILED_HOOK	Disabled
USE_DAEMON_TASK_STARTUP_HOOK	Disabled
CHECK_FOR_STACK_OVERFLOW	Disabled

Run time and task stats gathering related definitions:

GENERATE_RUN_TIME_STATS	Disabled
USE_TRACE_FACILITY	Disabled
USE_STATS_FORMATTING_FUNCTIONS	Disabled

Co-routine related definitions:

USE_CO_ROUTINES	Disabled
MAX_CO_ROUTINE_PRIORITIES	2

Software timer definitions:

USE_TIMERS	Disabled
------------	----------

Interrupt nesting behaviour configuration:

LIBRARY_LOWEST_INTERRUPT_PRIORITY	15
LIBRARY_MAX_SYSCALL_INTERRUPT_PRIORITY	5

5.8.2. Include parameters:

Include definitions:

vTaskPrioritySet	Enabled
uxTaskPriorityGet	Enabled
vTaskDelete	Enabled
vTaskCleanUpResources	Disabled
vTaskSuspend	Enabled
vTaskDelayUntil	Disabled
vTaskDelay	Enabled
xTaskGetSchedulerState	Enabled
xTaskResumeFromISR	Enabled
xQueueGetMutexHolder	Disabled
xSemaphoreGetMutexHolder	Disabled
pcTaskGetTaskName	Disabled
uxTaskGetStackHighWaterMark	Disabled
xTaskGetCurrentTaskHandle	Disabled
eTaskGetState	Disabled
xEventGroupSetBitFromISR	Disabled
xTimerPendFunctionCall	Disabled
xTaskAbortDelay	Disabled
xTaskGetHandle	Disabled

* User modified value

6. System Configuration

6.1. GPIO configuration

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
I2C1	PB6	I2C1_SCL	Alternate Function Open Drain	Pull-up	Low	Audio_SCL [CS43L22_SCL]
	PB9	I2C1_SDA	Alternate Function Open Drain	Pull-up	Low	Audio_SDA [CS43L22_SDA]
I2S2	PC2	I2S2_ext_SD	Alternate Function Push Pull	No pull-up and no pull-down	Low	
	PC3	I2S2_SD	Alternate Function Push Pull	No pull-up and no pull-down	Low	PDM_OUT [MP45DT02_DOUT]
	PB10	I2S2_CK	Alternate Function Push Pull	No pull-up and no pull-down	Low	CLK_IN [MP45DT02_CLK]
	PB12	I2S2_WS	Alternate Function Push Pull	No pull-up and no pull-down	Low	
I2S3	PA4	I2S3_WS	Alternate Function Push Pull	No pull-up and no pull-down	Low	I2S3_WS [CS43L22_LRCK]
	PC7	I2S3_MCK	Alternate Function Push Pull	No pull-up and no pull-down	Low	I2S3_MCK [CS43L22_MCLK]
	PC10	I2S3_CK	Alternate Function Push Pull	No pull-up and no pull-down	Low	I2S3_SCK [CS43L22_SCLK]
	PC12	I2S3_SD	Alternate Function Push Pull	No pull-up and no pull-down	Low	I2S3_SD [CS43L22_SDIN]
RCC	PC14-OSC32_IN	RCC_OSC32_IN	n/a	n/a	n/a	PC14-OSC32_IN
	PC15-OSC32_OUT	RCC_OSC32_OUT	n/a	n/a	n/a	PC15-OSC32_OUT
	PH0 - OSC_IN	RCC_OSC_IN	n/a	n/a	n/a	PH0-OSC_IN
	PH1 - OSC_OUT	RCC_OSC_OUT	n/a	n/a	n/a	PH1-OSC_OUT
SPI1	PA5	SPI1_SCK	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	SPI1_SCK [L3GD20_SC/SPC]
	PA6	SPI1_MISO	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	SPI1_MISO [L3GD20_AS0/SDO]
	PA7	SPI1_MOSI	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	SPI1_MOSI [L3GD20_SDA/SDI/SDO]
SYS	PA13	SYS_JTMS-SWDIO	n/a	n/a	n/a	SWDIO
	PA14	SYS_JTCK-SWCLK	n/a	n/a	n/a	SWCLK
USB_OTG_FS	PA9	USB_OTG_FS_VBUS	Input mode	No pull-up and no pull-down	n/a	VBUS_FS
	PA11	USB_OTG_FS_	Alternate Function Push Pull	No pull-up and no pull-down	Very High	OTG_FS_DM

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
		DM			*	
	PA12	USB_OTG_FS_DP	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	OTG_FS_DP
Single Mapped Signals	PA10	USB_OTG_FS_ID	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	OTG_FS_ID
	PB3	SYS_JTDO-SWO	n/a	n/a	n/a	SWO
GPIO	PE2	GPIO_Input	Input mode	No pull-up and no pull-down	n/a	DATA_Ready [LSM303DLHC_DRDY]
	PE3	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	CS_I2C/SPI [L3GD20_CS_I2C/SPI]
	PE4	GPIO_EXTI4	External Event Mode with Rising edge trigger detection *	No pull-up and no pull-down	n/a	INT1 [LSM303DLHC_INT1]
	PE5	GPIO_EXTI5	External Event Mode with Rising edge trigger detection *	No pull-up and no pull-down	n/a	INT2 [LSM303DLHC_INT2]
	PC0	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	OTG_FS_PowerSwitchOn
	PA0-WKUP	GPIO_EXTI0	External Event Mode with Rising edge trigger detection *	No pull-up and no pull-down	n/a	
	PD12	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	LD4 [Green Led]
	PD13	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	LD3 [Orange Led]
	PD14	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	LD5 [Red Led]
	PD15	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	LD6 [Blue Led]
	PD4	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	Audio_RST [CS43L22_RESET]
	PD5	GPIO_Input	Input mode	No pull-up and no pull-down	n/a	OTG_FS_OverCurrent
	PE1	GPIO_EXTI1	External Event Mode with Rising edge trigger detection *	No pull-up and no pull-down	n/a	MEMS_INT2 [L3GD20_INT2]

6.2. DMA configuration

nothing configured in DMA service

6.3. NVIC configuration

Interrupt Table	Enable	Preenmption Priority	SubPriority
Non maskable interrupt	true	0	0
Hard fault interrupt	true	0	0
Memory management fault	true	0	0
Pre-fetch fault, memory access fault	true	0	0
Undefined instruction or illegal state	true	0	0
System service call via SWI instruction	true	0	0
Debug monitor	true	0	0
Pendable request for system service	true	15	0
System tick timer	true	15	0
TIM1 update interrupt and TIM10 global interrupt	true	0	0
USB On The Go FS global interrupt	true	5	0
PVD interrupt through EXTI line 16	unused		
Flash global interrupt	unused		
RCC global interrupt	unused		
I2C1 event interrupt	unused		
I2C1 error interrupt	unused		
SPI1 global interrupt	unused		
SPI2 global interrupt	unused		
SPI3 global interrupt	unused		
FPU global interrupt	unused		

* User modified value

7. Power Consumption Calculator report

7.1. Microcontroller Selection

Series	STM32F4
Line	STM32F411
MCU	STM32F411VETx
Datasheet	026289_Rev6

7.2. Parameter Selection

Temperature	25
Vdd	null

8. Software Project

8.1. Project Settings

Name	Value
Project Name	tp_v0
Project Folder	C:\Users\Ana Almeida\Desktop\MEEC_18\SistemasEmbebidos\tp_v0
Toolchain / IDE	TrueSTUDIO
Firmware Package Name and Version	STM32Cube FW_F4 V1.21.0

8.2. Code Generation Settings

Name	Value
STM32Cube Firmware Library Package	Copy only the necessary library files
Generate peripheral initialization as a pair of '.c/.h' files	Yes
Backup previously generated files when re-generating	Yes
Delete previously generated files when not re-generated	Yes
Set all free pins as analog (to optimize the power consumption)	No

9. Software Pack Report