
台中市大雅區雅潭路三段400巷117號
TEL/04-2569-2078 FAX/04-2568-9581
NO177, LN.400, SEC.3, YATAN RD, TAYA DIST, TAICHUNG CITY, TAIWAN, R.O.C.
meta.ruby@msa.hinet.net

HELIOTEC

6”×108” VARIABLE-SPEED OSCILLATING EDGE SANDER

High Power · High Precision · Multi-Angle Sanding Versatile Performance in One Machine

Equipped with a 3 HP high-performance motor and digital variable-frequency drive (VFD) speed control, this machine provides a wide speed range of 300–3600 RPM. The speed can be easily adjusted to suit different materials and sanding applications, delivering smooth operation, high torque, and precise sanding performance.

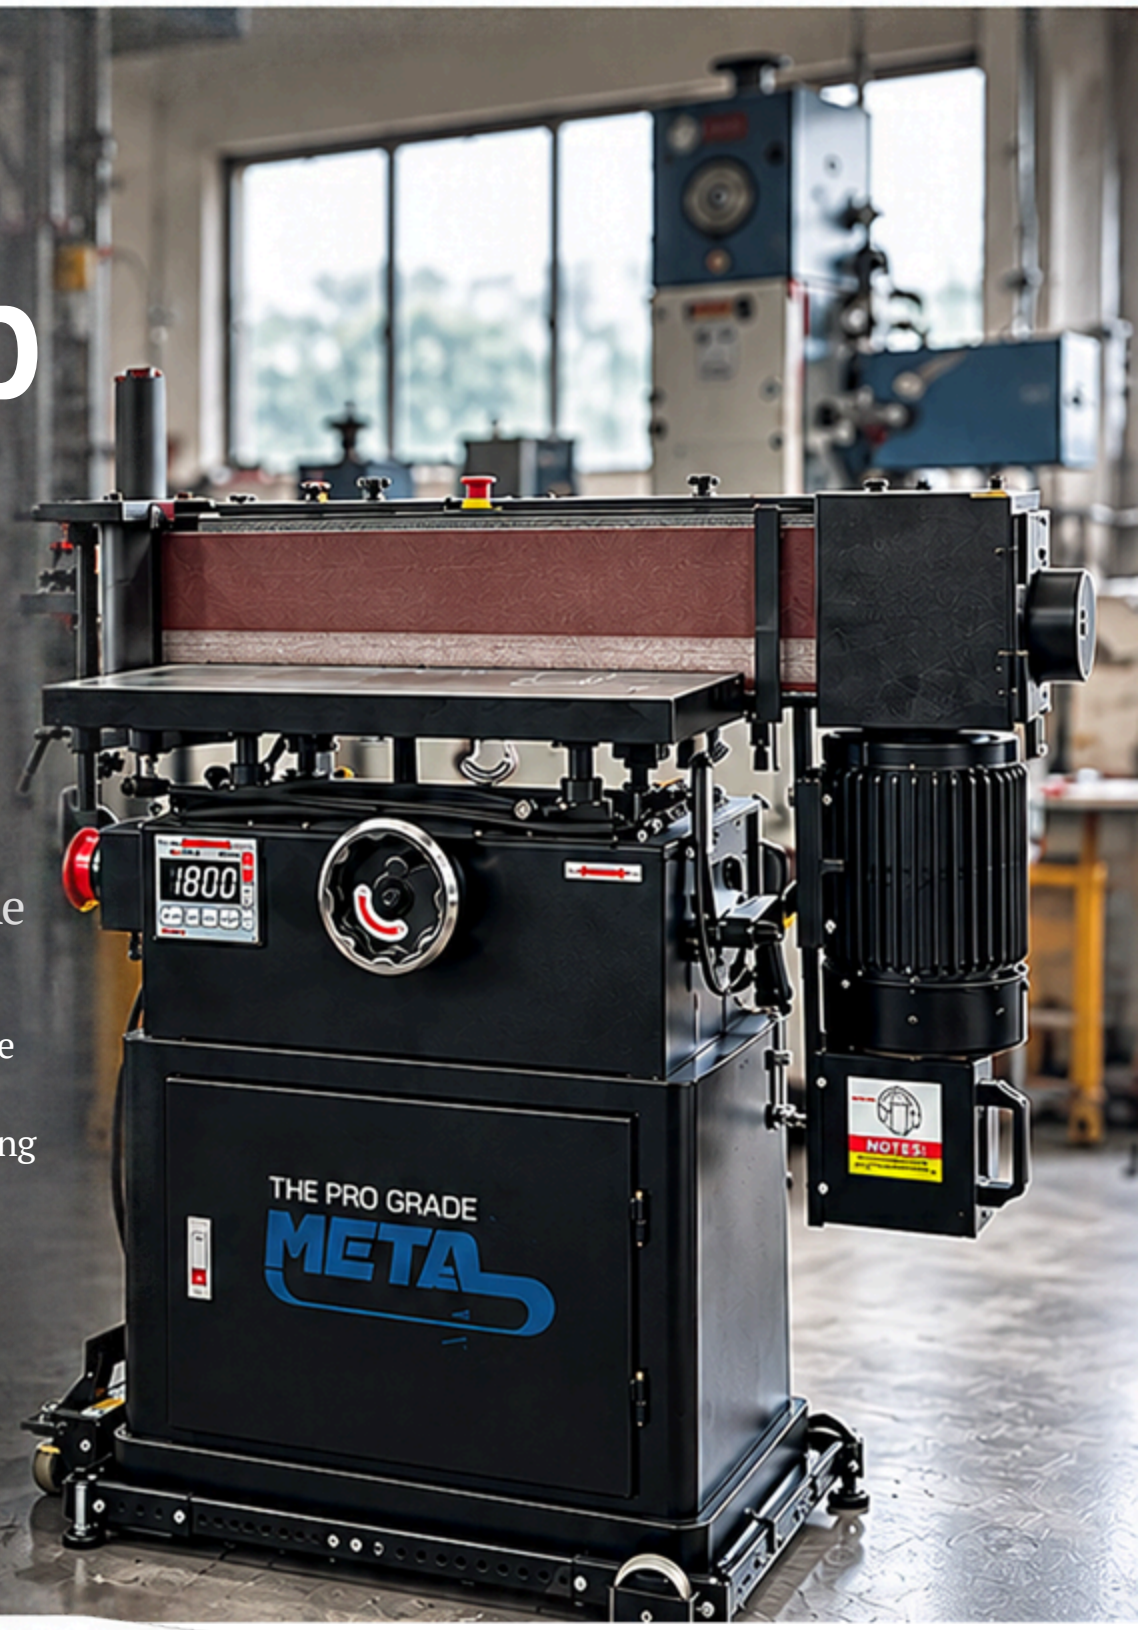

HIGH POWER

HIGH PRECISION

MULTI-ANGLE SANDING

VERSATILE PERFORMANCE

SPECIFICATIONS

Motor	
Speed Range	300 – 3600 RPM
Table Tilting	0° – 90°
Sanding Belt Size	6” × 108”
Speed Control	VFD Variable-Speed Control

DETAIL VIEWS




DIGITAL SPEED DISPLAY & VFD CONTROL



0° – 90° TABLE TILTING



OSCILLATING SANDING BELT

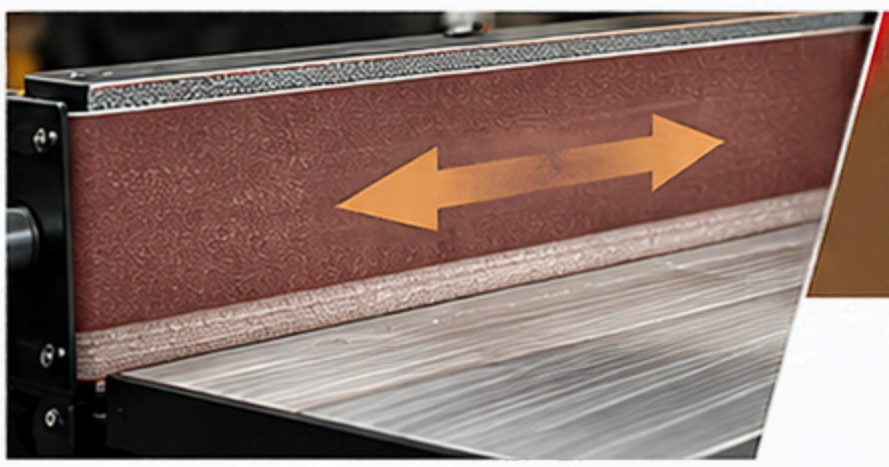

Oscillating Sanding Belt

Oscillating belt movement reduces heat, prevents loading, and provides a finer, more uniform finish.