Automated Vacuum Switch

Automatic ON/OFF for Vacuum Equipment



Automatic Start
Main equipment ON, vacuum equipment automatically ON.

Improve Efficiency
Saves time and improves productivity

Cleaner Work Environment
Reduces dust and noise

UL/CAS Certified Socket
Safe and reliable

Product Introduction

The Automated Vacuum Switch automatically controls the vacuum equipment. When the main machine starts, the vacuum equipment turns on automatically. After the main machine stops, the vacuum equipment will automatically turn off with a delay of approximately 6 to 8 seconds. It effectively reduces dust, lowers noise levels, and creates a cleaner and safer working environment. It is the ideal accessory for woodworking, machining, and repair applications.



94V-0 ABS	15A	UL / CAS	14AWG
Flame Retardant Housing	Overload Protection	Certified Socket	Power Cord
Enhanced Safety	Safer to Use	High Quality and Reliable	High-Standard Cable Stable Performance

Applications

Suitable for various tools and equipment with dust extraction needs.


Miter Saw


Circular Saw


Sander

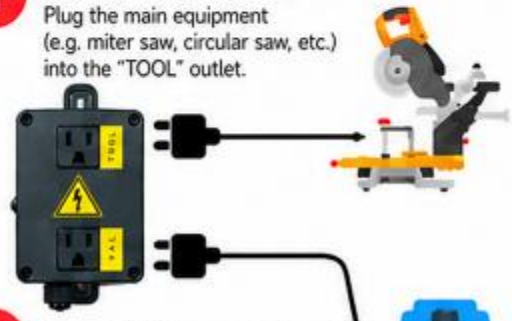

Work Light


Vacuum Cleaner


Dust Collector

How to Use

1 Connect the Main Equipment
Plug the main equipment (e.g. miter saw, circular saw, etc.) into the "TOOL" outlet.



2 Connect the Vacuum Equipment
Plug the vacuum equipment (e.g. vacuum cleaner, dust collector, etc.) into the "VAC" outlet.

Operation Flow

Start Up

1. Turn on the main equipment manually.
2. The vacuum equipment will turn on automatically.



Shut Down

1. Turn off the main equipment manually.
2. After approximately 6 to 8 seconds, the vacuum equipment will automatically turn off.



Dimensions



Specification

Rated Voltage	110V~ 60Hz
Maximum Current	15A
Socket Specification	UL / CAS Certified Socket
Housing Material	94V-0 ABS (Flame Retardant)
Power Cord	14AWG × 100 cm (39.4 in)
Turn-off Delay Time	Approx. 6 – 8 seconds
Product Dimensions	170 (L) × 115 (W) × 80 (H) mm (6.7 × 4.5 × 3.1 in)

Safety Precautions

- Use with 110V electrical environment only.
- Do not exceed 15A total load.
- Keep away from water, moisture and high-humidity environments, and maintain dryness.

This catalog is for marketing purposes only. We reserve the right to make design changes without prior notice.