
HELIOTEC
台中市大雅區雅潭路三段400巷117號
TEL/04-2569-2078 FAX/04-2568-9581
NO177, LN.400, SEC.3, YATAN RD, TAYA DIST, TAICHUNG CITY, TAIWAN, R.O.C.
meta.ruby@msa.hinet.net

6”×108” VARIABLE-SPEED OSCILLATING EDGE SANDER

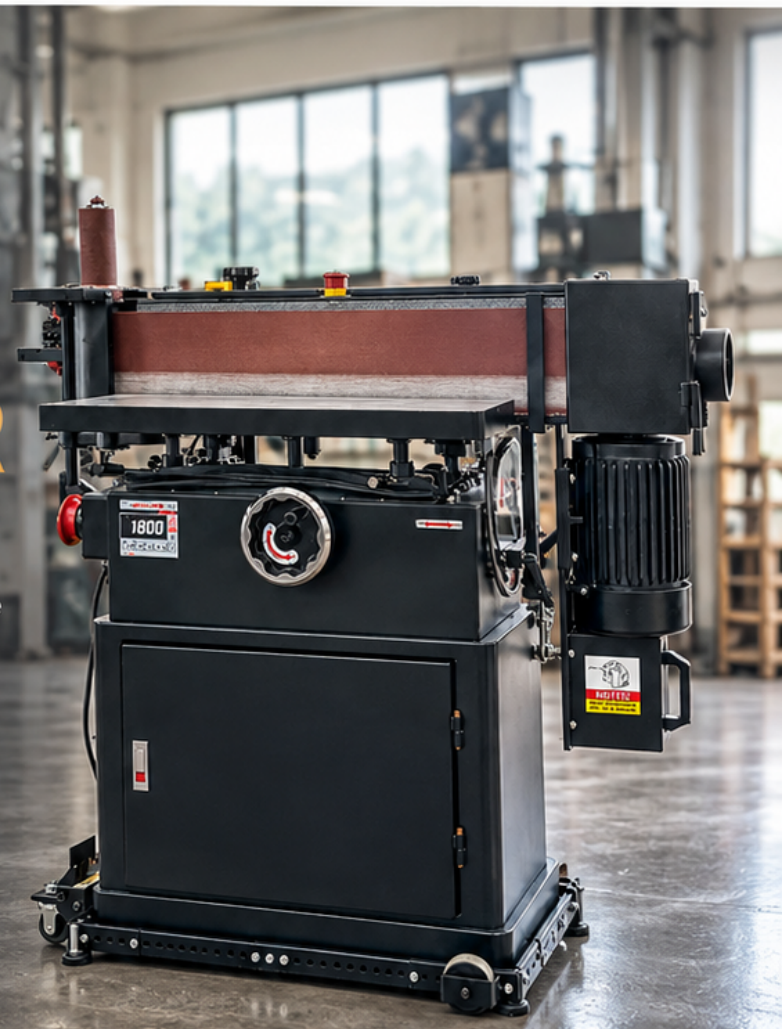

High Power • High Precision • Multi-Angle Sanding Versatile Performance in One Machine

Equipped with a 3 HP high-performance motor and digital variable-frequency drive (VFD) speed control, this machine provides a wide speed range of 300–3600 RPM. The speed can be easily adjusted to suit different materials and sanding applications, delivering smooth operation, high torque, and precise sanding performance.

HIGH POWER | HIGH PRECISION | MULTI-ANGLE SANDING | VERSATILE PERFORMANCE

SPECIFICATIONS

Motor	3 HP
Speed Range	300 – 3600 RPM
Table Tilting	0° – 90°
Sanding Belt Size	6” × 108”
Speed Control	VFD Variable-Speed Control


DETAIL VIEWS



DIGITAL SPEED DISPLAY & VFD CONTROL


0° – 90° TABLE TILTING


OSCILLATING SANDING BELT

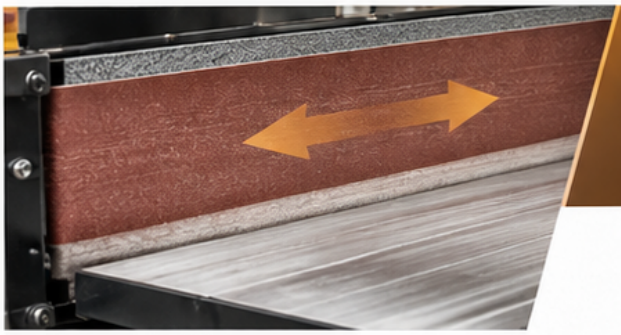

Oscillating Sanding Belt

Oscillating belt movement reduces heat, prevents loading, and provides a finer, more uniform finish.