

mantiV DRONE PARACHUTE




Flyfire.




Adapt to the DJI Matrice series.




New processor

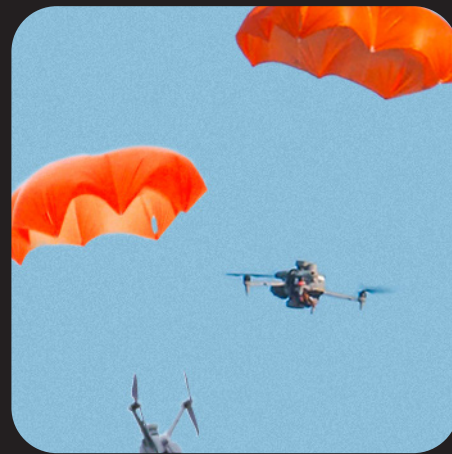

1.1 m² canopy area

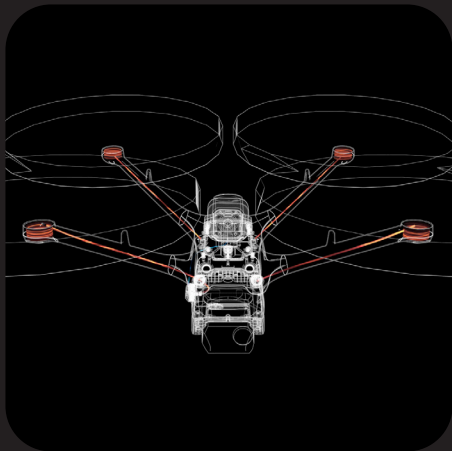

FTS propeller stop (Manti 4 Dock)

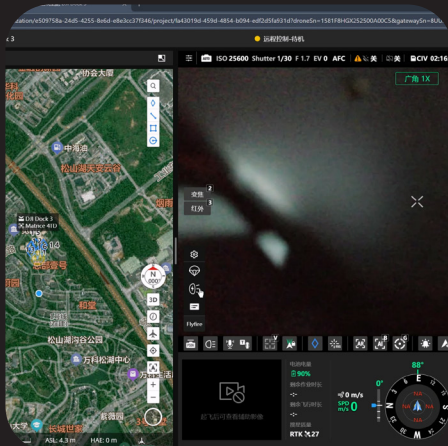

Pilot 2/FlightHub-2 Control



Red and blue flashing lights (Manti 4 Dock)

mantiV

The Manti 4 series parachute is compatible with DJI Matrice 4, Mavic series, Phantom series, and Matrice 4D/4TD drones equipped with DJI Dock 3. It is divided into different models according to the aircraft type: **Manti4** | **Manti 4Dock Basic Edition(No Lights)** | **Manti 4Dock Emergency Light Edition**. The new processor doubles the computing speed, and the full-blooded industry-grade APS 3.0 parachute deployment algorithm has a quick reaction time of only 500ms. The airport version adds new functions such as FTS propeller stop and high-brightness strobe lights, which help with safe inspections. The Manti 4 series is the solid foundation for Firefly Technology to lead the drone parachute industry.



Manti 4Dock Emergency Light Edition | **Manti 4Dock Basic Edition(No Lights)** | **Manti4**


Exclusive adaptation

The Manti 4 series parachute is applied to industry drones such as **Matrice 4** and **Matrice 4D/4TD** for the first time, marking another significant upgrade of the Manti series parachute. The software of the two models has undergone hundreds and thousands of parachute deployment tests and software false trigger detections, and has eventually become a reliable partner for your safe flight.



Dual - sensor detection of flight attitude

The Manti 4 uses a combination of data from an accelerometer and a barometric pressure sensor to determine flight attitude, which offers more precise identification and higher safety redundancy. Combined with the forward parachute deployment algorithm, it eliminates the risk of propeller entanglement.

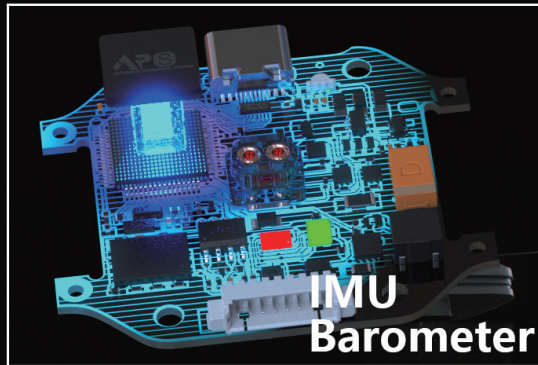


Forward parachute deployment algorithm | 500ms response speed 5.5m/s descent speed

After the drone enters the alert mode, Manti's sensors monitor the drone's flight attitude in real time. The APS system identifies the attitude 300 times per second and stores the flight log. In the event of a dangerous situation, it deploys the parachute forward at the right moment. The 1.1 m^2 canopy area provides air resistance, and the three layers of special coating reduce the canopy's air permeability, resulting in a forced landing speed of only 5.5 m/s, effectively reducing the impact kinetic energy and protecting the safety of people and property on the ground.




Significant chip upgrade

The processor speed has tripled compared to the previous generation, offering more powerful and efficient data processing capabilities. At the same time, it has lower power consumption and heat generation, enabling the APS3.0 system to run more smoothly and stably, thereby enhancing flight safety.

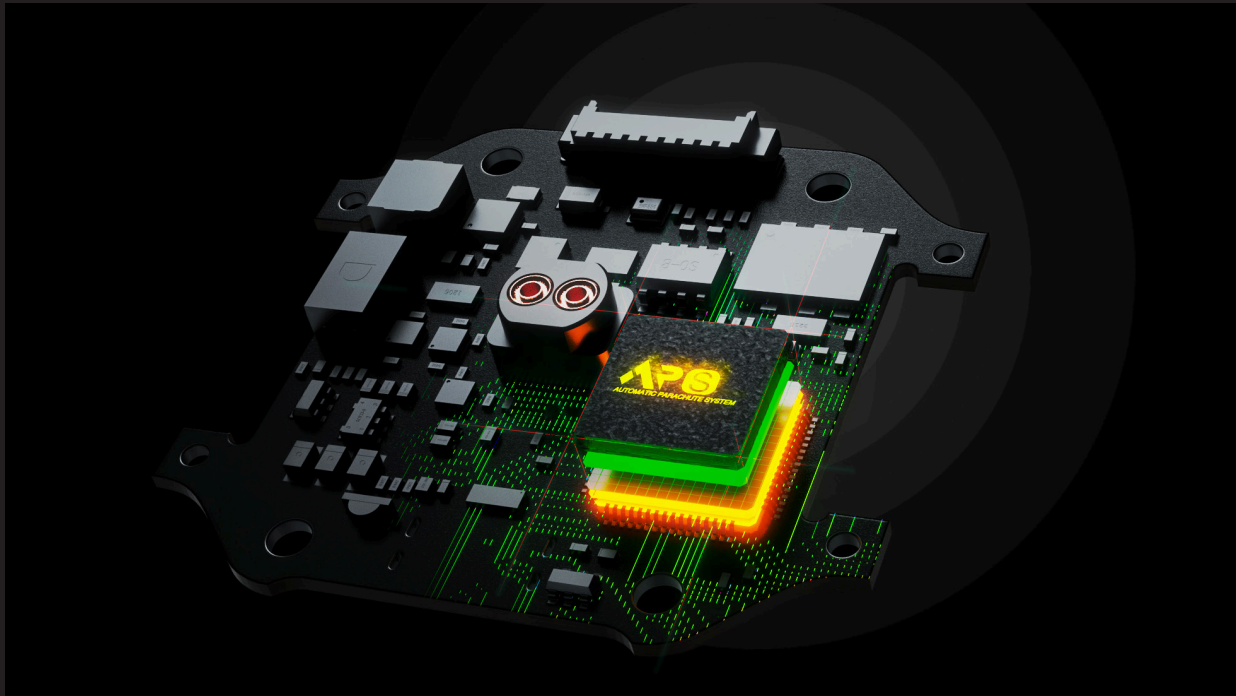


APS 3.0 parachute deployment algorithm

Flyfire proprietary parachute deployment algorithm integrates data from the IMU and the accelerometer to determine the optimal timing for parachute deployment. It can interact with the drone via an interface to obtain flight control data. The algorithm has been trained using data from thousands of incidents. Combined with the unique forward parachute deployment algorithm, it reduces the risk of propeller entanglement during parachute deployment, ensuring flight safety.

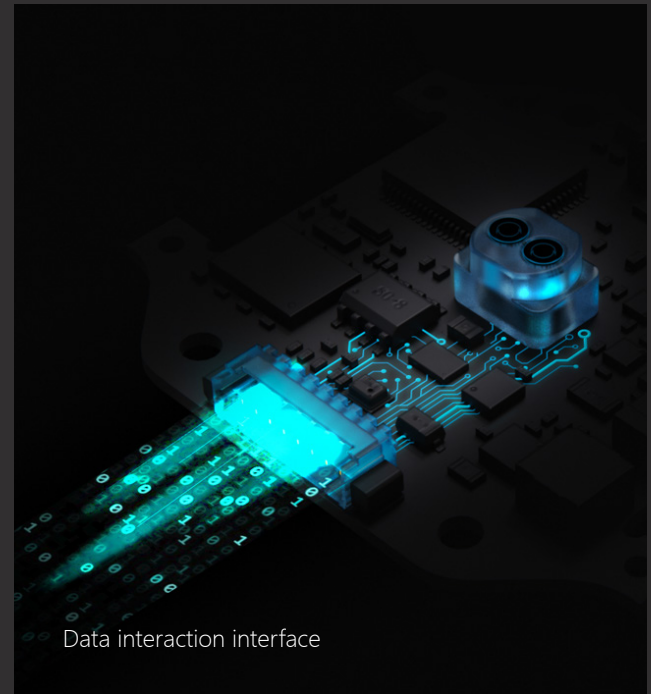

Record flight logs

The newly added **RTC clock** and **128M** storage space allow for accurate recording of each flight log. The system automatically generates Log flight files, which users can export and provide to Flyfire for accurate identification of the cause of a crash.

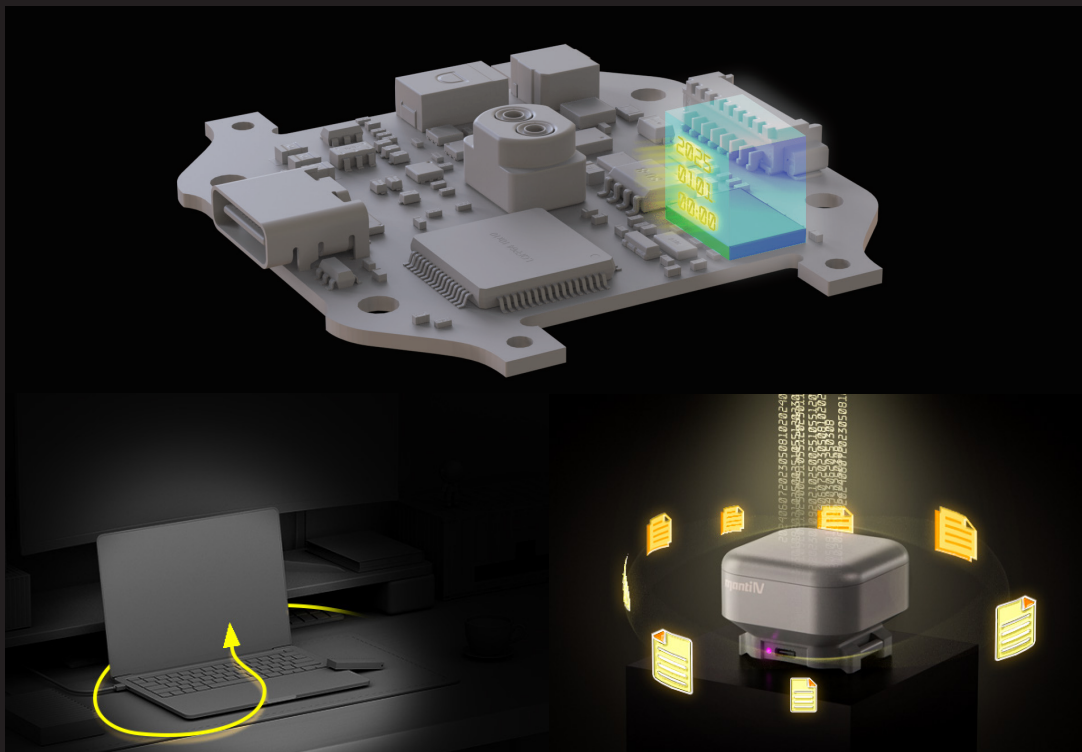

Firmware updates via USB drive, more hassle - free

Flight logs are generated and sorted by number

Fast charging, no problem even if you leave in a hurry

Fast recharging, from 0% to 70% in just 30 minutes, which is enough for three flights*, allowing you to fly safely and smoothly.



Calculated based on a 30 - minute flight duration per sortie

Manti 4 Dock

The **Manti 4 Dock** is the enhanced version of the Manti 4 series. It connects to the drone's flight control system through a reserved data interaction interface. In addition to its own sensor data, it supplements the data from the drone's sensors. The parachute deployment is determined by the fusion of dual data sources, which enhances reliability.




Emergency Light Edition



Basic Edition(No Lights)

Manti4 Dock FTS propeller stop

When danger comes, at the moment of parachute deployment, the parachute sends a stop - propeller command to the drone's flight control system. The flight control system stops the propeller before the parachute deployment action and sends a signal to Manti that the propeller has stopped. Then Manti deploys the parachute, fundamentally solving the risk of propeller entanglement. This step will be completed within **500ms** to ensure the best opportunity to save the drone.

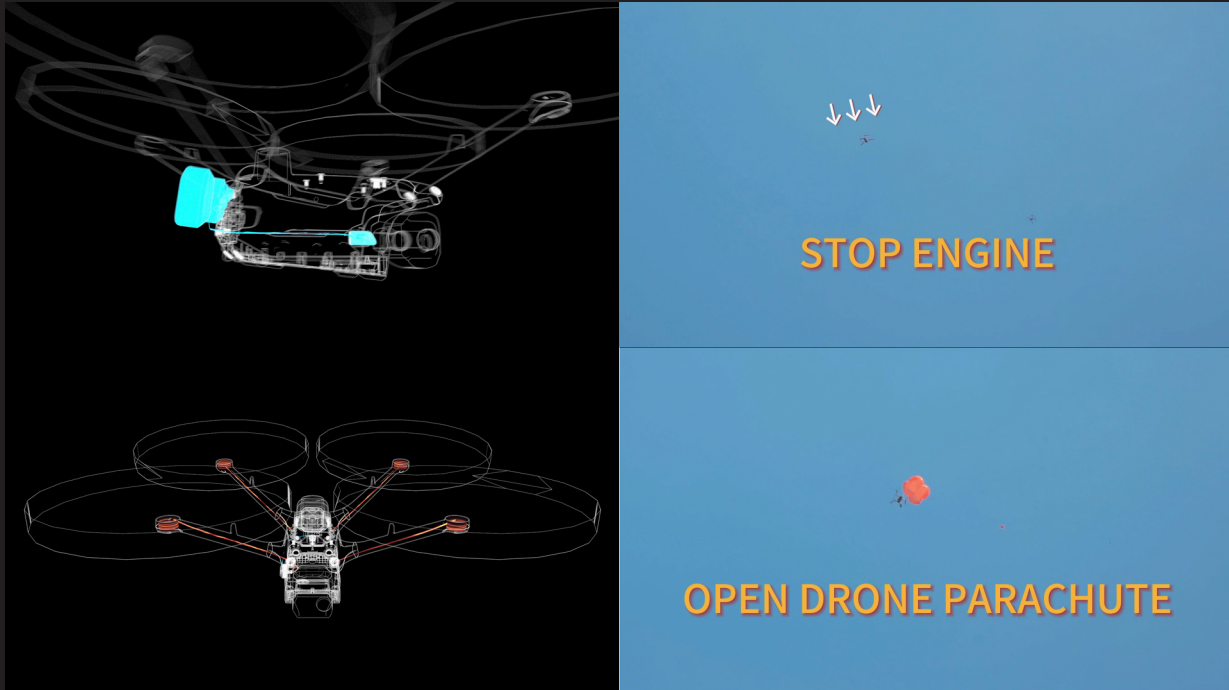

Manti 4 Dock red and blue flashing lights

For unmanned operations, the **Manti 4 Dock** parachute is equipped with red and blue flashing LEDs. Controlled by **DJI Pilot** and **flighthub-2**, the lights can be manually activated when the drone initiates a mission, providing real - time warning and deterrence to people on the ground.



What to do after the parachute is deployed?

Users of Manti 4 and Manti 4 Dock can purchase the standard parachute compartment products themselves and replace them on their own, which is convenient and fast.



mantiV

mantiV DOCK

Models: Manti 4	Models: Manti 4Dock
Compatible models: MATRICE4	Compatible models: Matrice 4D/4TD
Mavic Pro\2\3\4	Communication: eport-lite psdk
Mavic Air 2\3	Function: 3+3W Red and Blue Strobe/ FTS
Phantom 3\4	Software control: DJI Pilot 2 / flighthub-2
Communication: -	Sink rate: 5.8m/s
Sink rate: 5.5m/s	Working hours: 4.5h
Working hours: 4.5h	Response distance: 8m
Response distance: 8m	Working altitude: ≤4000m
Working altitude: ≤4000m	Impact kinetic energy: 29.241Joules
Impact kinetic energy: 18.15Joules	Product dimensions: 68*60*54mm(E)
Product dimensions: 60*60*45mm	68*60*47mm(B)
Enclosure material: PC	Enclosure material: PC
Parachute compartment dimensions: 60*60*32mm	Parachute compartment dimensions: 60*60*32mm
Weight: 72g	Weight: 92g(Emergency Light Edition)
Canopy area: 1.1m²	80g(Basic Edition(No Lights))
Parachute cord standard: GB/T 3923.1	Canopy area: 1.1m²
Canopy strength standard: FZ/T 65001-1995	Parachute cord standard: GB/T 3923.1
	Canopy strength standard: FZ/T 65001-1995

Flyfire.

www.xflyfire.com