

K40T-MINI 四光云台相机

K40T-MINI Four-Sensor Gimbal camera

产品简介 | Product Introduction

K40T-MINI四光云台相机为轻量化复合传感器无人机载荷，集成可见光/红外/激光测距，搭载三轴增稳云台，支持高速运动下的稳定观测及跟踪，配合1200米激光测距实现目标快速定位。内置4T算力AI芯片，可实现人员、车辆等目标自动识别。整机重量小于250g，适用于电力巡检、应急救援等场景，实现广域侦察到精准定位的全流程闭环。

The K40T-MINI four-sensor gimbal camera is a lightweight composite sensor drone payload that integrates visible light/infrared/laser ranging, and is equipped with a 3-axis stabilized gimbal. It supports stable observation and tracking under high-speed motion, and can achieve rapid target positioning with a 1200m laser ranging. The built-in 4T computing power AI chip can realize automatic recognition of targets such as personnel and vehicles. The whole machine weighs less than 250g and is suitable for scenes such as power inspection and emergency rescue, realizing a full-process closed loop from wide-area reconnaissance to precise positioning.



250g

云台重量
Weight

4T

算力
Computing Power


3X

光学变焦
Optical Zoom

80X

混合变焦
Hybrid zoom

云台外观尺寸 | Gimbal Appearance Dimensions

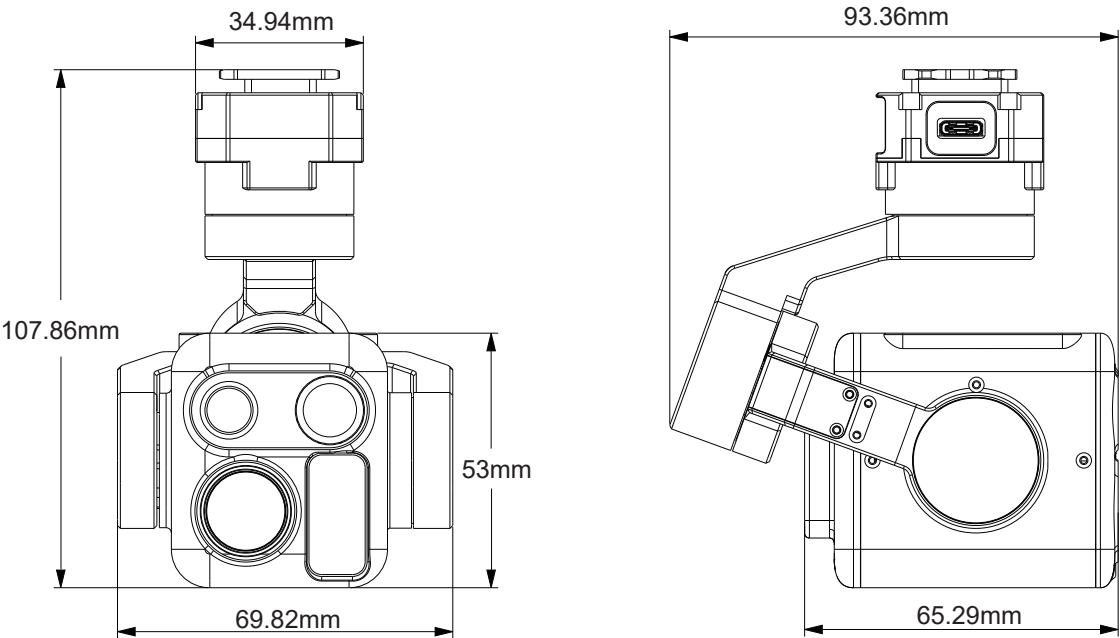

参数列表 | Parameter List

云台参数 Gimbal Parameters			
轴数 Number of Axes	机械三轴 Mechanical three axes		
控制角度范围 Controllable Angle Range	俯仰: -135°至+45° Pitch: -135° to +45°	横滚: -45°至+45° Roll: -45° to +45°	偏航: -135°至+135° Yaw: -135° to +135°
最大控制转速 Maximum Control Speed	180°/S		
角度抖动量 Angle Jitter	±0.005°		
接口 Interface	网口/串口/sbus Network port/Serial port/Sbus		

红外相机参数 Infrared Camera Parameters	
探测器类型 Detector Type	氧化钒非制冷红外焦平面探测器 Vanadium oxide uncooled infrared focal plane detector
分辨率 Resolution	640x512/1280x1024 (红外超分辨率) 640x512/1280x1024 (infrared super resolution)
像元间距 Pixel Spacing	12μm
帧频 Frame Rate	60Hz 30Hz
响应波段 Response Band	8~14μm

广角相机 Wide-Angle Camera			
传感器大小 Sensor Size	传感器大小1/2.8英寸 Sensor Size 1/2.8 inches	有效像素 Effective Pixels	800万 8 million
广角焦距 Wide-Angle Focal Length	8mm	广角光圈 Wide-Angle Aperture	F1.6
FOV	DFOV 48.8°		

长焦相机 Telephoto Camera			
传感器大小 Sensor Size	1/2.8英寸 1/2.8 inches	有效像素 Effective Pixels	800万 8 million
光圈 Aperture	F3.5	焦距 Focal Length	25mm
FOV	DFOV 15°		

激光测距仪 Laser Rangefinder			
测量范围 Measuring Range	5-1200 m	测量精度 Measuring Accuracy	0.1 m