

K8T-V2双光云台相机

K8T-V2 Dual-Sensor Gimbal Camera

产品简介 | Product Introduction

K8T-V2双光云台相机集卓越性能与稳定性于一身，热成像与800万像素广角强强联合，红外支持超分辨率细节增强，可见光输出4K超高清视频，昼夜无阻。搭载三轴增稳云台，支持高速运动下的稳定观测及跟踪，内置4T算力AI芯片，可实现人员、车辆等目标自动识别。整机重量仅162g，全场景灵活适配：支持多协议接口，可快速集成于安防、巡检、救援等多种智能平台，无论是边境安防、电力巡检，还是应急救援与工业检测，这都是您值得信赖的全天候“双眼”。

The K8T-V2 dual-sensor gimbal camera integrates superior performance and advanced stabilization into one compact system. It combines thermal imaging with an 8-megapixel wide-angle lens, featuring infrared super-resolution enhancement for detailed detection and visible-light 4K ultra-HD video around the clock.

Equipped with a three-axis stabilized gimbal, it ensures smooth observation and tracking even during high-speed motion. Built-in AI computing power of 4 TOPS enables automatic recognition of targets such as people and vehicles. Weighing only 162 grams, it offers versatile adaptability across various scenarios and supports multiple protocol interfaces for seamless integration into security, inspection, rescue, and other intelligent platforms.

Whether applied in border security, power line inspection, emergency response, or industrial monitoring—the K8T-V2 serves as your trusted all-weather “eyes”.



162g

云台重量
Weight




4T

算力
Computing Power

40X

数字变焦
Digital Zoom

云台外观尺寸 | Gimbal Appearance Dimensions

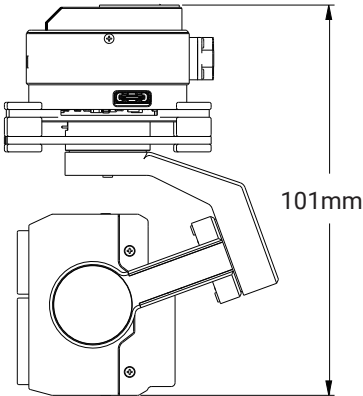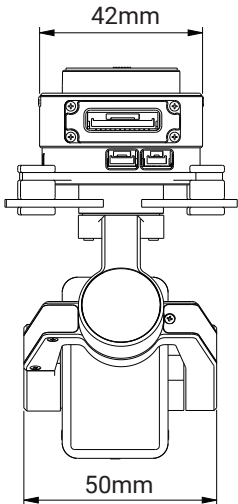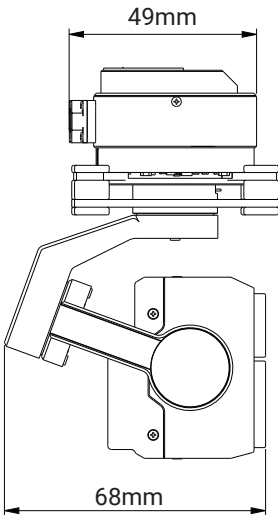

参数列表 | Parameter List

云台参数 Gimbal Parameters			
轴数 Number of Axes	机械三轴 Mechanical three axes		
控制角度范围 Controllable Angle Range	俯仰:-135°至+45° Pitch: -135° to +45°	横滚:-45°至+45° Roll: -45° to +45°	偏航:-135°至+135° Yaw: -135° to +135°
最大控制转速 Maximum Control Speed	180°/S		
角度抖动量 Angle Jitter	±0.005°		
接口 Interface	网口/串口/sbus Network port/Serial port/Sbus		

红外相机参数 Infrared Camera Parameters	
探测器类型 Detector Type	氧化钒非制冷红外焦平面探测器 Vanadium oxide uncooled infrared focal plane detector
分辨率 Resolution	640x512/1280x1024 (红外超分辨率) 640x512/1280x1024 (infrared super resolution)
像元间距 Pixel Spacing	12μm
帧频 Frame Rate	60Hz 30Hz
响应波段 Response Band	8~14μm
焦距 Focal Length	18mm
FOV	24.2°x19 5°

广角相机 Wide-Angle Camera	
传感器大小 Sensor Size	传感器大小1/2.8英寸 Sensor Size 1/2.8 inches
广角焦距 Wide-Angle Focal Length	8mm
有效像素 Effective Pixels	800万 8 million
广角光圈 Wide-Angle Aperture	F1.6
视场角 View Angle	H:42.2° V:23.4° D: 48.8°