McMASTER-CARR®

# Ball Bearing

## Flanged, Shielded, Trade No. R188-2Z, Standard Inner Ring

Delivers tomorrow

$5.70 each
57155K323

| | |
|---|---|
| For Shaft Type | Round |
| Bearing Seal Type | Shielded |
| Material | 440C Stainless Steel |
| For Shaft Diameter | 1/4" |
| For Housing ID | 1/2" |
| Width | 3/16" |
| Width Tolerance | -0.001" to 0" |
| Flange | |
| OD | 0.547" |
| Thk. | 0.05" |
| ABEC Rating | 5 |
| Dynamic Radial Load Capacity | 240 lb. |
| Maximum Rotation Speed | 50,000 rpm |
| Temperature Range | |
| Minimum | -65° F |
| Max. | 250° F |
| Inner Ring Type | Standard |
| Bearing Trade Number | R188-2Z |
| Ball Bearing Profile | Flanged |
| Ball Material | 440C Stainless Steel |
| Bearing Construction | Single Row |
| Bearing Type | Ball |
| Cage Material | 400 Series Stainless Steel |
| For Load Direction | Radial |
| ID | 0.25" |
| ID Tolerance | -0.0002" to 0" |
| Lubricant | Oil |
| Lubrication | Lubricated |
| OD | 0.5" |
| OD Tolerance | -0.0002" to 0" |
| Performance | Corrosion Resistant, Precision |
| Radial Clearance | 0.0002" to 0.0004" |
| Radial Clearance Trade Number | MC3 |
| Shaft Mount Type | Press Fit |
| Shield Material | 300 Series Stainless Steel |
| Static Radial Load Capacity | 90 lb. |
| System of Measurement | Inch |
| Country of Origin | China, Japan |
| DFARS Compliance | Specialty Metals COTS-Exempt |
| Export Control Classification Number (ECCN) | 1C999 |
| REACH Compliance | REACH (EC 1907/2006) (01/23/2024, 240 SVHC) Compliant |
| RoHS Compliance | RoHS 3 (2015/863/EU) Compliant |

| | |
|---|---|
| Schedule B Number | 848210.5044 |
| U.S.–Mexico–Canada Agreement (USMCA) Qualifying | No |

Install these bearings inside a housing and they won't budge. The flange presses against the housing wall, so vibration and other sudden forces parallel to the shaft (thrust loads) won't knock them off-kilter.

**Shielded**—The balls are covered just enough to keep out large particles while allowing air to pass through and dissipate heat.

**Corrosion-Resistant 440C Stainless Steel**—Combine the strength of steel with the corrosion resistance of stainless steel. These bearings won't degrade from water or mild chemicals, such as the ammonia in cleaning solutions. However, they'll weaken when exposed to salt water and harsh chemicals, such as bleach.

**ABEC Rating**—Bearings with an ABEC rating meet industry tolerance standards established by the Annular Bearing Engineers Committee (ABEC). They're rated on a scale from 1 to 9. The higher the rating, the tighter the tolerance. Bearings rated ABEC 1 or 3 are precise enough for most applications. If your application consistently runs at high speeds or requires high accuracy, consider bearings rated ABEC 5 or higher, since they generate less friction and heat.

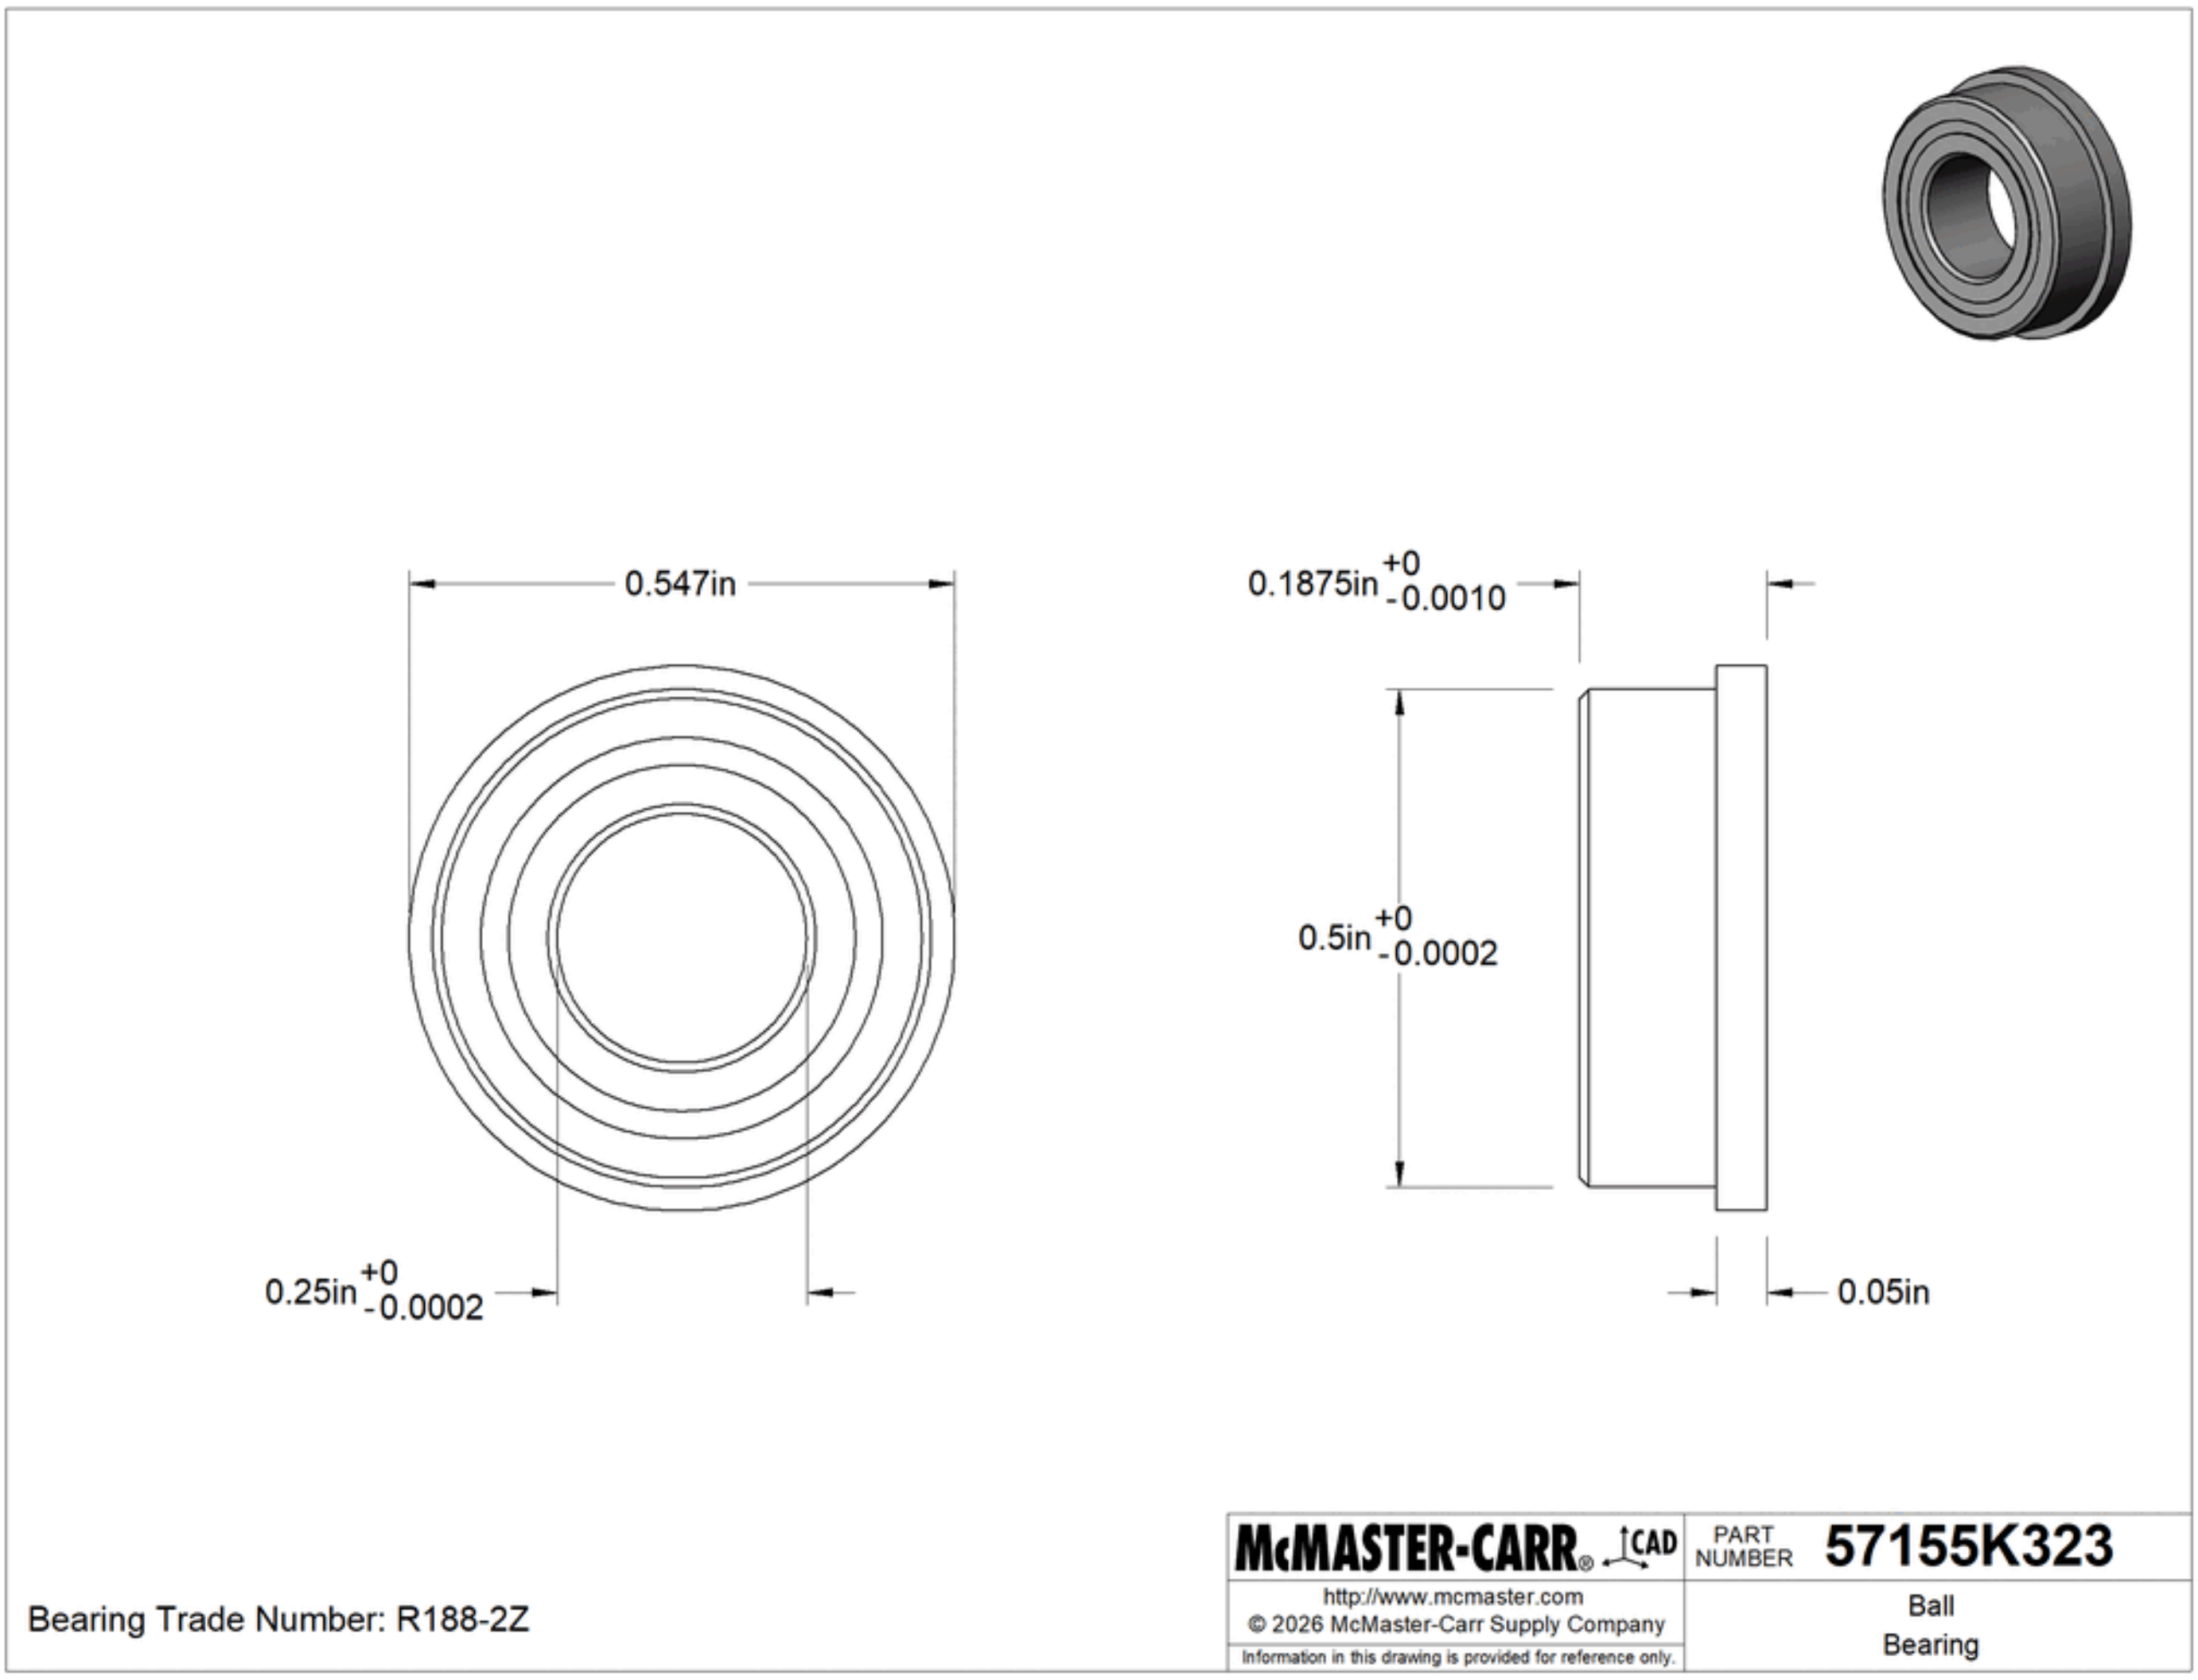


The information in this 3-D model is provided for reference only.