



External Retaining Ring

for 1/4" OD, Zinc Yellow-Chromate-Plated Spring Steel



Delivers tomorrow


\$12.44 per pack of 100
98410A113

Retaining Ring Type	External
Material	Zinc-Yellow-Chromate-Plated Carbon Steel
For OD	1/4"
For Groove	
Diameter	0.23"
Diameter Tolerance	-0.002" to 0.002"
Width	0.029"
Width Tolerance	0" to 0.003"
Ring	
ID	0.225"
ID Tolerance	-0.004" to 0.002"
Thk.	0.025"
Thk. Tolerance	-0.002" to 0.002"
Thrust Load Capacity	590 lbf
Minimum Hardness	Rockwell C40
Specifications Met	ASME B18.27.1
Magnetic Properties	Magnetic
Retaining Ring Style	Tapered
System of Measurement	Inch
Country of Origin	United States
DFARS Compliance	Specialty Metals COTS-Exempt
Export Control Classification Number (ECCN)	EAR99
REACH Compliance	REACH (EC 1907/2006) (02/04/2026, 253 SVHC) Compliant
RoHS Compliance	Not Compliant
Schedule B Number	731824.0000
U.S.–Mexico–Canada Agreement (USMCA) Qualifying	Yes
Related Product	Pliers

Secure components on a shaft with our go-to external retaining rings. Shaped in the most common style, these are tapered so the thickest section is opposite their opening for a secure 360-degree hold. Open with retaining ring pliers, pass over the end of a shaft, then release them to spring into a groove.

Ring ID is measured with the ring uninstalled.

Zinc-Yellow-Chromate-Plated Carbon Steel—These rings are strong with good wear resistance. They provide some corrosion resistance, but not as much as stainless steel rings.

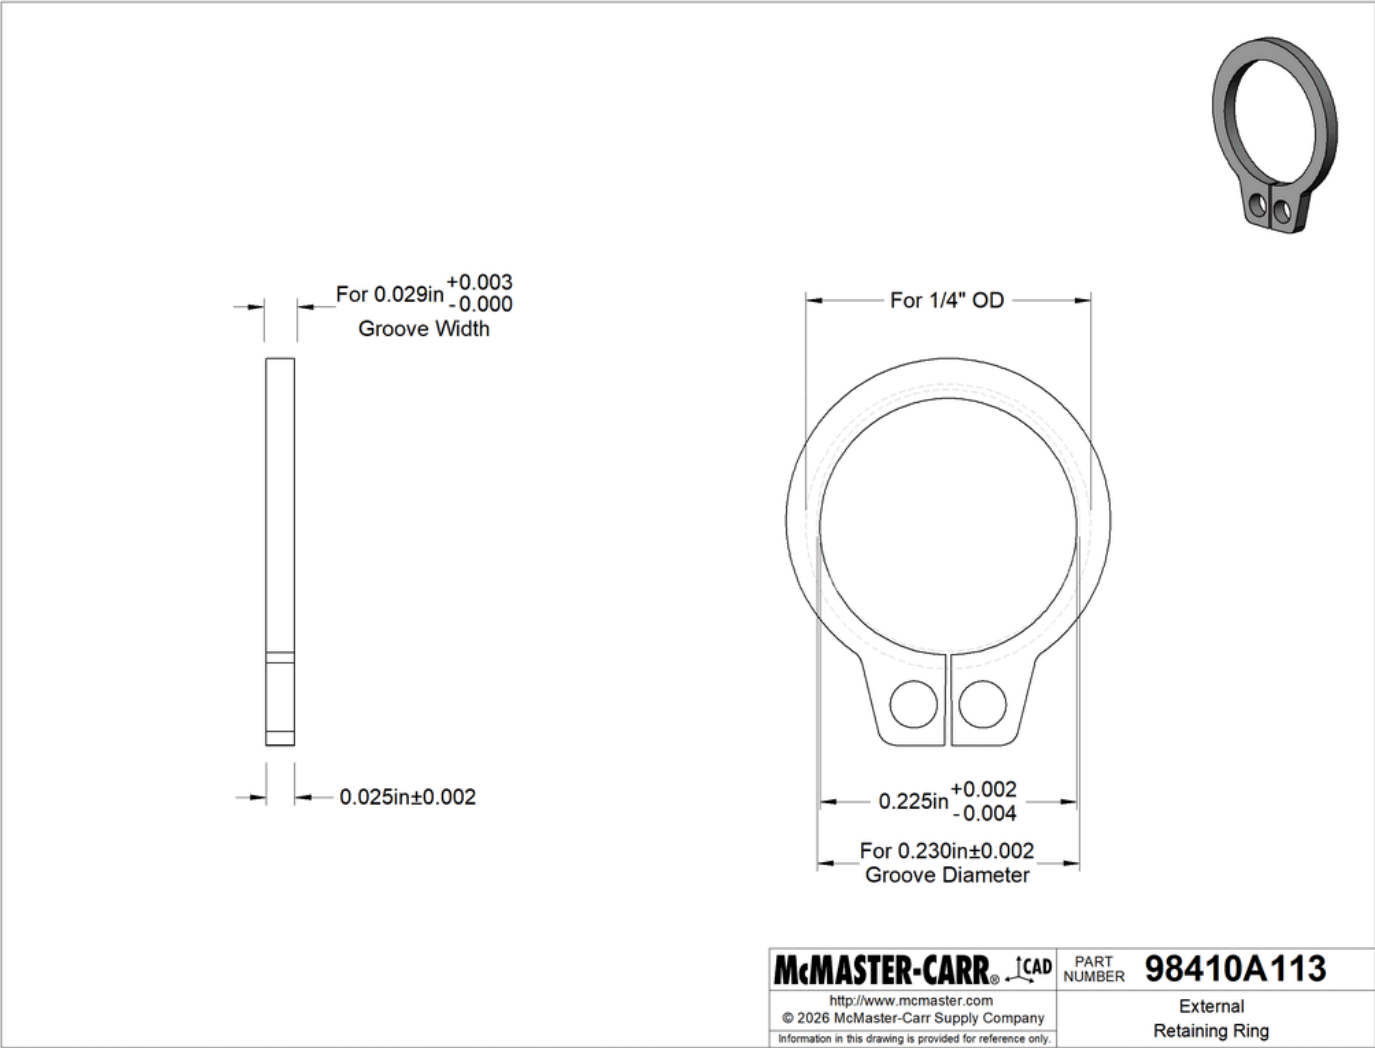

The information in this 3-D model is provided for reference only.