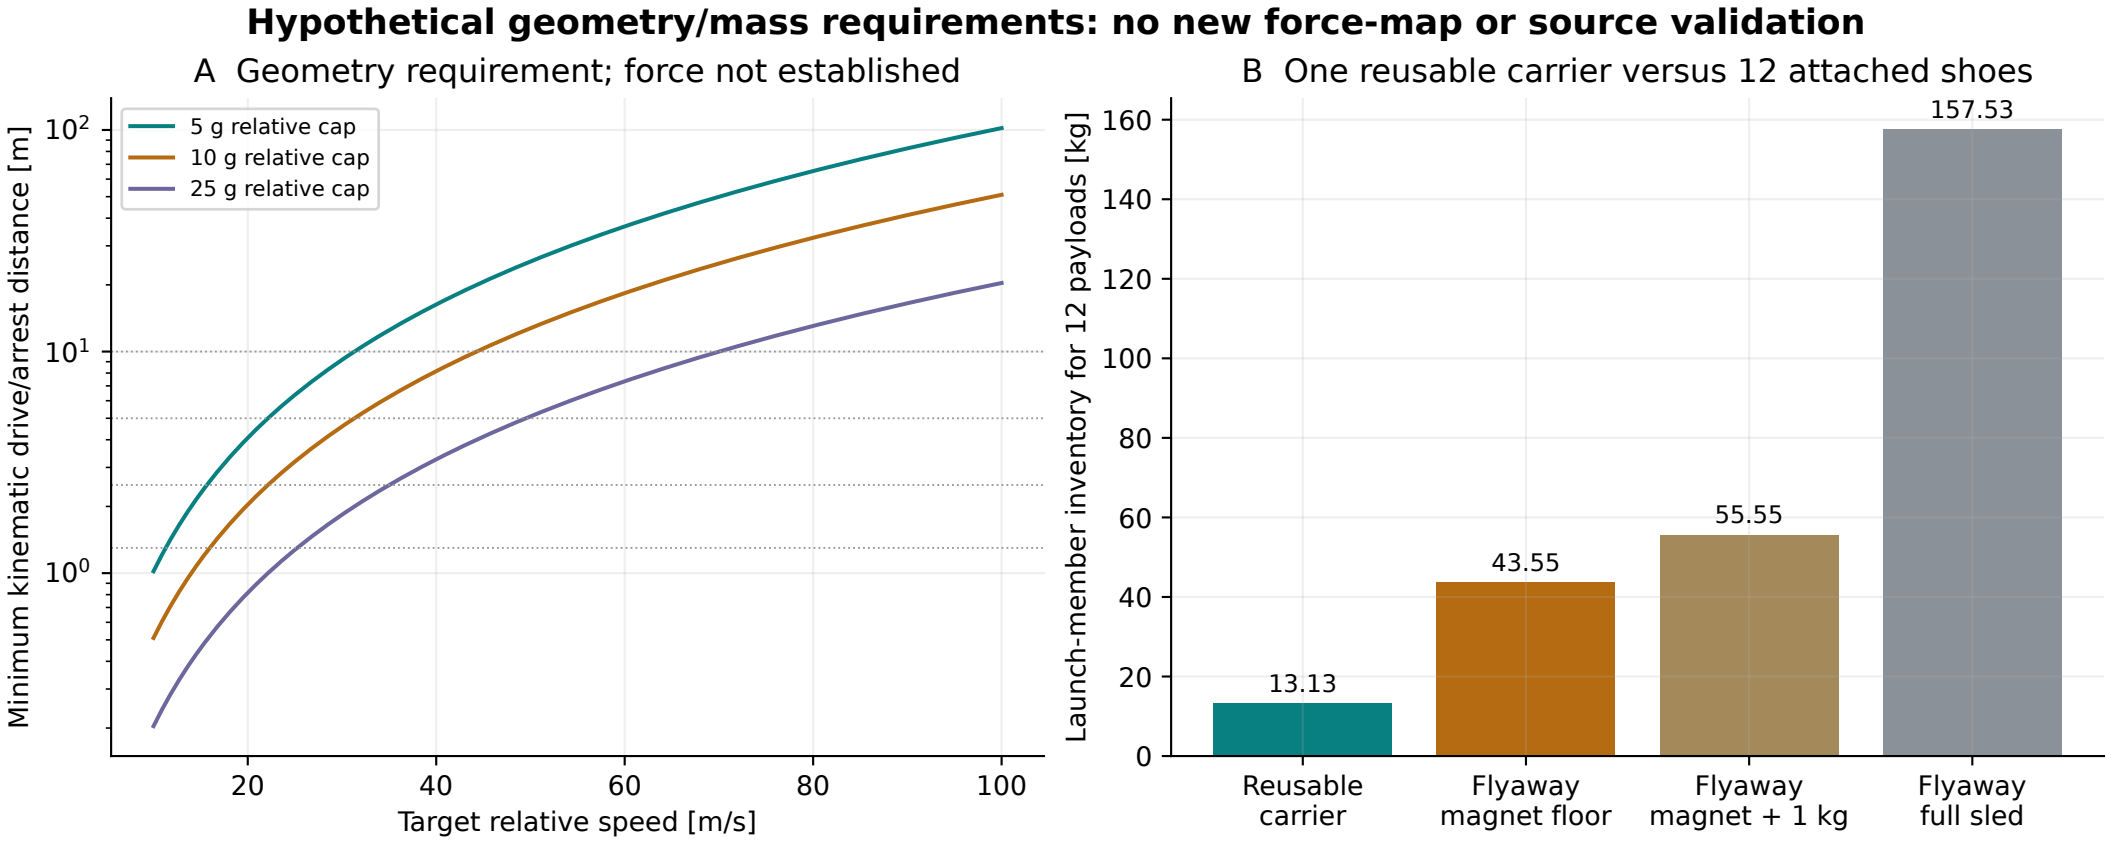
Hypothetical geometry/mass requirements: no new force-map or source validation
A Geometry requirement; force not established
5 g relative cap
10 g relative cap
25 g relative cap
Minimum kinematic drive/arrest distance [m]
$10^2$
$10^1$
$10^0$
20
40
60
80
100
Target relative speed [m/s]
B One reusable carrier versus 12 attached shoes
Launch-member inventory for 12 payloads [kg]
0
20
40
60
80
100
120
140
160
13.13
43.55
55.55
157.53
Reusable carrier
Flyaway magnet floor
Flyaway magnet + 1 kg
Flyaway full sled