VOLLEY-G5-ACR1

Motor section and launch datums

OUTLINE / PRELIMINARY ENGINEERING — dimensions in mm; no general manufacturing tolerance assigned

SECTION A-A at X = 400 | scale 1:2

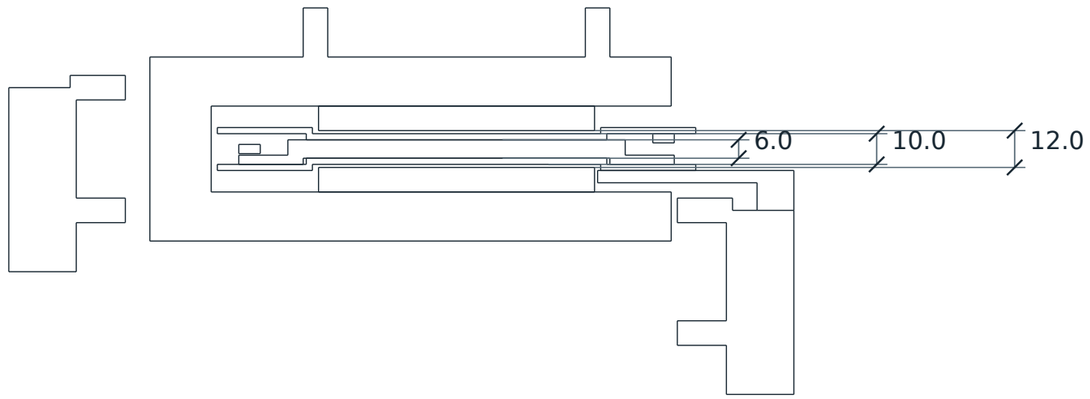

Nominal transverse stack (Z):
Upper magnet inner face +6
Upper GFRP outer face +5
Upper copper face +3
Lower copper face -3
Lower GFRP outer face -5
Lower magnet inner face -6

Each magnet/package face gap: 1
Copper active thickness: 6
GFRP: 2 each active face
Active bar: 7 × 6 = 42 mm²
Return minimum: 7 × 3 = 21 mm²

These are CAD nominal dimensions.
Airgap budget is on sheet D05.
No blanket fit/flatness grade set.

Active magnet X relative to carrier aft: 76 to 412 (336 active; 340 mounting envelope).
Home active X: 276 to 612. Release active X: 1576 to 1912.
216 stator belts at 8 pitch: X 230 to 1958; end allowance 46 at home/release.
Payload floor Z = 46. Carrier top plate Z = 14 to 30; bottom plate Z = -30 to -14.
Native rails: -Y bounds Y -146 to -108, Z -40 to 24; +Y bounds Y 46 to 110, Z -80 to -7.