VOLLEY-G5-ACR1

Cassette feed and lift interfaces

OUTLINE / PRELIMINARY ENGINEERING — dimensions in mm; no general manufacturing tolerance assigned

South bank level 0: PLAN | scale 1:4

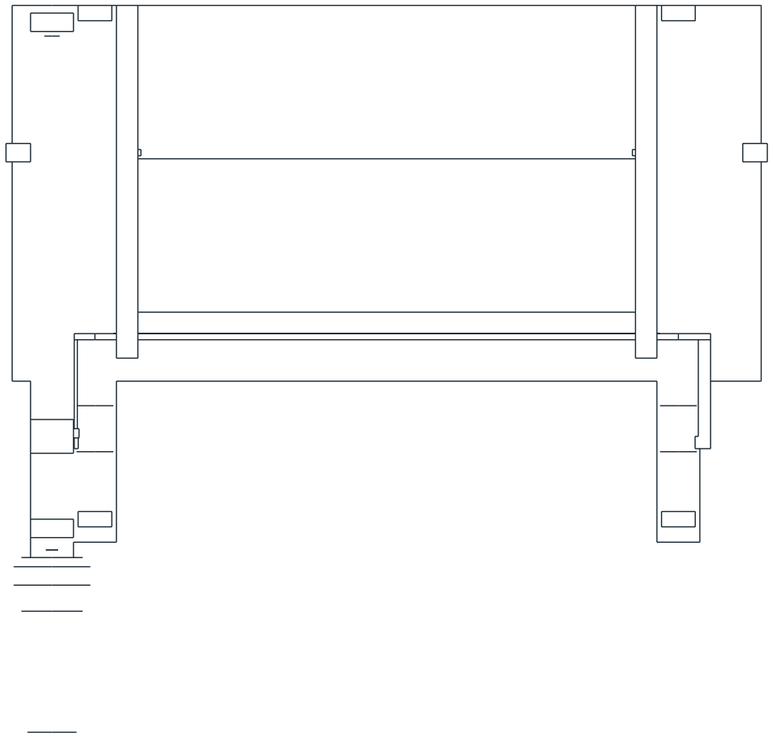

Lift/pallet: SIDE | scale 1:12.5

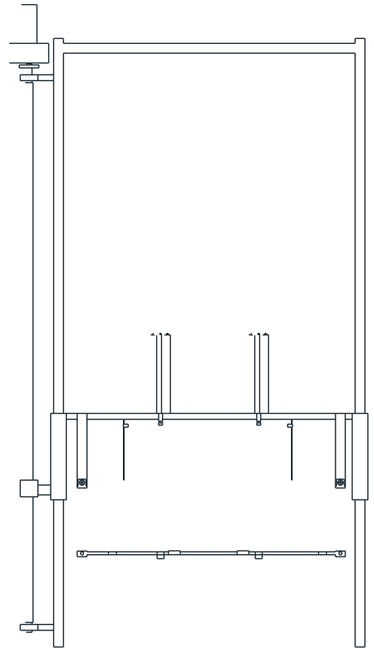

Cell floors Z: 180, 310, 440, 570, 700, 830 (pitch 130).

Payload 340.5 × 100 × 100; channel side/top clearance 2.

Cell centers Y = ±250; feed stroke 250 in 40 s (study).

Guides Ø10; span 330. Screw Ø10, lead 2, study root Ø7.4.

South guide Y = -435 to -105; front journal -120 to -100.

Lift docking floor Z = 46; highest floor 830 → travel 784.

Twin screw nominal Ø16, lead 4; study root Ø11.

Fixed screw axes Y = -200 and +220.

Reference gearbox ratio 19.8; maximum lift time 120 s.

Reference actuator envelopes do not define supplier flanges.