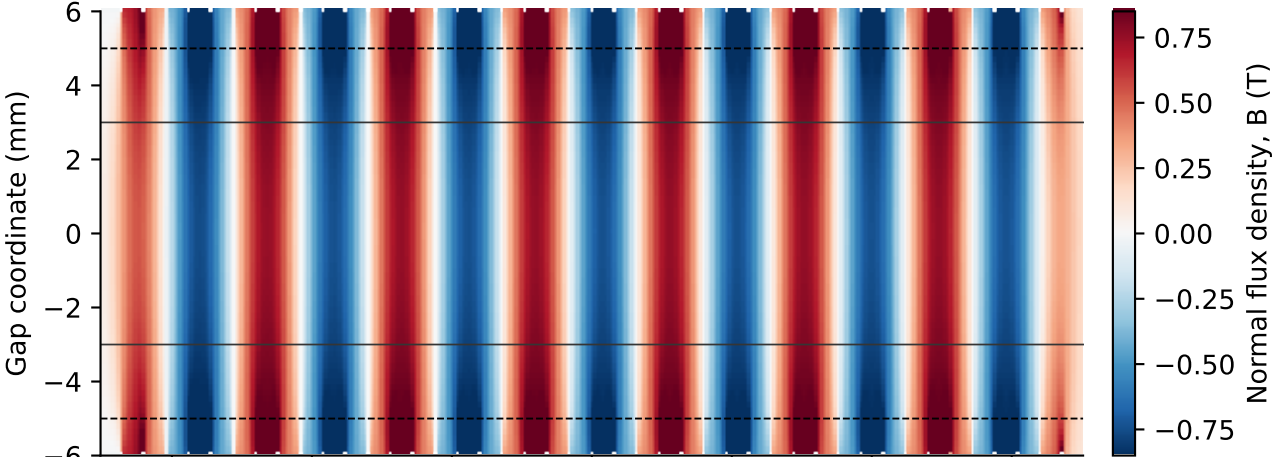

Mid-depth section. Solid lines: copper faces. Dashed lines: active insulation faces. Magnet faces at ±6 mm.