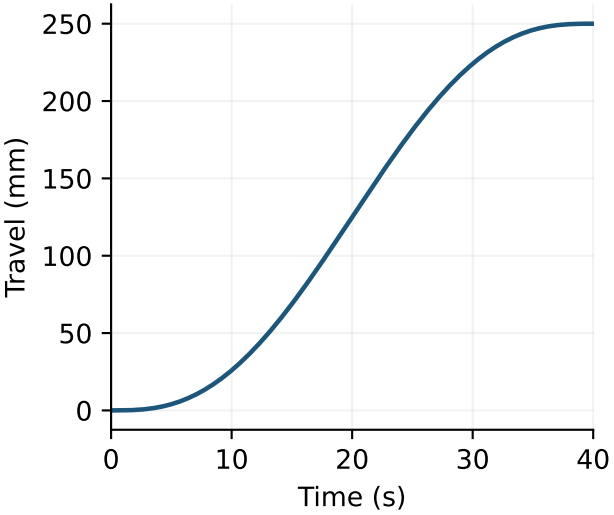

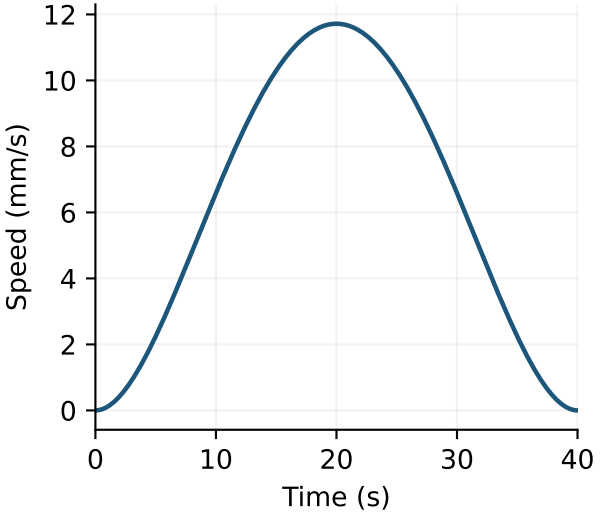

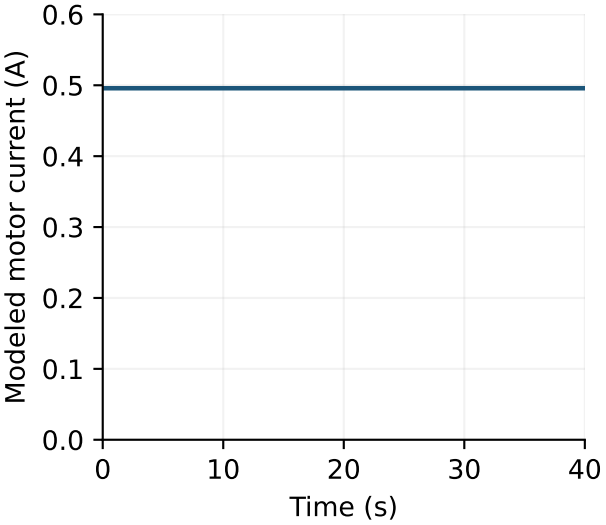

250 mm quintic command; 100 N prescribed axial resistance. Catalog motor and declared transmission efficiencies.