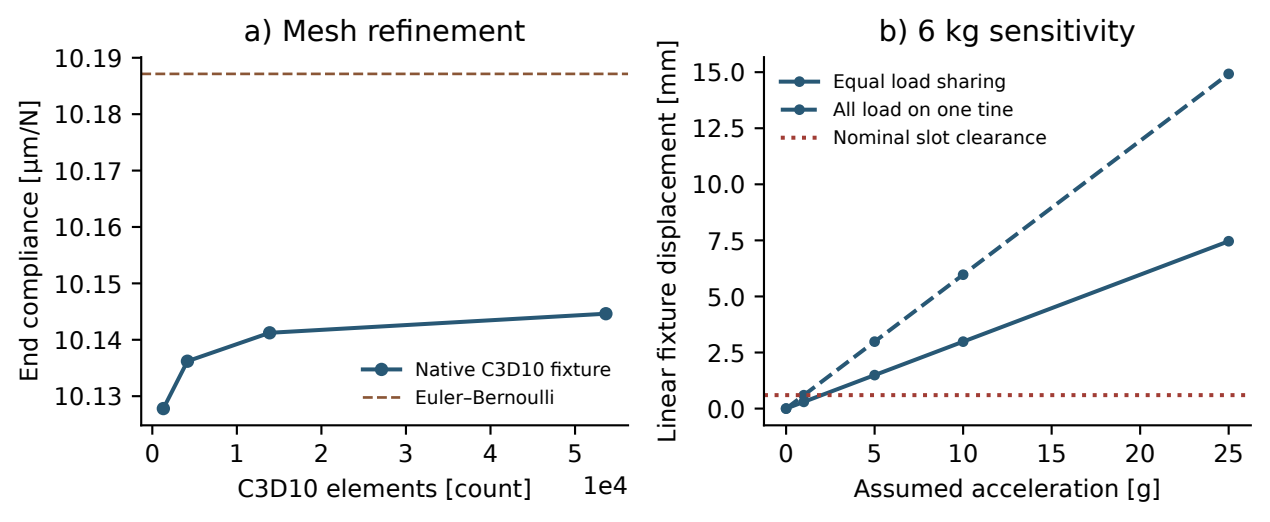
a) Mesh refinement
End compliance [µm/N]
10.19
10.18
10.17
10.16
10.15
10.14
10.13
0
1
2
3
4
5
1e4
C3D10 elements [count]
Native C3D10 fixture
Euler–Bernoulli
b) 6 kg sensitivity
Linear fixture displacement [mm]
15.0
12.5
10.0
7.5
5.0
2.5
0.0
0
5
10
15
20
25
Assumed acceleration [g]
Equal load sharing
All load on one tine
Nominal slot clearance