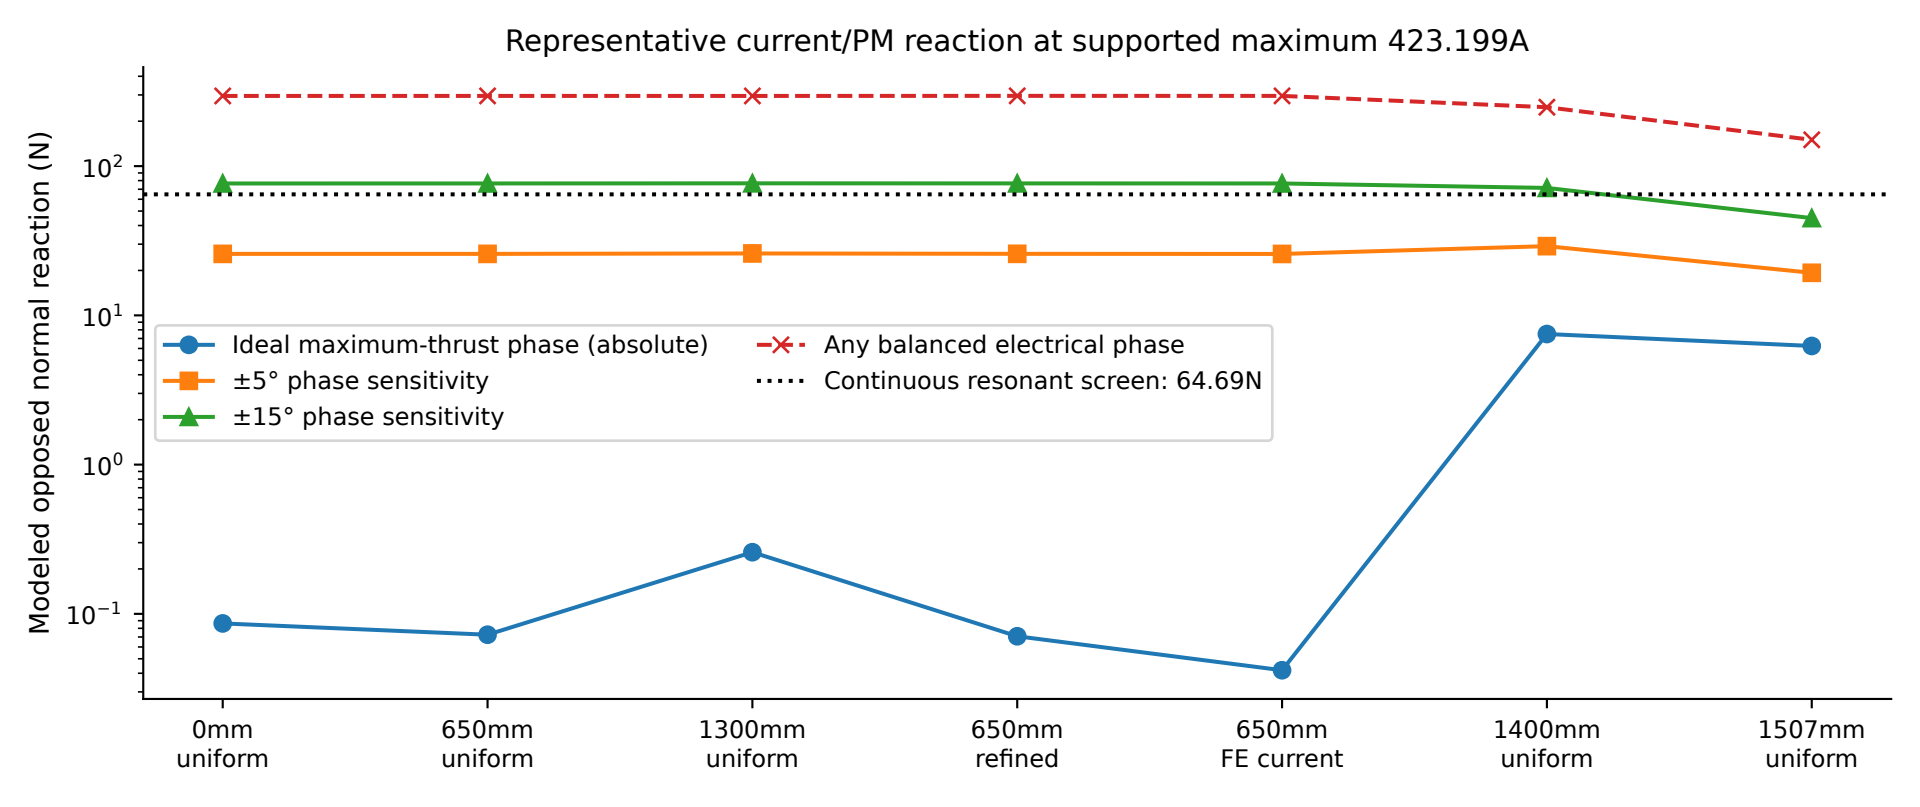
Representative current/PM reaction at supported maximum 423.199A
Modeled opposed normal reaction (N)
10^{2}
10^{1}
10^{0}
10^{-1}
Ideal maximum-thrust phase (absolute)
±5° phase sensitivity
±15° phase sensitivity
Any balanced electrical phase
Continuous resonant screen: 64.69N
0mm uniform
650mm uniform
1300mm uniform
650mm refined
650mm FE current
1400mm uniform
1507mm uniform