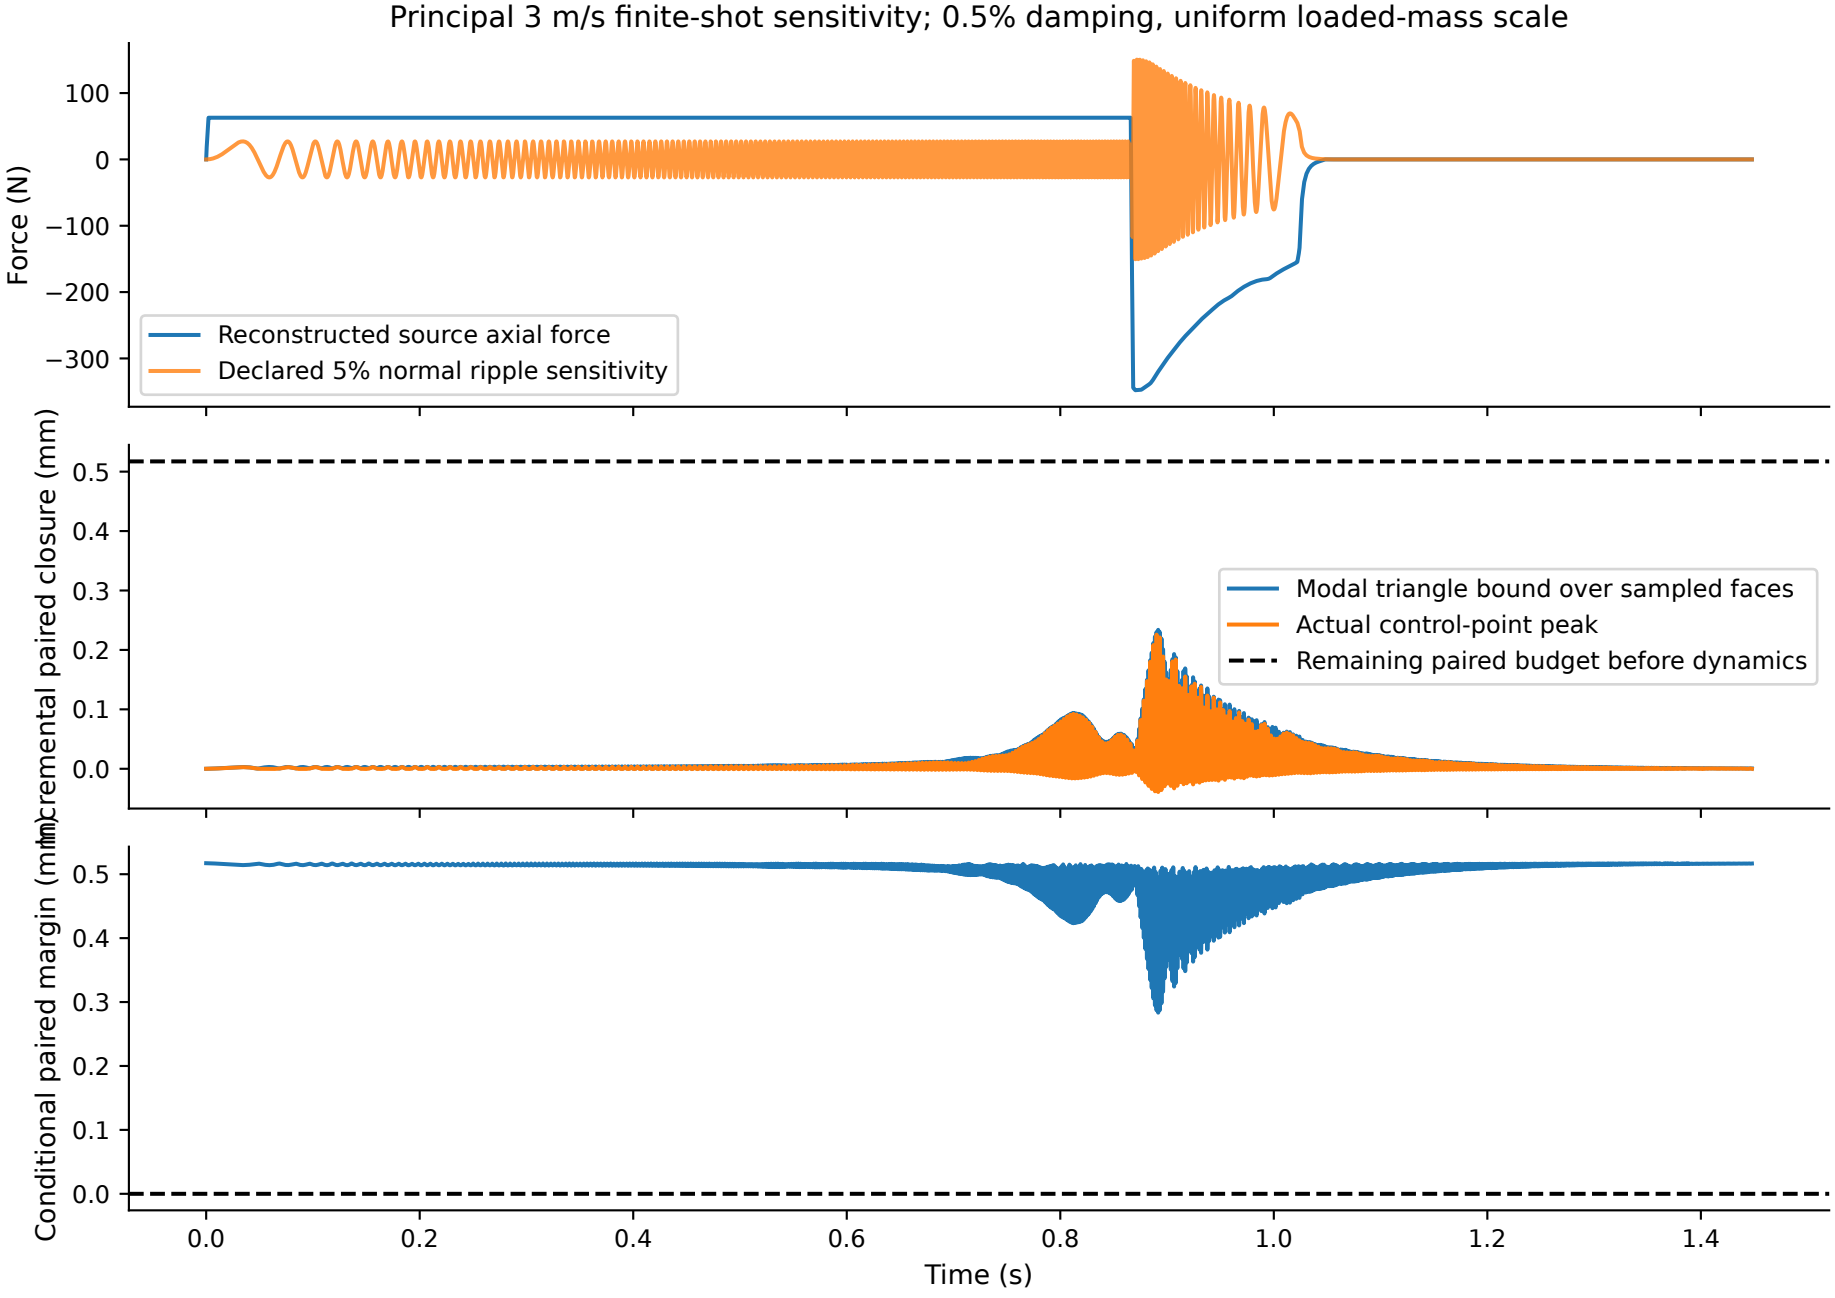

Principal 3 m/s finite-shot sensitivity; 0.5% damping, uniform loaded-mass scale
Force (N)
100
0
−100
−200
−300
Reconstructed source axial force
Declared 5% normal ripple sensitivity
Incremental paired closure (mm)
0.5
0.4
0.3
0.2
0.1
0.0
Modal triangle bound over sampled faces
Actual control-point peak
Remaining paired budget before dynamics
Conditional paired margin (mm)
0.5
0.4
0.3
0.2
0.1
0.0
0.0
0.2
0.4
0.6
0.8
1.0
1.2
1.4
Time (s)