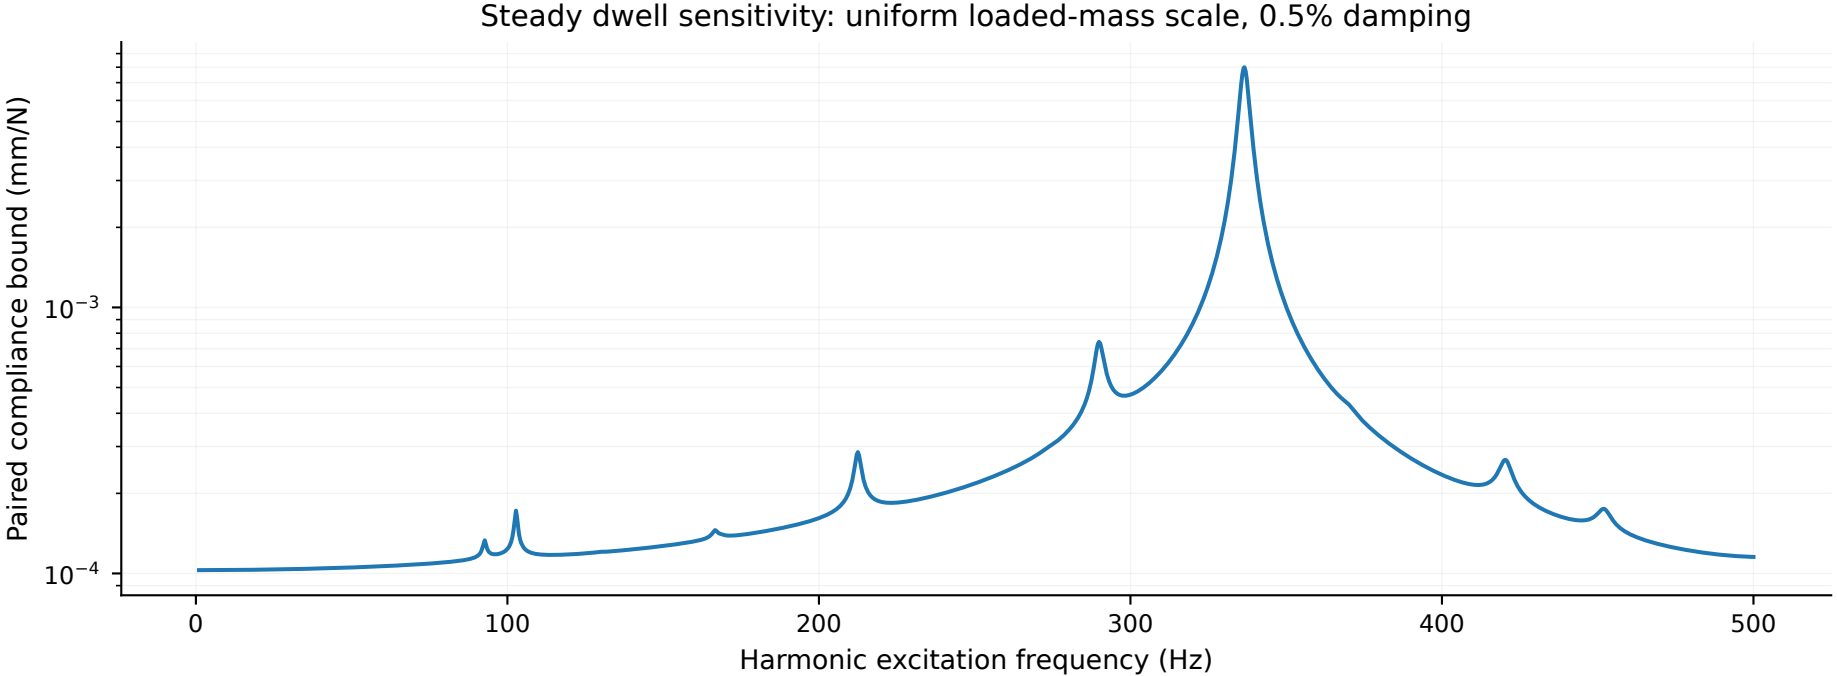
Steady dwell sensitivity: uniform loaded-mass scale, 0.5% damping
Paired compliance bound (mm/N)
10^{-3}
10^{-4}
0
100
200
300
400
500
Harmonic excitation frequency (Hz)