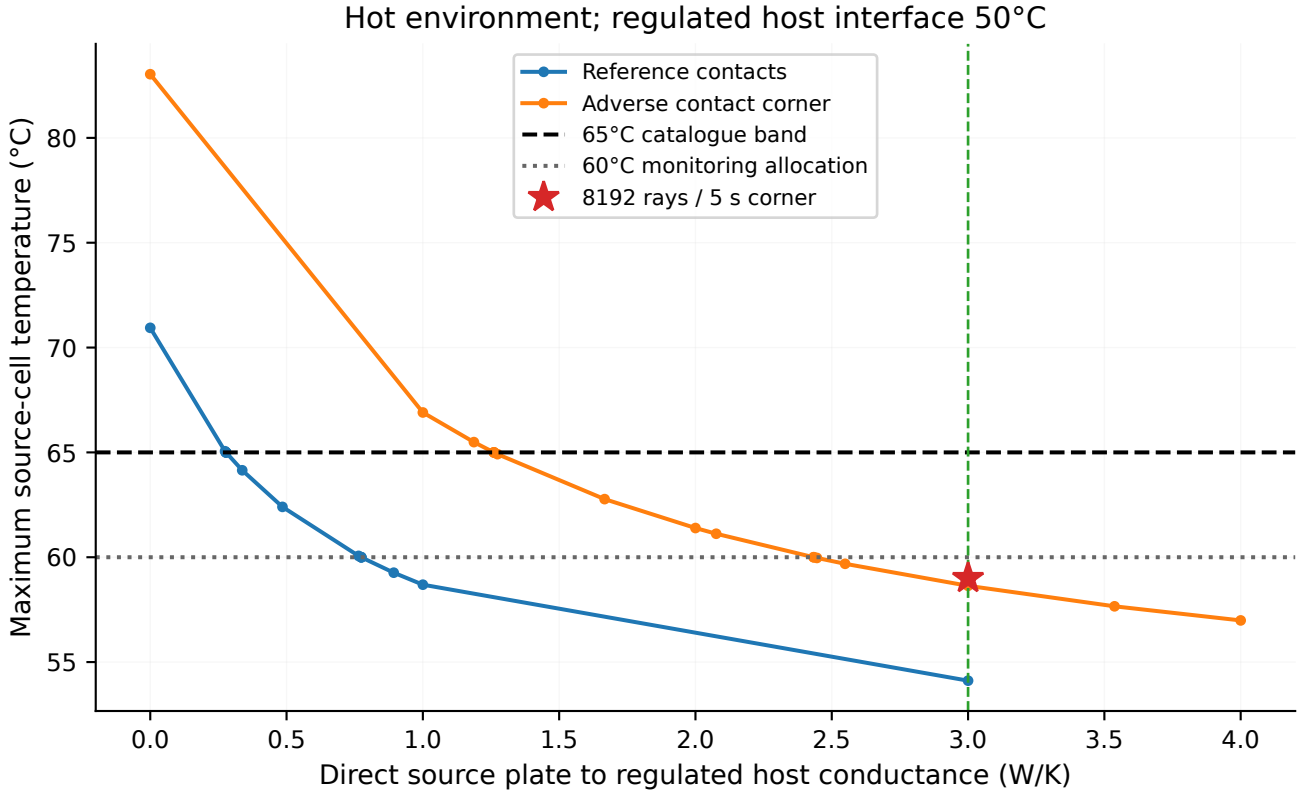
Hot environment; regulated host interface 50°C
Reference contacts
Adverse contact corner
65°C catalogue band
60°C monitoring allocation
8192 rays / 5 s corner
Maximum source-cell temperature (°C)
80
75
70
65
60
55
0.0
0.5
1.0
1.5
2.0
2.5
3.0
3.5
4.0
Direct source plate to regulated host conductance (W/K)