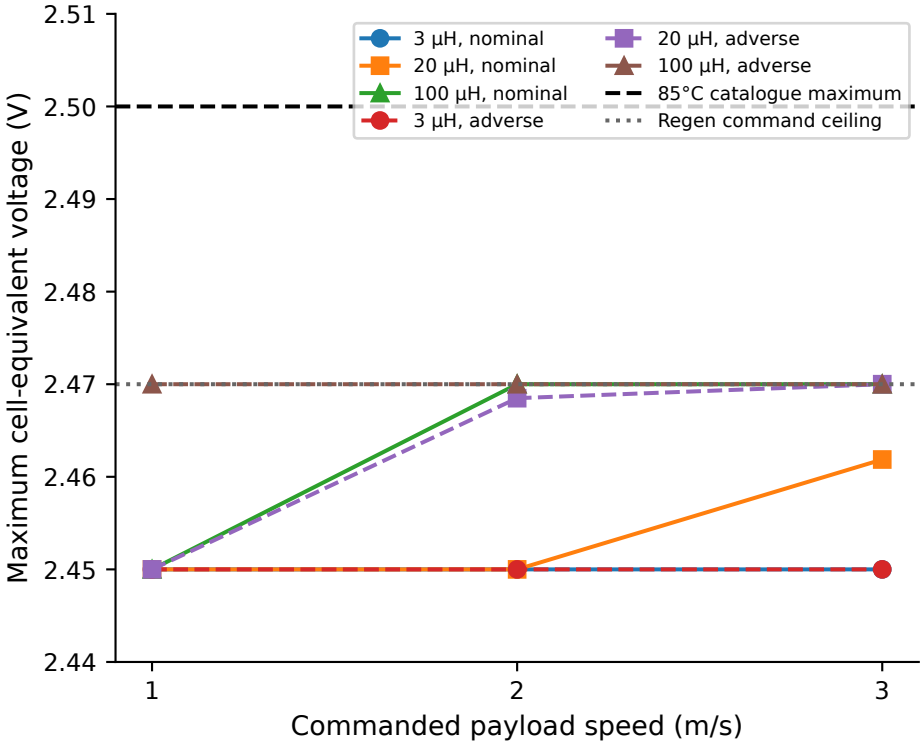
3 µH, nominal
20 µH, nominal
100 µH, nominal
3 µH, adverse
20 µH, adverse
100 µH, adverse
85°C catalogue maximum
Regen command ceiling
Maximum cell-equivalent voltage (V)
2.51
2.50
2.49
2.48
2.47
2.46
2.45
2.44
1
2
3
Commanded payload speed (m/s)

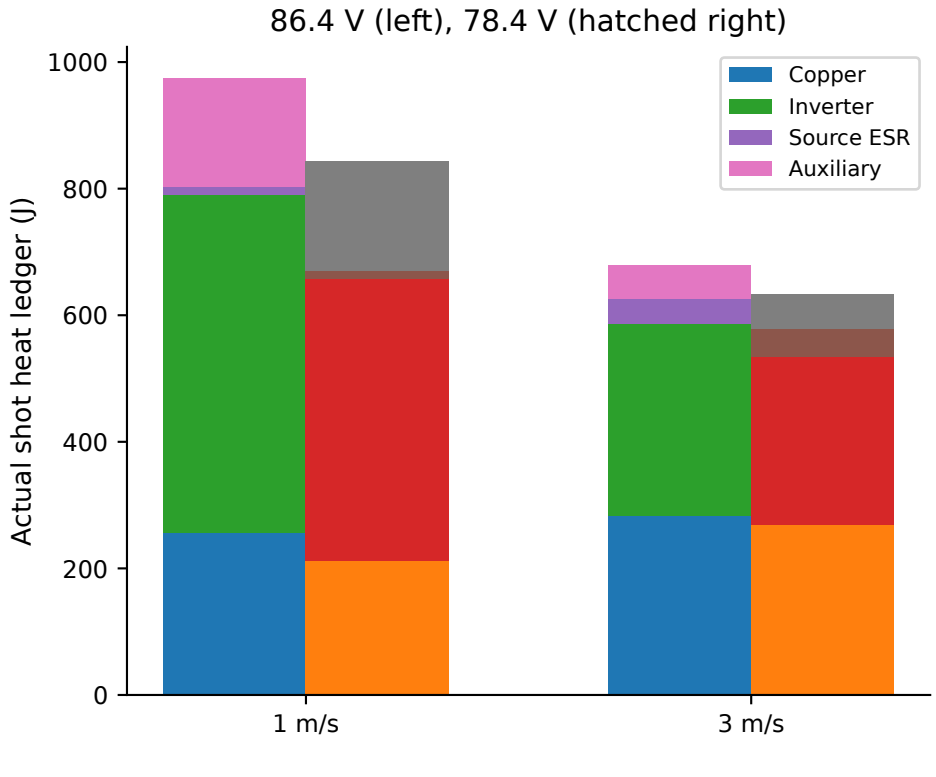
86.4 V (left), 78.4 V (hatched right)
Copper
Inverter
Source ESR
Auxiliary
Actual shot heat ledger (J)
1000
800
600
400
200
0
1 m/s
3 m/s