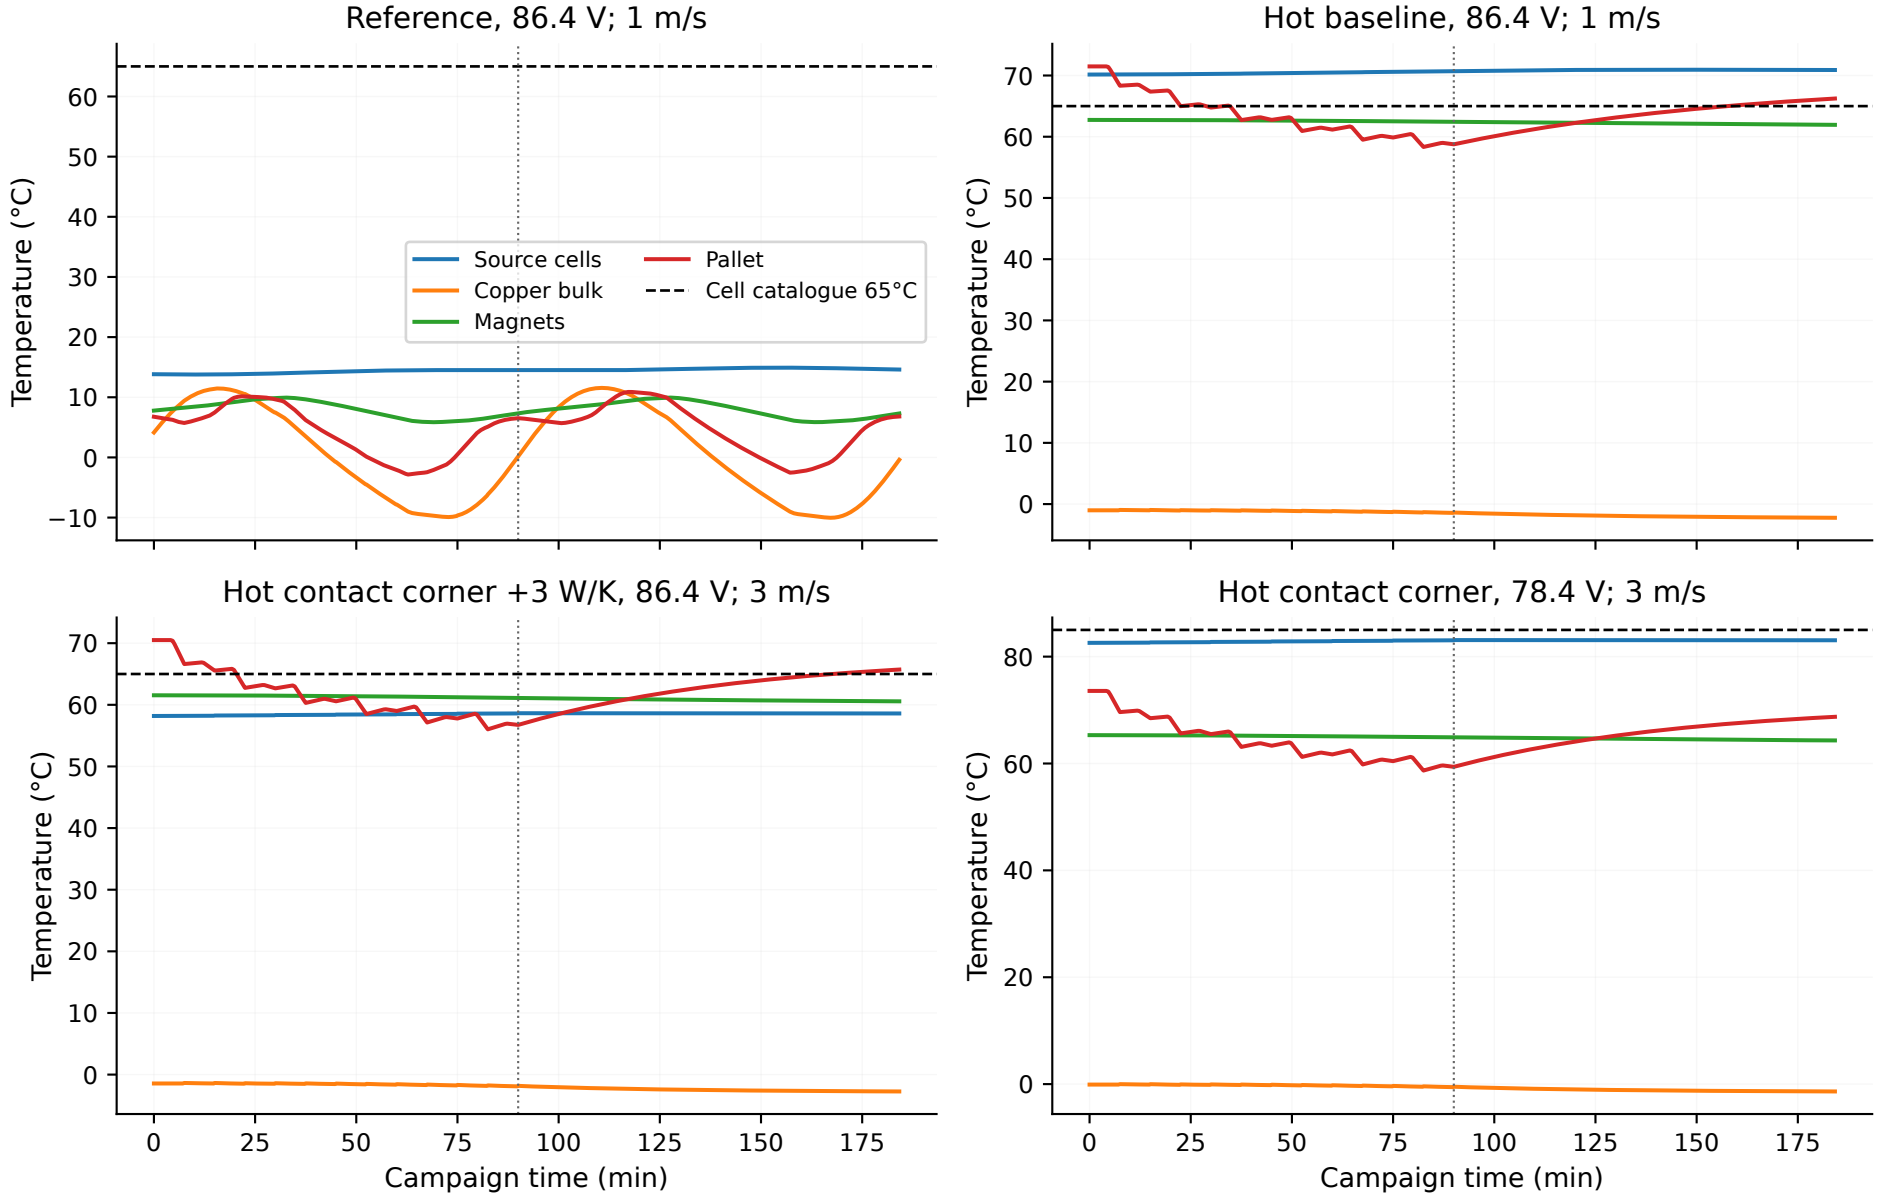
Reference, 86.4 V; 1 m/s
Hot baseline, 86.4 V; 1 m/s
Hot contact corner +3 W/K, 86.4 V; 3 m/s
Hot contact corner, 78.4 V; 3 m/s
Temperature (°C)
Campaign time (min)
Source cells
Copper bulk
Magnets
Pallet
Cell catalogue 65°C