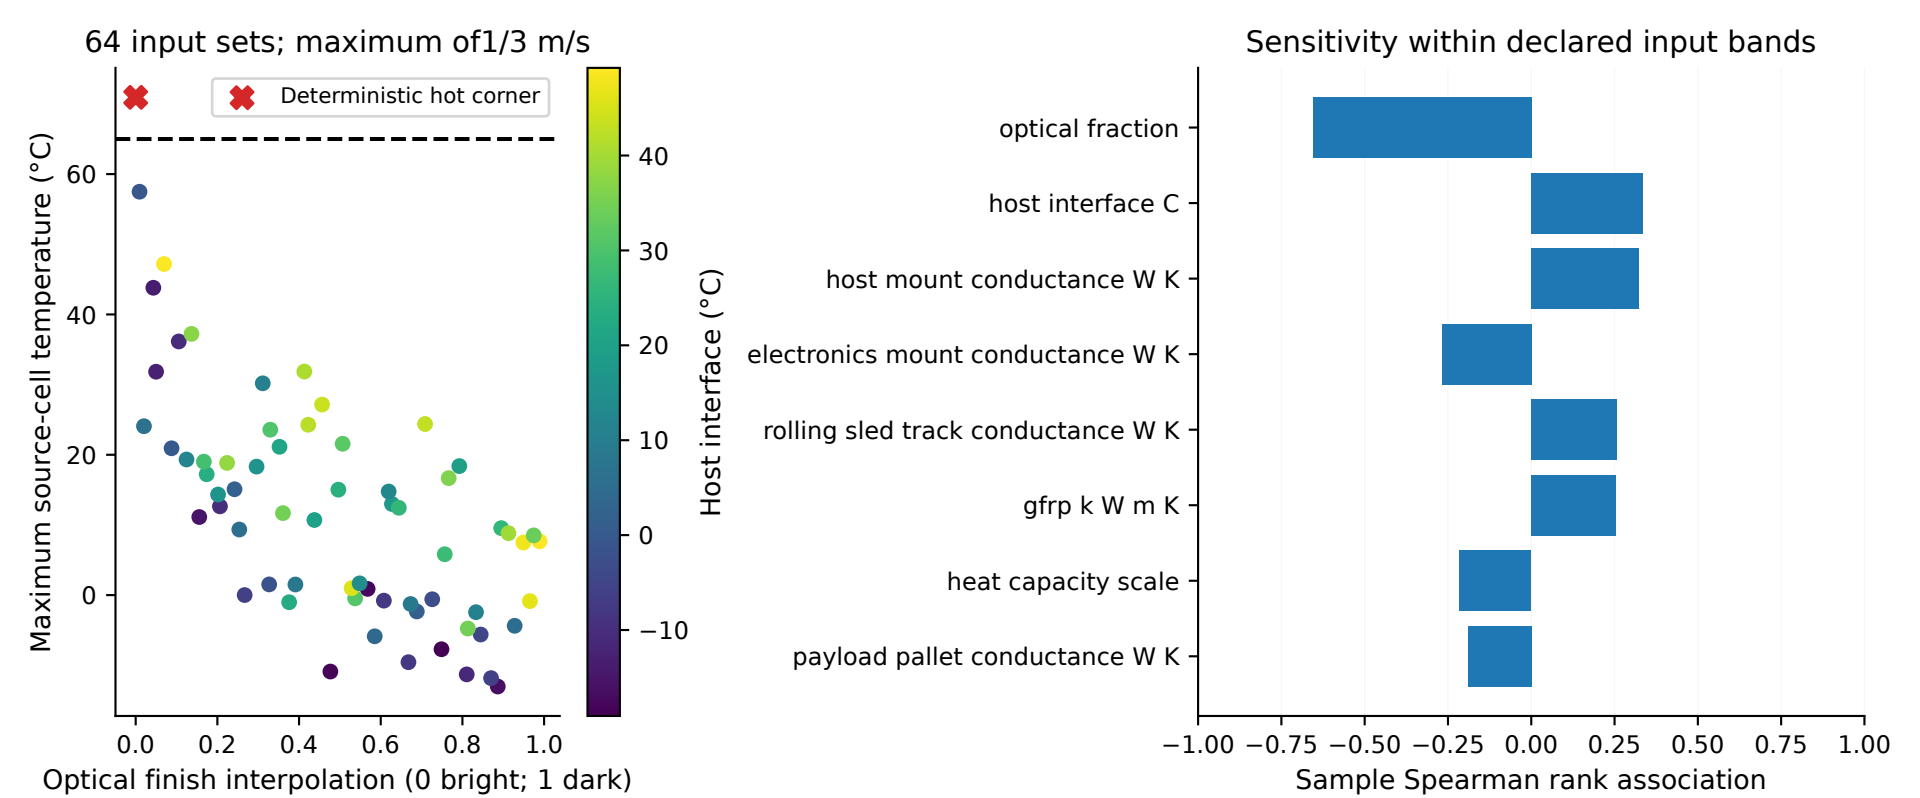
64 input sets; maximum of1/3 m/s
Deterministic hot corner
Maximum source-cell temperature (°C)
Optical finish interpolation (0 bright; 1 dark)
Host interface (°C)
Sensitivity within declared input bands
optical fraction
host interface C
host mount conductance W K
electronics mount conductance W K
rolling sled track conductance W K
gfrp k W m K
heat capacity scale
payload pallet conductance W K
Sample Spearman rank association