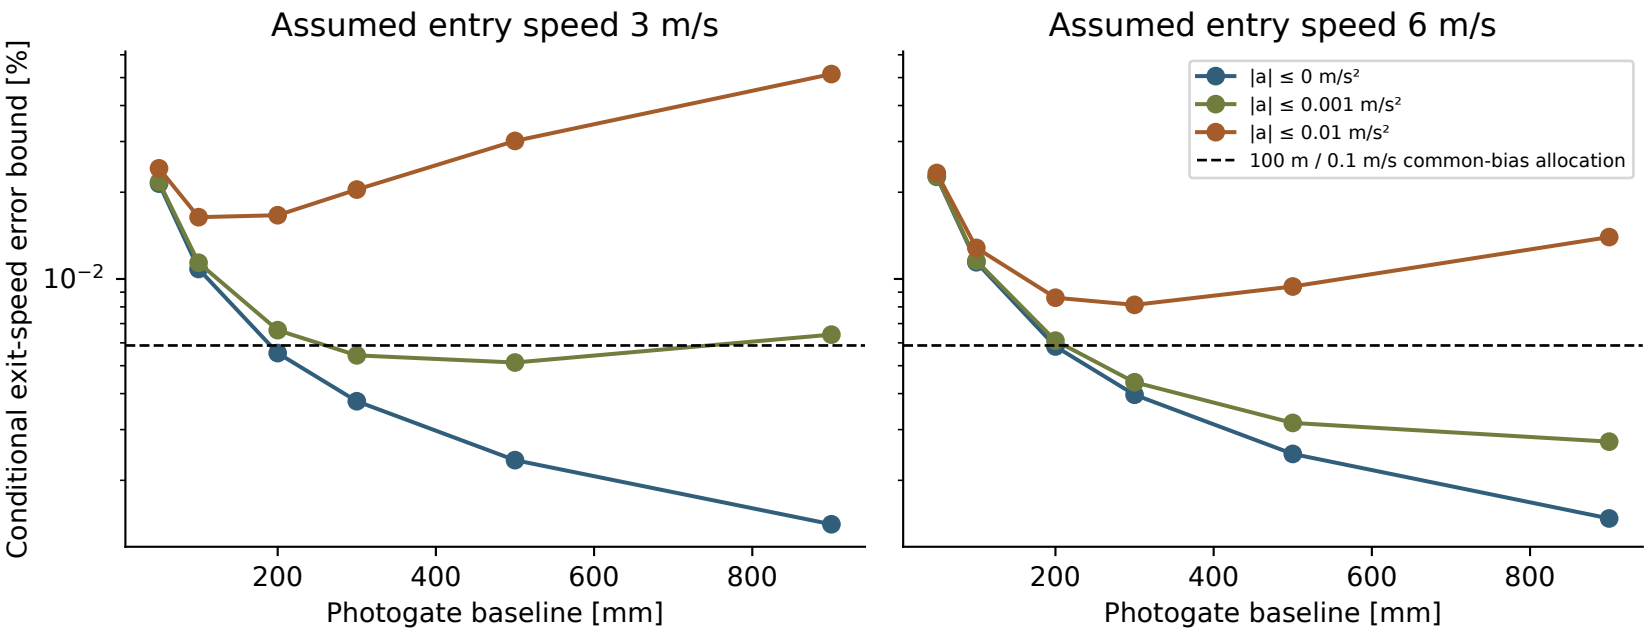
Metrology budget: calibration, timing, thermal drift and mean-to-exit speed
Assumed entry speed 3 m/s
Assumed entry speed 6 m/s
Conditional exit-speed error bound [%]
10^{-2}
200
400
600
800
Photogate baseline [mm]
|a| ≤ 0 m/s²
|a| ≤ 0.001 m/s²
|a| ≤ 0.01 m/s²
100 m / 0.1 m/s common-bias allocation