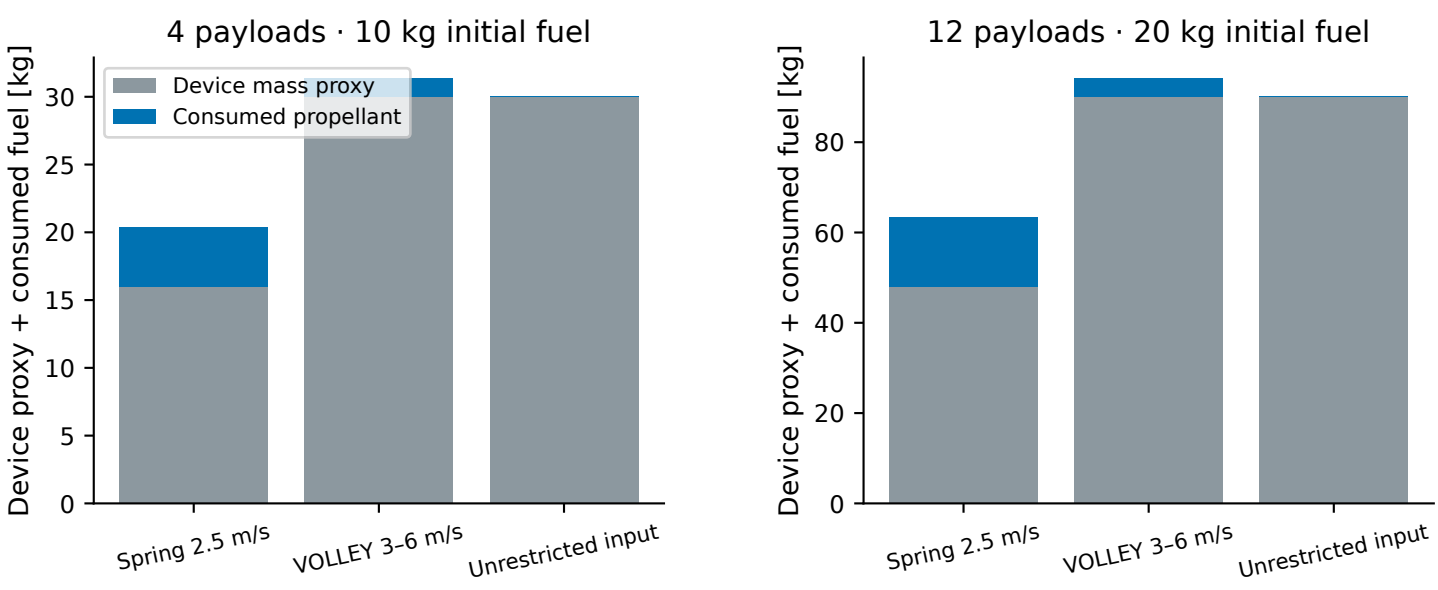

Constructed common-epoch states, ideal host impulses and fixed-axis J2. Device proxies are 16/30 kg per 4 payloads, not a designed installed BOM. Loaded reserves differ between panels; no customer service or commercial advantage proven.