

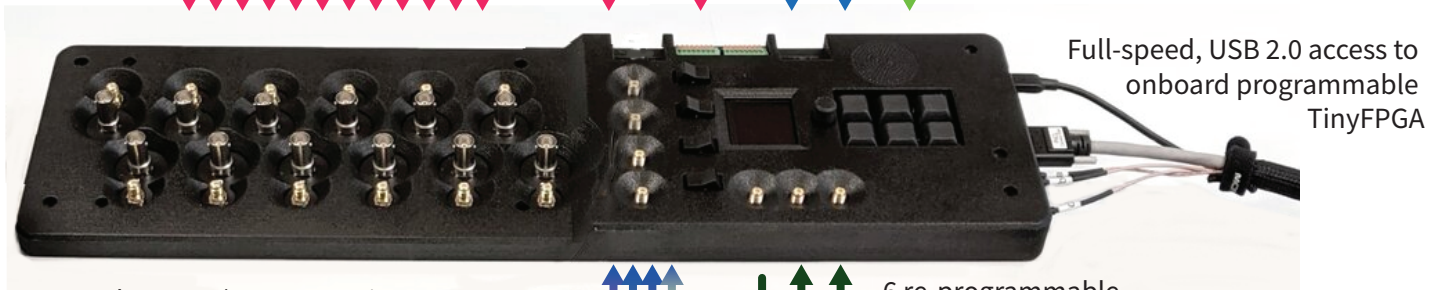


12 bidirectional analog i/o, 100KHz/channel
 Output: $\pm 10V$ range,
 Input: $\pm 10V$, $\pm 5V$, $\pm 2.5V$ selectable

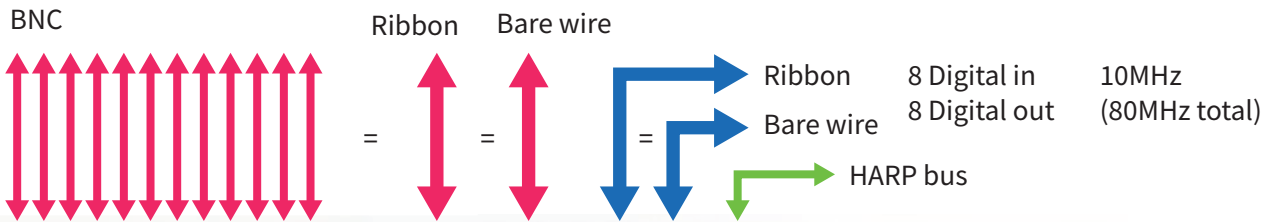

Full-speed, USB 2.0 access to onboard programmable TinyFPGA

Rugged M6 or 1/4-20 mounting compliant with 19" racks and optical tables



4x SERDES headstage ports each with a power switch



2x, passive high-speed clock in
 1x out (support 100's MHz clocks)

6 re-programmable buttons

