Physics Academy

Al-Azhar University - Gaza
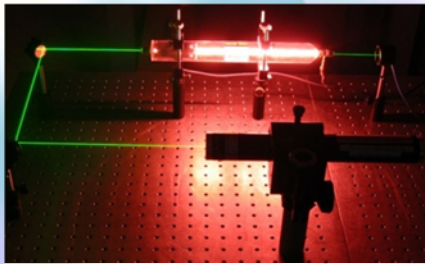
Laser Physics

Round trip gain with losses

Lecture 13

Dr. Hazem Falah Sakeek
www.hazemsakeek.com
www.physicsacademy.org

Round trip gain with losses

درسنا في محاضرات سابقة الحصيلة الناتجة عن دورة كاملة لليزر خلال المادة، وعلمنا أن انقلاب التعداد شرط أساسي لكي يستمر الحصول على ليزر ولكن الفقد الناتج عن عدة عوامل يسبب في نقصان الحصيلة. ولكي نحصل على ليزر فإن الحصيلة لكل دورة يجب أن تكون على الأقل كبر من الخسارة في كل دورة. في هذه المحاضرة سنركز على العلاقة بين الحصيلة والخسارة.

The total losses of the laser system is due to a number of different processes these are:

1. **Transmission at the** mirrors
2. **Absorption and scattering by the** mirrors
3. **Absorption in the laser** medium
4. **Diffraction losses at the** mirrors

All these losses will contribute to reduce the effective gain coefficient to $(\gamma_o - k)$

Round trip Gain (G)

Figure below show the round trip path of the radiation through the laser cavity. The path is divided to sections numbered by 1-5, while point "5" is the same point as "1".

Round trip path of the radiation through the laser cavity.

By definition, **Round trip Gain** is given by:

$$G = I_5 / I_1$$

G = Round trip Gain.
I_1 = Intensity of radiation at the beginning of the loop.
I_5 = Intensity of radiation at the end of the loop.

Dr. Hazem Falah Sakeek

3

Gain (G) Without Losses

From <u>lecture (9)</u> we found that the intensity after one round trip is given by the equation

$$I_5 = R_1 * R_2 * G^2 * I_1$$

Dr. Hazem Falah Sakeek

4

Gain (G) With Losses

We assume that the losses occur **uniformly along the length of the cavity (L)**. In analogy to the Lambert formula for losses, we define loss coefficient (α), and using it we can define **absorption factor k:**

$$k = \exp(-2\alpha L)$$

k = Loss factor, describe the relative part of the radiation that remain in the cavity after all the losses in a round trip loop inside the cavity.

All the losses in a round trip loop inside the cavity are **1-k** (always less than 1).

α = **Loss coefficient** (in units of 1 over length).
2L = Path Length, which is twice the length of the cavity.

Dr. Hazem Falah Sakeek

5

Adding the loss factor (k) to the equation of I_5:

$$I_5 = R_1 * R_2 * G_A^2 * I_1 * k$$

From this we can calculate the **round trip gain:**

$$G = I_5/I_1 = R_1 * R_2 * G_A^2 * k$$

As we assumed uniform distribution of the loss coefficient (α), we now define **gain coefficient (γ)**, and assume **active medium gain (G_A)** as distributed uniformly along the length of the cavity.

$$G_A = \exp(+\gamma L)$$

$$G(\nu) = e^{\gamma_o(\nu)l}$$

Substituting the last equation in the Loop Gain:

$$k = \exp(-2\alpha L)$$

$$G = R_1 * R_2 * \exp(2(\gamma-\alpha)L)$$

Dr. Hazem Falah Sakeek

6

3

$$G = R_1 * R_2 * \exp(2(\gamma-\alpha)L)$$

When the **loop gain (G) is greater than 1 (G > 1)**, the beam intensity will *increase* after one return pass through the laser.

When the **loop gain (G) is less than 1 (G < 1)**, the beam intensity will *decrease* after one return pass through the laser. laser oscillation decay, and no beam will be emitted.

Conclusion:

There is a threshold condition for amplification, in order to create oscillation inside the laser.

This Threshold Gain is marked with index "th".
For continuous laser , the threshold condition is:

$$G_{th} = 1$$

$$G_{th} = 1 = R_1 R_2 G_A^2 k = R_1 * R_2 * \exp(2(\gamma-\alpha)L)$$

Example

Active medium gain in a laser is 1.05. Reflection coefficients of the mirrors are: 0.999, and 0.95. Length of the laser is 30cm. Loss coefficient is: $\alpha = 1.34 * 10^{-4}$ cm^{-1}.

Calculate:

1. The loss factor k.
2. The round trip gain G.
3. The gain coefficient (γ).

Solution

1. The loss factor k:

$$k = \exp(-2\alpha L) = \exp[-2(1.34*10^{-4})*30] = 0.992$$

2. The Loop gain G:

$$G = R_1 R_2 G_A^2 k = 0.999*0.95*1.052*0.992 = 1.038$$

Since $G_L > 1$, this laser operates above threshold.

3. The gain coefficient (γ):

$$G = \exp(\gamma L)$$
$$Ln\ G = \gamma L$$

$$\gamma = Ln\ G/L = \ln(1.05)/30 = 1.63*10^{-3}\ [cm^{-1}]$$

The gain coefficient (γ) is greater than the loss coefficient (α), as expected.

Dr. Hazem Falah Sakeek

9

Example

Helium Neon laser operates in threshold condition. Reflection coefficients of the mirrors are: 0.999, and 0.97. Length of the laser is 50 cm. Active medium gain is 1.02.

Calculate:

1. The loss factor k.
2. The loss coefficient α.

Dr. Hazem Falah Sakeek

10

Solution

Since the laser operates in threshold condition, G = 1.
Using this value in the round trip gain:

$$G = 1 = R_1 R_2 G_A^2 k$$

1. The loss factor k:

$$k = 1/(R_1 R_2 G_A^2) = 1/(0.999*0.97*1.02^2) = 0.9919$$

As expected, k < 1.
Since G > 1, this laser operates above threshold.

2. The loss coefficient (α) is calculated from the loss factor:

$$k = \exp(-2\alpha L)$$
$$\ln k = -2\alpha L$$
$$\alpha = \ln k/(-2L) = \ln(0.9919)/(-100) = 8.13*10^{-5}\ [cm^{-1}]$$

Attention:

If the loss factor was less than 0.9919, then G < 1, and the oscillation condition was not fulfilled.

Dr. Hazem Falah Sakeek

11

Example

Reflection coefficients of the mirrors are: 0.999, and 0.95. All the losses in round trip are 0.6%.

Calculate the active medium gain.

Dr. Hazem Falah Sakeek

12

Solution

For finding the active medium gain G_A, the loss factor (k) must be found.

All the losses are 1-k.

$$1-k = 0.006$$
$$k = 0.994$$

Using this value in the threshold loop gain:

$$G_{th} = 1 = R_1 R_2 G_A^2 k$$

$$(G_A)_{th} = 1/sqrt(R_1 R_2 k) = 1/sqrt(0.999*0.95*0.994) = 1.03$$

The active medium gain must be at least 1.03 for creating continuous output from this laser.

Dr. Hazem Falah Sakeek

13

Summary

G = round trip Gain, determines if the output power of the laser will <u>increase, decrease, or remain constant</u>. It include all the losses and amplifications that the beam have in a complete round trip through the laser.

$$G_L = R_1 R_2 G_A^2 k$$

R_1, R_2 = Reflection coefficients of the laser mirrors.
G_A = Active medium gain as a result stimulated emission.
$$G_A = \exp(+\gamma L)$$
γ = Gain coefficient.
L = Active Medium length.

k = Optical Loss Factor in a round trip path in the laser cavity.
$$k = \exp(-2\alpha L)$$
α = Loss coefficient.

Dr. Hazem Falah Sakeek

14

7

Summary

When G = 1, The laser operate in a **steady state mode**, meaning the output is at a constant power. This is the **threshold condition for lasing**, and the **active medium gain** is:

$$(G_A)_{th} = 1/\text{sqrt}(R_1 R_2 k)$$

The **round trip Gain** is:

$$G_L = R_1 * R_2 * \exp(2(\gamma - \alpha)L)$$

Dr. Hazem Falah Sakeek

15