


# BREEZE

## T5 & T8 Surface Luminaire with Glossy Parabolic Louvre and Mirror Cross Blades



**BREEZE 418 B33 9CR**

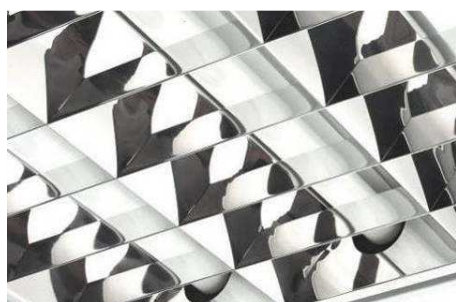

**BREEZE 236 D14**

<b>Type:</b>	Best selling surface mounted T8 luminaire with a modern low profile body and optional number of mirror cross blades. Premium quality at competitive prices.
<b>Specification:</b>	Shiny parabolic louvre with cross blades. Louvre is fitted into the body with a locking safety clip for maximum stability. Nylon retainers enable louvre to swing down for maintenance and tube replacement. Number of cross blades is optional from 5 to 24 for a better glare protection. Fully enclosed painted steel body, wiring is concealed and not visible from ground level. Luminaire is plastic-wrapped and packed in twin boxes.
<b>Installation:</b>	Surface luminaire designed to be fixed to ceiling of any type.
<b>Application:</b>	Indoor. Office buildings, shops and other commercial environments.

Name	Lamp (W) and holder	Overall dimensions (LxWxH), mm	Weight, kg	Total wattage, W
Breeze 218 D13	2x18 (G13)	635x360x66	2,4	42
Breeze 318 M60	3x18 (G13)	635x635x66	3,6	68
Breeze 318 M60 9CR	3x18 (G13)	635x635x66	3,6	68
Breeze 418 B33	4x18 (G13)	635x635x66	3,6	84
Breeze 418 B33 7CR	4x18 (G13)	635x635x66	3,6	84
Breeze 418 B33 9CR	4x18 (G13)	635x635x66	3,6	84
Breeze 418 B33 11CR	4x18 (G13)	635x635x66	3,6	84
Breeze 136 I42	1x36 (G13)	1245x220x66	2,8	42
Breeze 236 I43	2x36 (G13)	1245x220x66	3,3	84
Breeze 158 P12	1x58 (G13)	1545x220x66	4	67
Breeze 236 D14	2x36 (G13)	1245x360x66	4	84
Breeze 258 O40	2x58 (G13)	1545x360x66	5,5	134
Breeze 436 G76	4x36 (G13)	1245x635x66	7	168

Name	Lamp (W) and holder	Overall dimensions (LxWxH), mm	Weight, kg	Total wattage, W
Breeze 214 F33	2x14 (G5)	635x360x66	2,2	31
Breeze 224 F34	2x24 (G5)	635x360x66	2,2	49
Breeze 314 J63	3x14 (G5)	635x635x66	2,8	46
Breeze 314 J63 9CR	3x14 (G5)	635x635x66	2,8	46
Breeze 324 J64	3x24 (G5)	635x635x66	2,9	73
Breeze 324 J64 9CR	3x24 (G5)	635x635x66	2,9	73
Breeze 414 F35	4x14 (G5)	635x635x66	2,9	62
Breeze 414 F35 9CR	4x14 (G5)	635x635x66	2,9	62
Breeze 424 F36	4x24 (G5)	635x635x66	3	98
Breeze 424 F36 9CR	4x24 (G5)	635x635x66	3	98
Breeze 128 J89	1x28 (G5)	1245x220x66	2,5	30
Breeze 154 J90	1x54 (G5)	1245x220x66	2,5	58
Breeze 228 J91	2x28 (G5)	1245x220x66	2,5	60
Breeze 254 J92	2x54 (G5)	1245x220x66	2,5	116
Breeze 135 P08	1x35 (G5)	1545x220x66	3	38
Breeze 149 P09	1x49 (G5)	1545x220x66	3	52
Breeze 235 P10	2x35 (G5)	1545x220x66	3	75
Breeze 249 P11	2x49 (G5)	1545x220x66	3	104
Breeze 228 F37	2x28 (G5)	1245x360x66	3,3	60
Breeze 254 F38	2x54 (G5)	1245x360x66	3,3	116
Breeze 235 O41	2x35 (G5)	1545x360x66	4	75
Breeze 249 O42	2x49 (G5)	1545x360x66	4	104
Breeze 280 O43	2x80 (G5)	1545x360x66	4,1	170
Breeze 428 F39	4x28 (G5)	1245x360x66	3,6	120
Breeze 454 F40	4x54 (G5)	1245x360x66	3,6	229
Breeze 328 O35	3x28 (G5)	1245x635x66	5,7	90
Breeze 354 O36	3x54 (G5)	1245x635x66	5,7	115
Breeze 428 O37	4x28 (G5)	1245x635x66	5,8	120
Breeze 454 O38	4x54 (G5)	1245x635x66	5,8	229
Breeze 628 P06	6x28 (G5)	1245x635x66	6	180
Breeze 654 P07	6x54 (G5)	1245x635x66	6	344

#### Options available on request:

HF-	High Frequency control gear
DIM-	Dimmable ballast
SDIM-	Switch-control/dimming
DALI-	DALI ballast
EMG-	Emergency version 1 hour
EM3-	Emergency version 3 hours
5TB-	5 way terminal block for loop feed and ease of wiring
MAT-	Matted reflector
MBL-	Matted cross blades
7CR-	Louvre with 7 cross blades
9CR-	Louvre with 9 cross blades
11CR-	Louvre with 11 cross blades
24CR-	Louvre with 24 cross blades (2x36/28/54W)
NCP-	Low Power Factor
RIB-	Ribbed cross blades

#### BREEZE 418 B33 HF

