


CABINET LED

Slim LED Batten with Opal Diffuser



Type:	A range of slim LED battens with a plastic diffuser for fast continuous mounting installation.
Specification:	Opal diffuser and end caps made of UV stabilized polycarbonate. White polycarbonate body with switch on/off button. Luminaire is plastic-wrapped and boxed individually.
Installation:	Surface luminaire designed to be fixed to ceiling and walls of any type. Effective solution for interconnecting a number of battens.
Application:	Indoor. Ideal for furniture, retail, industrial and educational applications.

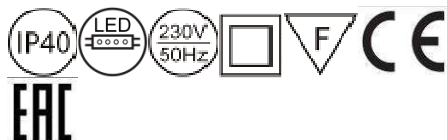

Luminaires can be connected into one continuous line without gaps and light shadows.



Supplied with start lead (10cm), interconnecting part and wall & ceiling mounting kit for easy installation. Switch on/off button mounted on the side of the body.
Optional: 15 cm flexible connector and 70 cm power cable with plug available on request.

Name	Overall dimensions (LxWxH), mm	Lifetime	Luminaire output*, lm Ta=25°C	System power*, W	CRI (Ra)	CCT, K	Weight, kg
Cabinet LED1x640 B838 T830 OP	573x22x30	30000	640	8	80+	3000	0,27
Cabinet LED1x800 B839 T830 OP	873x22x30	30000	800	10	80+	3000	0,42
Cabinet LED1x1120 B840 T830 OP	1173x22x30	30000	1120	14	80+	3000	0,51
Cabinet LED flexible connector 15cm							
Cabinet LED power cable 70cm with plug							

* Tolerance range for optical and electrical data: ±10 %