

RC Baja Car

By

Alex Amadio
Team member:
Federico Berrospe

ABSTRACT

Contents

ABSTRACT.....	2
1. INTRODUCTION.....	8
a. Description	8
b. Motivation.....	8
c. Function Statement.....	8
d. Requirements.....	8
e. Engineering Merit	9
f. Scope of Effort	9
g. Success Criteria	9
h. Stakeholders	9
2. DESIGN & ANALYSIS	10
a. Approach: Proposed Solution	10
b. Design Description	10
c. Benchmark.....	11
d. Performance Predictions	11
e. Description of Analysis.....	11
f. Scope of Testing and Evaluation.....	11
g. Analysis.....	11
i. Analysis 1 – Structural Deflection and Weight on Wheels	12
ii. Analysis 2 – Torsional Shear, angle of rotation due to torque, Driveshaft Diameter and Critical Speed Frequency	12
iii. Analysis 3 – Chassis Deflection due to 15 mph impact.....	12
iv. Analysis 4 – Actual RPM and Gear Reduction.....	12
v. Analysis 5 – Motor Power and Friction on wheels	13
vi. Analysis 6 – Damage Factor and Number of Cycles over time	13
vii. Analysis 7 – Deflection of Driveshaft during a 15-mph impact	13
viii. Analysis 8 – Chassis vibration at 15 mph	13
ix. Analysis 9 – Motor torque needed for acceleration.....	14
x. Analysis 10 - Frag Force at operational speeds	14
h. Device: Parts, Shapes, and Conformation	15
i. Device Assembly	15

j. Technical Risk Analysis	15
k. Failure Mode Analysis	15
l. Operation Limits and Safety.....	15
3. METHODS & CONSTRUCTION	16
a. Methods	16
i. Process Decisions	16
b. Construction.....	16
i. Description	17
ii. Drawing Tree, Drawing ID's.....	18
iii. Parts.....	18
Fall:.....	18
iv. Manufacturing Issues	18
Fall:.....	18
Winter:	18
v. Discussion of Assembly	19
4. TESTING.....	20
a. Introduction	20
b. Method/Approach	20
c. Test Process.....	20
d. Deliverables.....	20
5. BUDGET.....	21
a. Parts	21
b. Outsourcing.....	21
c. Labor.....	21
d. Estimated Total Project Cost.....	21
e. Funding Source.....	21
f. Winter Updates.....	21
g. Spring Updates	21
6. SCHEDULE	22
a. Design.....	22
b. Construction.....	22
c. Testing	22
7. PROJECT MANAGEMENT	23

a. Human Resources	23
b. Physical Resources	23
c. Soft Resources	23
d. Financial Resources.....	24
8. DISCUSSION.....	25
a. Design.....	25
b. Construction.....	25
c. Testing	26
9. CONCLUSION.....	27
a. Design.....	27
b. Construction.....	27
c. Testing	27
10. ACKNOWLEDGEMENTS	28
References	29
APPENDIX A - Analysis.....	30
Appendix A01 – Structural Deflection & Weight on Wheels	30
Appendix A01 – Structural Deflection & Weight on Wheels Cont. (2)	31
Appendix A01 – Structural Deflection & Weight on Wheels Cont. (3)	32
Appendix A02 – Torsional Shear, angle of rotation due to torque, Driveshaft Diameter and Critical Speed Frequency	33
Appendix A02 – Torsional Shear, angle of rotation due to torque, Driveshaft Diameter and Critical Speed Frequency Cont. (2)	34
Appendix A03 – Chassis deflection due to 15 mph impact	35
Appendix A04 – Drivetrain RPM and Motor-Drivetrain Gear Ratio	36
Appendix A05 – Motor Power and Friction on Wheels at an Incline	37
Appendix A06 – Damage Factor and Number of Cycles Over Time	38
Appendix A06 – Damage Factor and Number of Cycles Over Time Cont. (2)	39
Appendix A07 – Deflection of Driveshaft at 15 mph Impact.....	40
Appendix A07 – Deflection of Driveshaft at 15 mph Impact Cont. (2)	41
Appendix A08 – Chassis Vibration at 15 mph	42
Appendix A08 – Chassis Vibration at 15 mph Cont. (2)	43
Appendix A09 – Motor Torque Needed for Acceleration.....	44
Appendix A10 – Drag Forces on the Car	45

APPENDIX B - Drawings.....	46
Appendix B01 – Drawing Tree	46
Appendix B02 – Drawing Index.....	47
Appendix B03 – AA-10-003 – Top Assembly.....	48
Appendix B04 –AA-10-001 – Drivetrain subassembly	49
Appendix B05 –AA-10-002 – Chassis subassembly.....	50
Appendix B06 – AA-20-001 – Chassis Frame	51
Appendix B07 – AA-20-002 – Drive Shaft	52
Appendix B08 – AA-20-003 – Axle	53
Appendix B09 – AA-20-004 – Motor Mount.....	54
Appendix B10 – AA-20-005 – Battery Mount	55
Appendix B11 – AA-20-006 – Drivetrain Bearing Mount.....	56
Appendix B12 – AA-20-007 – Rear Differential Lower Housing	57
Appendix B13 – AA-20-008 – Rear Differential Cover	58
Appendix B14 – AA-20-009 – Rear Axle	59
Appendix B15 – AA-20-010 – Chassis Aerodynamic Cover.....	60
APPENDIX C – Parts List and Costs	61
APPENDIX D – Budget	62
APPENDIX E - Schedule	63
APPENDIX F – Expertise and Resources	64
Appendix F01 – Drivetrain Decision Matrix.....	64
Appendix F02 – Metal Construction Method Decision Matrix.....	64
Appendix F03 – Plastic Construction Method Decision Matrix	65
Appendix F04 – Chassis Material Selection Decision Matrix	65
APPENDIX G – Testing Report	66
Appendix G1 (Replace with test title here).....	66
Introduction	66
Method/Approach	66
Test Procedure.....	66
Deliverables.....	66
Appendix G1.1 – Procedure Checklist.....	66
Appendix G1.2 – Data Forms	66
Appendix G1.3 – Raw Data	66

Appendix G1.4 – Evaluation Sheet.....	66
Appendix G1.5 – Schedule (Testing)	66
Appendix G2 (Replace with test title here).....	67
Introduction	67
Method/Approach	67
Test Procedure.....	67
Deliverables.....	67
Appendix G2.1 – Procedure Checklist.....	67
Appendix G2.2 – Data Forms	67
Appendix G2.3 – Raw Data	67
Appendix G2.4 – Evaluation Sheet.....	67
Appendix G2.5 – Schedule (Testing)	67
Appendix G3 (Replace with test title here).....	68
Introduction	68
Method/Approach	68
Test Procedure.....	68
Deliverables.....	68
Appendix G3.1 – Procedure Checklist.....	68
Appendix G3.2 – Data Forms	68
Appendix G3.3 – Raw Data	68
Appendix G3.4 – Evaluation Sheet.....	68
Appendix G3.5 – Schedule (Testing)	68
APPENDIX H – Resume.....	69
Objective	69
Skills & Abilities	69
Experience.....	69
Education	70

1. INTRODUCTION

a. Description

This project was chosen to create a vehicle capable of competing in the CWU ASME R/C Baja competition. The project detailed in this proposal will use statics, dynamics, mechanics of materials, and physics calculations to develop an optimal solution for the baja competition. This competition consists of 2 events that include the Slalom-and-Sprint as well as the Baja Competition. This R/C baja car seeks to create a low-cost, radio-controlled vehicle that can compete with success. The following project proposal will include documentation for the design and manufacturing for the drivetrain and chassis of the R/C Baja competition car.

b. Motivation

This project was undertaken with the intention of creating a platform to learn how dynamics apply to vehicles, using this knowledge to develop skills related to R/C inspection and survey tools.

c. Function Statement

For the RC Baja car, the chassis is the support for sub-assembly attachments, as for the Drivetrain, the drivetrain provides torque to the system for motion.

d. Requirements

The Baja RC Car will have the following specifications by the end of the project deadline:

1. Drivetrain assembly must be capable of sustained operation (for 2 minutes) at 20 mph without reaching point of failure.
2. Chassis must deflect less than .6 inches from 15 mph head-on impact.
3. Vehicle weight must be less than 10 pounds.
4. Drivetrain must be able to achieve a maximum speed of 30 mph
5. Drivetrain must be able to provide a minimum 0.2 Nm of torque to the wheels during initial acceleration.
6. Chassis must deflect less than .1 inches from normal due to weight of sub-assemblies.
7. Drivetrain sub-assemblies must be able to deflect from normal .2 inches due to impacts of 15 mph without yielding.
8. Drivetrain must be able to achieve a speed of 10 mph in under 10 seconds
9. Chassis must be capable of withstanding 20-40 Hz vibrations at a speed of 15-20 mph.
10. Drivetrain must be capable of providing torque to climb a 45° ramp.
11. The R/C car must have a drag force lower than 120 lbf when at speeds between 10 mph and 30 mph.

e. Engineering Merit

This project will include calculations using formulas learned from the CWU Mechanical Engineering Technology Program. These calculations include Static calculations for forces acting on the chassis as well as the forces acting on the drivetrain, Dynamics calculations to determine forces acting on the system during impacts, and formulas from mechanics of materials for calculating stresses induced during operation, and physics calculations to determine the torque requirements for achieving minimum and maximum speeds for the success in the competition.

f. Scope of Effort

The scope of this proposal will only include drawing for the design and manufacturing of the Drivetrain and the chassis of the vehicle. All other parts and assemblies will be completed by either the designers' team or purchased through outside means.

g. Success Criteria

The success of the project is determined by how well the R/C vehicle performs during testing and whether the vehicle completes the racing challenges set by the competition board, ie. Slalom-and-Sprint and the Baja competition. The vehicle is to be evaluated based on requirements set by both team members prior to manufacturing. This Project would be deemed successful if the vehicle achieved 2nd place during the Baja competition and achieved a Salam-and-Sprint time of under 7 seconds.

h. Stakeholders

The Stakeholders of this project are as follows:

- Alex Amadio. Team member, designer, and builder.
- Federico Berrospe. Team member, designer, and builder.
- Charles Pringle, Mentor and Instructor.
- John Choi, Mentor and Instructor.
- CWU MET department, providing lab space for manufacturing and prototyping.
- Susan Donahue, donor of the Walter R. Kaminski Memorial scholarship, scholarship granted to Mechanical Engineering students for senior project funding.

2. DESIGN & ANALYSIS


a. Approach: Proposed Solution

The problem this project seeks to solve is the need for an R/C car capable of completing the CWU ASME R/C Baja Competition. A decision matrix was utilized to gain a better understanding of what type of design is best suited to solve this problem. As detailed in Appendix F, the design matrix shows that an all-wheel drive drivetrain is best suited for this type of competition.

During initial brainstorming sessions with partner and peers, it was suggested to use a belt system for the drivetrain as well as a 2-motor configuration, this was later scrapped as it violates the rules and regulations of the R/C Baja competition.

b. Design Description

The current design uses a single central drive shaft that is connected to both the front and rear axle. These are connected using a canted gear that fitted to the shaft of both. These gears will likely be covered by a housing unit, to prevent gears from wearing faster than designed from rocks, dirt, or other debris. The motor will use a similar canted gear system to rotate the central drive shaft; however, the motor will go through a gear reduction as to not shear the pinion gear in the motor, or the gears on the way to the drive shaft.

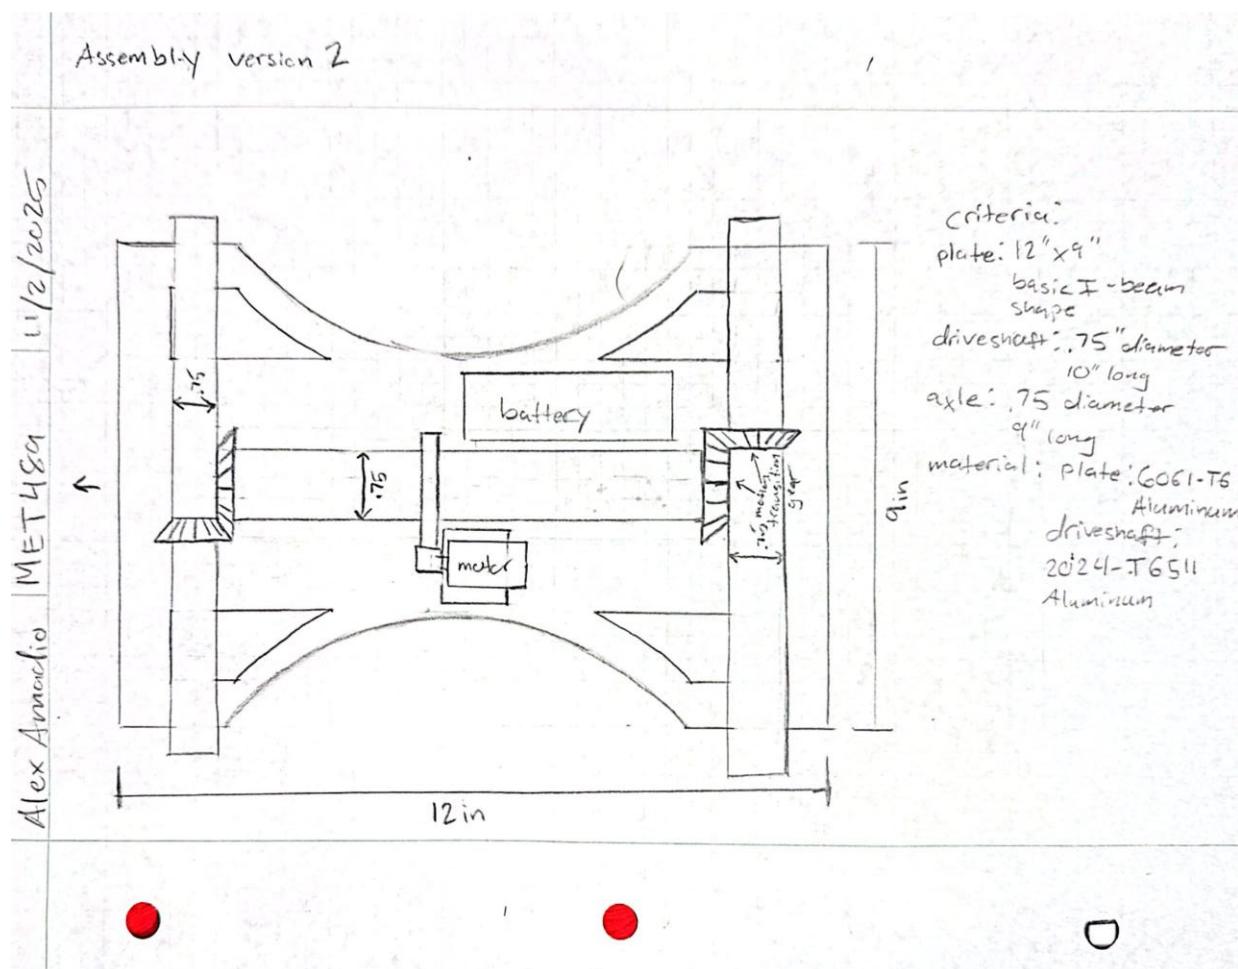

c. Benchmark

This project is benchmarked on an R/C competition car that is commercially available and is sold by TENSSENX, an outdoorsman accessory online retailer. This commercially available vehicle advertises a top speed of 40 mph, a chassis made from aluminum, and a total weight of 1.2 pounds. All these advertisements are within the criteria for success and the requirements set for this project, with the top speed being lower than the benchmarked model.

d. Performance Predictions

Based on calculations done, the R/C car's drivetrain is predicted to provide enough torque to achieve a maximum speed of 30 mph, while maintaining an operational speed of 20 mph. the R/C car is predicted to be able to achieve 2nd place in the Baja competition, and a time of 7 seconds in the slalom-and-sprint.

e. Description of Analysis

The analysis done for this project was completed using formula from the CWU MET statics, to gain an understanding of what the weight on the wheel will be. This understanding allows for a better understanding of what types of wheels are needed to hold the R/C car off the ground. Mechanicals of materials formula are used to better understand what the deflection of the chassis and the drivetrain due to components as well as impacts while at speeds of 15 – 20 mph. Physics and dynamics equations are used to find what the value of torque is acting on the drivetrain during operation, as well as during a cold start. Physics, dynamics, and Mechanical design calculations will also be performed to assess how much torque needs to be produced by the motor to climb a 45-degree ramp. Statics calculations will be used to create Free Body Diagrams to determine the forces on the wheels, through this calculation the proper wheel size can be determined.

f. Scope of Testing and Evaluation

The R/C car will be tested and evaluated for whether it was successful by how it performs during testing in the spring as well as during the R/C Baja Competition held by the CWU ASME chapter. The scope of the testing done for this is by how well the car can handle sharp turns while speeding up and slowing down the motor RPM during the Slalom. The car will also be tested on how well it can go from 0 – 10 mph during the Sprint section of the competition. Finally, the R/C car's drivetrain and chassis will be tested on how well it can handle rough terrain and sudden drops and jumps, during the Baja competition. Testing prior to this will be down to test its ability to climb a 45-degree ramp and how well it performs on subsequent impact.

g. Analysis

The requirements for this project will be met through the manufacturing and selection of components. The manufactured parts are designed using formulas learned through the CWU MET undergraduate program. The engineering merit of this project is to be exemplified using

the CWU: RADD (Requirements, Analysis, Design Parameters, and Documentation) metric. Some of the requirements found in section 1d were calculated using Plate deflection analysis, speed-torque relationship formulas, and Finite Element Analysis. Detailed below are analysis performed to understand what is to be manufactured to achieve requirements found in section 1d.

i. Analysis 1 – Structural Deflection and Weight on Wheels

This analysis is being conducted to satisfy design requirement 1.d.6, for the deflection on the chassis due to component weight. After calculations found in appendix A01, the chassis will deflect 0.00004 inches due to the weight of components. While the weight that the wheels experience is .3286 pounds on each of the front wheels and .3481 pounds on each of the rear wheels. The documentation for this analysis can be found in Appendix A01.

ii. Analysis 2 – Torsional Shear, angle of rotation due to torque, Driveshaft Diameter and Critical Speed Frequency

This analysis was conducted to determine the shear affecting the driveshaft, and the angle of rotation caused by the motor. The torque used for this calculation came from the minimum torque requirements defined in section 1.d.5 compared to the manufacturer's specifications. This analysis also looked at whether the chosen diameter for the drive shaft would break at maximum required speed as defined by Requirement 1.d.4. The shear value was calculated to be 576 lb*in with the angle of twist being 0.0004 degrees. This signifies that the drive shaft will not shear at due to torque from the motor. The drive shaft diameter is .25 inches, with the critical speed being 403513 RPM, this means that the drive shaft would need to spin at 403513 RPM before breaking or bending due to rotation. The critical frequency is 754225 Hz; this signifies that the drive shaft will break after experiencing vibration at the calculated frequency. The documentation for this analysis can be found in Appendix A02.

iii. Analysis 3 – Chassis Deflection due to 15 mph impact

This analysis was conducted to understand how the chassis design would deflect due to a head-on impact going 15 mph. Using deflection of a beam and the Euler's buckling equation. It was found that if the vehicle weighs 3 pounds or less, the chassis will experience a deflection of .599 inches. This analysis satisfies the requirements found in section 1.d.2, however the value is extremely close to being out of spec. The vehicle would need to weigh less than 3 pounds to have this value see a reduction. The documentation for this analysis can be found in Appendix A03.

IV. Analysis 4 – Actual RPM and Gear Reduction

This analysis was conducted to gain an understanding of what RPM is coming from the chosen motor and how that RPM gets transferred to the Drivetrain. This was calculated using torque equations and an assumption of the motor's efficiency. The gear ratio was found using the gear ratio equation. Based on calculations found in Appendix A04, the motor transfers an RPM of 14592 RPM with a motor efficiency of 80%. This is an appropriate estimation of the motor efficiency as this encompasses if the motor is made poorly. For the gear reduction needed to

get the RPM required for a maximum speed of 30 MPH, with 4-inch diameter tires, would be a minimum of a 5-to-1 gear reduction. This means that for every 5 rotations from the motor the drivetrain would rotate once. This analysis was conducted to satisfy requirements found in 1.D.4. The documentation for this analysis can be found in Appendix A04.

V. Analysis 5 – Motor Power and Friction on wheels

This analysis was conducted to find the power that is generated from the motor during an incline this also looks at how much friction is needed from the wheels to propel up a 45-degree incline ramp. Based on calculations found in Appendix A05, with the use kinematics the friction force that was found is 68.31 pounds, and using power equations the power from the motor was found to be 1556.2 horsepower to go up a 45-degree incline. This satisfies the requirement 10 found in section 1.d. This motor power value is used during later analysis. The documentation for this analysis can be found in Appendix A05.

Vi. Analysis 6 – Damage Factor and Number of Cycles over time

This analysis was conducted to determine if the driveshaft can run continuously over a 2-minute span. This is found as a requirement in section 1.d.1. Using the power from the motor found during Analysis_05, as well as specs from chosen components, the damage factor was found. The damage factor is a ratio between the number of cycles of operation over the number of cycles the part can handle before yielding. Based on calculations found in Appendix A06 as well as standard tables for 2024 Aluminum for number of cycles when related to stress, the number of cycles the drive shaft can handle before yielding is 14000 cycles with the number of cycles over 2 minutes is 5826. This puts the damage factor at .441, this is less than 1 meaning the shaft will not yield during the operational 2 minutes. However, this details 2 minutes at 35 mph, whereas the requirement states that the driveshaft is operation over 2 minutes at 20 mph. This is lower than the calculation for 35 mph, this means that there is less stress affecting the drive shaft at 20 mph, thus significantly increasing the number of cycles before yielding. The documentation for this analysis can be found in Appendix A06.

Vii. Analysis 7 – Deflection of Driveshaft during a 15-mph impact

This analysis was conducted to gain a better understanding of the forcing acting on the driveshaft during a 15-mph impact. This satisfies the requirement 1d_7, that states that the drivetrain must not deflection more than .2 inches during impact. Based on calculations found in Appendix A07, it was found that the drive shaft deflects exactly .2 inches during impact. While this does satisfy the 1d-7 requirement, this doesn't fully account for a safety factor. The documentation for this analysis can be found in Appendix A07.

Viii. Analysis 8 – Chassis vibration at 15 mph

This analysis was conducted to understand what kind of vibration is affecting the chassis while at operational speeds. Found in section 1d-9, the requirement states that the chassis needs to withstand a frequency of 20-40 Hz. After completing analysis 8, calculations found in Appendix A08, it was found that the chassis experiences a frequency of 36 Hz on gravel. This is at the higher end of the frequency range which indicates that the car will vibrate more than needed. This vibration value, however, don't consider suspension from the shocks these values will likely

be 5-7 Hz lower with the consideration of shocks. This analysis satisfies requirement 1d-9. The documentation for this analysis can be found in Appendix A08.

Viii. Analysis 9 – Motor torque needed for acceleration.

This analysis was conducted to understand what the minimum torque that's needed to get to 10 mph within 10 seconds, as stated as a requirement in section 1.d.8. Based on calculations found in Appendix A09, the minimum torque that is needed is 3.538 Nm or about 2.61 lbf. This is significantly under the torque that the motor can produce based on manufacturer's specifications. Based on these calculations and the specifications from the vendor, the motor is judged to be able to produce the minimum torque to be able to accelerate the R/C car to 10 mph within 10 seconds. This analysis satisfies requirement 1.d.8 for being able to reach 10 mph in 10 seconds. The documentation for this analysis can be found in Appendix A09.

X. Analysis 10 - Drag Force at operational speeds

This analysis was conducted to gain a better understanding of the drag force that is affecting the R/C car at different operational speeds. Based on calculations found in Appendix A10, the drag force was found to be 12.33 lbf at 10 mph, 49.34 lbf at 20 mph, and 111.03 lbf at 30 mph. These values are under the acceptable maximum value detailed as a part of requirement 1.d.11. This indicates that with the assumption that the height of the car is 5 inches with the height added by the components, then requirement 1.d.11, for drag values being lower than 120 lbf, is satisfied. The documentation for this analysis can be found in Appendix A10.

h. Device: Parts, Shapes, and Conformation

The design for the car was chosen after completing different analysis of various aspects of the requirements. These aspects use a curved profile to prevent stress concentration from accumulating around joints. The chassis uses a 1-foot-long narrow body to prevent deflection due to components. The chassis uses a safety factor of 1.5, while the drivetrain has a safety factor of 2.

i. Device Assembly

The car uses a selected motor and battery to drive a student-built drivetrain to allow for locomotion, while an entirely student-built chassis provides the support for the entire project to come together. The chassis uses an aluminum frame with points to connect straps for vital components, like the motor housing and battery. The drivetrain uses a shaft with angled gears to convert rotational motion 90 degrees to the axles, to provide torque to the wheels at the same time.

j. Technical Risk Analysis

Some technical risk associated with this project would be around whether the gears for the drivetrain are properly tempered, this would cause a problem during operation if the gear's teeth sheared off rendering the car undrivable. Another technical risk would be around whether the motor has a bad magnet or the motor pinion was bad, this would make the pinion more brittle and susceptible to failure or the magnet would generate the torque needed for the R/C car. The last technical problem would be with the battery, such as if the battery wasn't able to hold a charge or didn't have the advertised voltage output for the motor.

k. Failure Mode Analysis

During operation, the chassis experiences load caused by the weight of component sitting atop the chassis, this was found to not be an issue in analysis01. The drivetrain is more likely to fail during operation. The drivetrain experiences dynamic loads from rotational forces, maximum shear stress generated due to torque from the motor

l. Operation Limits and Safety

For the R/C car, there is a level of safety concern around the drivetrain as this involves objects rotating at high RPMs. If not covered adequately then the drivetrain has a chance for clothing or hair to get caught. This is mitigated by covers that are situated around major gear hubs and around the driveshaft. The covers around gears are to reduce the chance of pinching to occur.

3. METHODS & CONSTRUCTION

a. Methods

This project was designed at CWU to complete the Baja R/C competition at the end of the year. While it is designed at CWU the manufacturing utilizes a mix of machines the student has access to. These machines include a mix of CNC and laser cutting methods for metal components as well as 3D Printing for plastic components. These methods were chosen based on careful consideration using a decision matrix.

i. Process Decisions

The decision matrix used to determine the best possible construction methods are detailed in Appendix F. This decision matrix in Appendix F02, detail mixing laser cutting and CNC methods will produce the best results for all metal components; these components include the chassis and the drive train. As for the Plastic components, Appendix F03 shows that 3D printing is the best choice for this application as it has the best adherence to tolerance as well as availability of the materials. Material selection for the chassis as detailed in Appendix F04, was chosen based on analysis seen in 2g as well as throughout Appendix A. The best possible material was considered from different 3D printed materials as well as aluminum, and Aluminum was chosen for its ideal strength cost and weight.

The laser cut parts will be using an xtools metal fabricator, these parts include the chassis frame and the bearing mounts. A CNC lathe will be utilized to manufacture the driveshaft and the axle components. Finally, 3D printing using a Bambu H2D/X1 carbon will be utilized to fabricate the non-structural components such as the motor mounts, the battery holder, and the covers. One of the main issues that was found during the construction of this project was that this is the first time that some of these tools were being turned on. Due to this a lot of calibration was needed to be done to be able to effectively use the tool to cut to tolerance. This calibration was the only thing that really impeded the construction timeline. Other complications that were noticed during manufacturing was that the frame itself was not perfectly symmetrical. This was noticed after manufacturing for the first time and was needed to be recut.

Another thing that was noticed was after completing the 3D Printing process for AA-20-010, It was noted that the way that the part was initially produced could be redesigned to better optimize how the cover is attached to the chassis frame to better increase stability and make it easier to attach and remove for maintenance. Aside from AA-20-001 not being symmetrical, another complication that needed to be addressed is that the plate needed to be longer to better accommodate the motor being larger than initially estimated, an estimation was used as the product manufacturer did not put the dimensions on the website when purchasing the required part, due to this the frame needed to be extended and as such the analysis associated with AA-20-001 needed to be updated to make sure the frame will continue to perform to requirements in 1d.


b. Construction

i. Description

The construction of the project will be done in multiple parts that correspond to designed parts found in appendix B. Many of these parts will be assembled into subassemblies, such as the front axle assembly, the rear axle differential assembly, and the motor-battery chassis assembly. Gears for each of these assemblies are a purchased part that has been detailed in appendix C. Many of these parts are made from 6061-T6511 Aluminum metal with fixture mounts being made from ABS/PLA plastic. When time is not an issue, parts will be made at the student's personal workshop. However, if time is an issue, then the parts will be made here at CWU. This being the case, however, 3D printed parts will always be made by the student personal 3D printer due to the student having a better understanding of the slicing program needed. As mentioned previously the construction took place in multiple parts, the first part is the purchasing of components like the motor and battery, the second part is the construction of the chassis subassembly to provide a stable platform for the rest of the car to mount to, the third part is the construction of the drivetrain subassembly this will connect to the chassis subassembly to provide locomotion, the final part is the final assembly with the project partners' subassemblies so that the final assembly is a complete and working prototype.

ii. Drawing Tree, Drawing ID's

The following is a subassembly used for the drivetrain of the R/C Baja car. A larger and more full drawing tree can be found in appendix B; this details the entire R/C Baja Car.

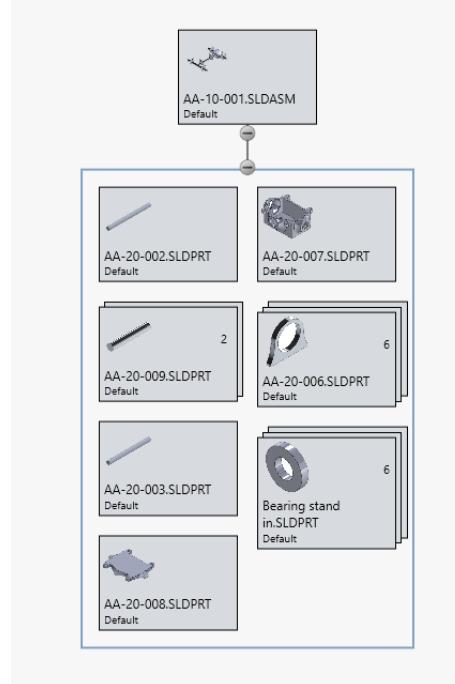

iii. Parts

Fall: to manufacture parts found in appendix B, there were 3 main manufacturing processes that were utilized to build the subassemblies. The first main process is a laser cutting that will use a MetalFab 1200W laser cutter. This is used for the chassis body (AA-20-001) and the bearing mounts (AA-20-006). The next process is the use of a CNC lathe for use on the drive shaft (AA-20-002) and axles (AA-20-003). The CNC lathe is used to keep the shaft and axles as close to circular as possible. The final process group makes use of 3D printing to build the mount components, the battery mount (AA-20-005) and the motor mount (AA-20-004). This process utilizes a Bambu Labs H2D printer to print in ABS/ASA plastic.

Winter:

iv. Manufacturing Issues

Fall: there are a couple of potential risks that can be foreseeable prior to manufacturing. One of the potential risks is learning how to utilize the CNC lathe as well as the laser cutter. Both machines are devices that the student has access to but had never utilized until this project. Another potential risk is the possibility of a print failure while 3D printing. While Bambu labs has a reputation for having a much lower failure rate than competitors, there is always a possibility of a failure, such as if the nozzle temperature is too low for the material or if the print bed needed to be heated.

Winter:

v. Discussion of Assembly

4. TESTING

a. Introduction

The main testing approach will be the R/C Baja Competition held at the end of the year for the CWU ASME chapter. This, however, has multiple race requirements that R/C cars must be able to complete. These include the slalom-and-sprint and the Baja competition. Students will test the R/C cars capabilities on mock tracks as well as on gravel and dirt roads, these tests will simulate the track conditions for the competition. Based on calculations and speed limits set by gear ratios, the R/C car is predicted to perform well during the sprint tests. The car is also predicted to perform well during the Baja portion as values like the natural frequency are calculated for a gravel road.

Outside of the Baja competition testing, the R/C car will undergo various tests that are related to the requirement found in section 1d. Based on calculations found in Appendix A, the car is predicted to perform to specification during the testing methods.

b. Method/Approach

To test the predictions made for the performance of the car, there will be various testing done. A maximum speed test will be used to find requirement 1d-4, this will require a stopwatch and 100 feet of flat land this will determine if the car can reach the maximum specified speed. During the speed test, there will also be an acceleration test that uses the same set-up to determine how long it takes to reach a specified speed, a purchased accelerometer will be used to determine the speeds. A crash test will be used to determine the reliability of the car for requirement 1d-2 and 7, this test will be the most destructive test that the car will undergo and will involve getting the car to 15 mph, determine using the accelerometer, then running into a concrete wall. Data will be collected based on pictures taken with a cellphone camera before the test and after the test, to determine how much deflection the R/C car experiences. A scale will be used to determine the final weight of the car found in 1d-3. Lastly a student-made wooden ramp with a 45-degree incline will be used to determine how well the car can handle inclined surfaces found in 1d-10. The data collected will be how far up the ramp the car goes before slipping, the test would be determined successful if the car makes it up the ramp. This ramp will be made the week prior to the test being completed to allow for adhesive to dry.

c. Test Process

d. Deliverables

5. BUDGET

a. Parts

Parts are to be procured by one of 3 methods, either made in house, purchased from online retailer/warehouse, and made using student's personal workshop. Parts with longer lead times such as the motor and battery are to be ordered during early winter quarter and stored with the rest of the manufactured parts. Parts 20-002 and 20-003 are to be made in house using the CWU machine shop and Part 20-001 and 20-004 are to be made using a laser cutting process at student's personal workshop.

b. Outsourcing

Outsourcing will not be a necessary cost as the student's workshop has the capabilities to perform all processes outside of the need to purchase raw materials and advanced electronic components.

c. Labor

Student's personal hourly rate is \$12/hour as this is the rate for personal or school projects. This estimate is based on the students' estimation of capabilities.

d. Estimated Total Project Cost

This project is estimated to cost about \$800; this estimation includes project partner estimates. Much of the cost is detailed in Appendix C as the motor and battery are a significant portion of the cost. Labor is the second most expensive portion making up about \$300 of the estimated cost.

e. Funding Source

This project is funded by the Kaminski Scholarship Foundation, as well as funding from students' personal funds.

f. Winter Updates

fa:

fb:

fc:

fd:

fe:

g. Spring Updates

ga:

gb:

gc:

gd:

ge:

6. SCHEDULE

a. Design

Fall: This section sees major headway made on the proposal of the project. Analysis is performed to gain a better understanding of what needs to be manufactured and how the Baja Car performs throughout testing. This performance analysis extends to the performance of the Car during the ASME CWU Baja Competition. There were many scheduling conflicts as the component selection for the car took more time than originally expected, this caused some errors to appear during analysis as the weight of certain calculations was slightly off. This was corrected as the component selection was finalized. Time estimates can be found in the provided Gantt chart, found in Appendix E; these time estimates were based on current ability and comprehension. The estimates themselves are close to the indicated values with some analysis taking slightly more or less time, usually by half a day.

Winter: During this time, the design was fully finalized and ready for construction start. Few major design changes occur to reflect current tooling availability. Throughout this project, from fall quarter to spring quarter, the estimated time investment comes out to about 100 hours for the design, conception, and analysis of the R/C car during all quarter. For winter quarter, the estimated time is about 80 hours. This is for the construction, prototyping, and revision of any parts. Lastly for spring quarter, this is estimated to be about 20 hours. This estimation is significantly lower than the other quarters as much of this quarter revolves around testing the car, the competition, and the presentation of the final car to the CWU MET faculty as well as to the SOURCE judges and onlookers.

b. Construction

Fall: Construction is fully planned out as to not have delays. These plans include the time for CNC components and parts that are milled on an engine lathe. These plans also include shipment dates and arrival times for purchased parts, such as the motor and the battery.

Winter: During winter quarter, the construction of the R/C car will begin. This includes the use of engine lathes for the axles and driveshafts as to get within tolerance for roundness, the use of CNC machinery to get the dimensions for the chassis within tolerance.

c. Testing

Fall: The testing for the R/C car is done to test the requirements found in section 1d. The scheduling for these tests is found in Appendix E in the testing section of the Gantt chart.

Spring: These tests will include crash tests for the drivetrain and chassis, Acceleration tests for the drivetrain, as well as any other tests needed for the suspension and steering of the vehicle.

7. PROJECT MANAGEMENT

Throughout this project there were many risks that were undertaken in order to ensure the successful completion of this project. While much of the risk is undertaken during the project, from financial, human, physical, and software resources. There is a level of risk associated with completing the project, this risk comes in the form of losing money to purchased components as the student documenting this proposal chose not to keep the R/C upon completion, it will go to the students' project partner.

a. Human Resources

For the successful completion of this project, there will be many people aside from the Student and the Student's project partner. This includes Professor Charles Pringle, Doctor John Choi, and other CWU MET students and Facility. For project assistance, the student's father, Lou Amadio, will be asked to assist as this individual is the primary owner of many of the machines there are planned to be utilized. The risks with receiving outside assistance are that individuals may not understand the scope of the project and assistance may not be helpful to the completion of the project. Another risk that may come up is scheduling conflicts may occur. The risks will be managed by asking a few days, about 3-4 days, in advance if the students' father is available to keep the workshop open. This advanced notice will be needed for the student as well as the student must commute to the workshop to make use of the resources.

b. Physical Resources

As mentioned prior, there are many machines that are being planned on being used. These include access to a 3D printer (Bambu Labs H2D), A CO2 laser cutter, an all-in-one CNC machine, an all-in-one Lathe, Drill Presses, Engine Lathes, and a metal bender. As many of these machines that are accessible to the student, there is a risk associated with many of these machines, and that is that they are owned by the students' father, therefore meaning that the student may not have access to these machines without prior permission and scheduling. Other physical resources are raw materials such as aluminum sheets and aluminum rods; the risks associated with these items are whether the vendor has it in stock or lead times. Should the risks with physical resources become a hinderance to the success of the project, then the fall back will be the resources and facilities provided by the CWU MET department.

c. Soft Resources

Unlike with physical resources, there are not as many software resources being used. The primary use of software is GitHubs' Jekyll (JECK-uhl) program and Virtual Studio Code (VScode). These programs are employed to code and develop the required webpage deliverable. The biggest risk with this method of webpage development is that troubleshooting must be done by the student. This troubleshooting may incur missed deadlines leading to a delay in schedule. Another piece of software that is being employed is the R/C controller board/program as this is used to be able to control the R/C Baja Car and is vital to the success of the project. The risks with this piece of hard/software are that because it is vital it is also prone to breaking during use or shorting due to contamination. For designing components and drawing tree found in Appendix B, SolidWorks 2025 was utilized. The risks involved with this program are crashes

delaying the design of components and assemblies. Useless saved extensively, there isn't a fix for this type of risk as a crash could occur at any point during the design process.

d. Financial Resources

The project sponsor is committed to providing monetary support for components that cannot be manufactured by the student. This support extends to raw materials, electronics, and tires. The students will also be using their own funds to finance the project should the project go over budget at any point throughout senior year.

8. DISCUSSION

a. Design

Throughout fall quarter, analysis was carried out to get a better understanding of the design parameters that needed to be met or the car to perform to specifications outlined in section 1.

Throughout the fall quarter, the design underwent 2 major redesigns. The first redesign detailed an update to the drive shaft and axles. Based on initial analysis, the driveshaft and axles needed to be .25 inches in diameter to withstand the rotational forces that are acting on the parts. However, later analysis of the lifetime cycles decided that a drive shaft of .25 inches diameter would not be enough to prevent failure. Thus, an increase in diameter was needed. The increase went from .25 inches to .75 inches for the part to withstand a minimum operational time of 2 minutes.

The second major redesign during fall quarter was going back through every part and updating each model to reflect a current process method. This includes updating the battery mount as this part was originally being laser cut and bent from aluminum but after careful consideration, it was decided to 3D Print it from PLA instead. The other redesign is to the bear mount, the cover, and the frame as all the parts originally had no fixture holes to be able to connect everything to the frame.

The last major redesign was to the placement of the drivetrain and the cover; the cover needs to be able to cover all parts and subassemblies. This action is to reduce the drag experienced by the car, hopefully reducing the work needed by the motor to reach specified speeds. The other major redesign was to the placement of the drivetrain system. Initially, this system was to be placed on the underside of the frame to give it enough ground clearance, however this was changed to the top side of the frame because the differential housing was too big for the chosen wheels.

Some risks that needed to be overcome during the design process were that some of the programs being used were crashing, not allowing the proctors to view the webpage after turning it in. The fix that was found for this was to sit down for multiple hours figuring out where the codebase broke, turning out the codebase broke from a single dependency not being updated.

b. Construction

Throughout winter quarter, it was noted that manufacturing the car would be the easiest step of the process. This, however, was the wrong assumption.

During winter quarter the student didn't like how the chassis was originally designed causing a need to completely redesign the chassis frame/body. This setback then raised some concern about the dimensions of the motor; the inclusion of the motor also caused the project to

become out of budget. Due to both the chassis redesign and the budget, a new motor was sought out.

The reason for the chassis redesign is because the original design did not allow for enough clearance for the wheels and suspension to move during operation, which is a basic function for an off-road R/C Car, this was overlooked during the initial design phase.

The redesign of the chassis frames also caused a need to redesign the drivetrain subassembly. Due to this the rear suspension also needed to be redesigned to accommodate, this is done by the project partner. This redesign was started because of overlooking the need for the car to bounce, the original design did not account for this.

During the construction phase of the project, the original parts were produced using a laser cutter, the convenience of having access to a laser allowed for more complex shapes to be produced in relatively short amount of time. This allowed for a short manufacturing timeframe. In addition to laser cutting, the inclusion of 3D-printed parts in materials like PLA or PETG allow for complex shapes that have similar or better stability and strength to cast plastic or vacuum formed plastic.

Something that wasn't helpful with the construction of the project is that the project is being manufactured during winter quarter. During these months, it is significantly more difficult to keep the laser cutter warm enough that the compressed air, that is used for the cutting environment, won't freeze. This freezing leads to an increase in the amount of slag that gets produced on the part that's being cut. This slag also is a result of trying to cut metal that is too large for the machine to handle. Due to the slag build up it increases the production time when removing this slag.

c. Testing

9. CONCLUSION

a. Design

This project serves as the Capstone project for the CWU MET program. The project chosen was an R/C car that is to compete in the ASME CWU chapter Baja Competition. This proposal details the design, construction, and testing of the Chassis and drivetrain components. These components serve a specific purpose to the success of the R/C Baja car, the chassis is the support for sub-assembly attachments, as for the Drivetrain, the drivetrain provides torque to the system for motion. The analysis chosen for these components was chosen based on the design requirements in section 1-d, these analyses include deflection across the chassis, the required torque and gear reduction to reach a specific speed, and the torsional shear that is acting on the driveshaft. The analysis contributes to the success of the project, by providing the minimum requirements for the purchased parts and constructed components. These analyses were performed using formulas learned through the CWU MET program such as statics formulas for determining the deflection on the chassis, dynamics to understand the forces acting on the car during impacts, and physics to understand the minimum acceleration for launching. Resources needed for this project to be successful are easily accessible by way of the student personal workshop as well as through online vendors who provide access to commonly used metals and 3D-printing materials. To determine whether this project was a successful senior project or not the car will undergo a series of testing that was defined by the student, such as a crash test, acceleration test, max speed test, and an endurance test. The car will also compete in the ASME CWU Baja competition that is held during the spring quarter and it will be determined to be successful if the car finishes the race in 2nd place during the Baja competition and 7 seconds or less in the Slalom-and-Sprint race.

b. Construction

c. Testing

10. ACKNOWLEDGEMENTS

References

APPENDIX A - Analysis

Appendix A01 – Structural Deflection & Weight on Wheels

Alex Amadio	M = 1484	10/6/2025	2/3
<p>Analysis 02: Structural given, $D_{\text{alum}} = 2.7 \text{ g/cm}^3$ (based on initial assumptions) battery weight: 196g subject to change weight of 2 motor: 0.4816 -> 0.218 Kg</p> <p>find: force on wheels (end points) deflection due to</p> <p>assume: equilibrium perfect square plate equal distribution of components</p> <p>method: static/moment equations Navier's Double-Sine Expansion Rayleigh-Ritz single term worked estimate</p> <p>solutions:</p> $w(x,y) = \sum_{m=1}^{\infty} \sum_{n=1}^{\infty} w_{mn} \sin\left(\frac{m\pi x}{a}\right) \sin\left(\frac{n\pi y}{b}\right)$ $w_{mn} = \frac{Q_{mn}}{D\left(\left(\frac{m\pi}{a}\right)^2 + \left(\frac{n\pi}{b}\right)^2\right)^2}$ $w_{\max} = \frac{Q_{eq}}{D\pi^4\left(\frac{1}{a^2} + \frac{1}{b^2}\right)}$ <p>bending strain energy</p> $U = \frac{D}{2} \int_0^a \int_0^b (\nabla^2 w)^2 dx dy$ $U = D\pi^4 \left(\frac{1}{a^2} + \frac{1}{b^2}\right) ab w^2$ <p>work done by load</p> $V = \int_0^a \int_0^b q w dx dy = q W \frac{ab}{4}$ $W_{\max} = \frac{q_{eq}}{D\pi^4 \left(\frac{1}{a^2} + \frac{1}{b^2}\right)}$ <p>$Q_{eq} = \frac{P_c + 2P}{ab}$ P_c = weight from battery P = weight from motors $a = 12$ $D = \frac{Et^2}{12(1-\nu^2)}$ E = young's modulus t = thickness ν = poisson's ratio</p>			

Appendix A01 – Structural Deflection & Weight on Wheels Cont. (2)

Alex Amadio | MET 489 | 10/6/2025 | 2/3 -

Solution cont.:

$$\omega_{\max} = \frac{E_{eq}}{D\pi^4 \left(\frac{1}{a^2} + \frac{1}{b^2} \right)^2}$$

$$E_{eq} = \frac{P_c + 2p}{ab}$$

$$D = \frac{Et^3}{12(1-\nu)^2}$$

$$\nu = 0.33 \text{ (Aluminum 6061-T6)} \quad P_c = 196 \text{ kg} \cdot 9.81 = 1922.76 \text{ N}$$

$$E = 69 \text{ GPa} \rightarrow 69.0 \times 10^9 \quad p = .218 \cdot 9.81 = 2.13858 \text{ N}$$

$$a = 12'' \times 0.0254 \rightarrow 0.3048 \text{ m}$$

$$b = 9'' \times 0.0254 \rightarrow 0.2286 \text{ m}$$

$$t = 0.125'' \times 0.0254 \rightarrow 0.0003175 \text{ m}$$

$$D = \frac{(69.0 \times 10^9 \text{ Pa})(0.0003175 \text{ m})^3}{12(1-0.33)^2} = 1291.24$$

$$E_{eq} = \frac{P_c \times ((2)(p))}{0.3048 \cdot 0.2286} = 118.03$$


$$\omega_{\max} = \frac{118.03}{(1291.24)\pi^4 \left(\frac{1}{0.3048^2} + \frac{1}{0.2286^2} \right)^2} = 0.00060105 \text{ m} \rightarrow 0.0000413 \text{ in}$$

the chassis will deflect 0.0000413 in due to weight of proposed components at $\frac{1}{8}$ thickness

Appendix A01 – Structural Deflection & Weight on Wheels Cont. (3)

Alex Amadio | MET 489 | 10/6/2025 | 3/3

solution cont.:

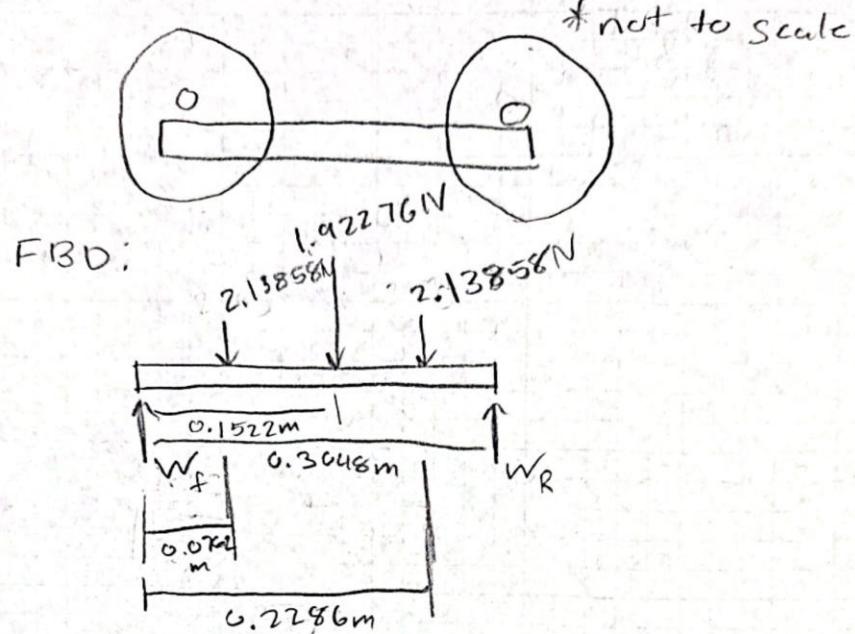

$$\sum F_x = 0 = W/A$$

$$\sum F_y = 0 = W_f + W_R - 2.13858 - 1.92276 - 2.13858$$

$$\begin{aligned} \sum M_{w_f} = 0 = & (2.13858N)(0.0762m) + (1.92276N)(0.1522m) \\ & + (2.13858N)(0.2286m) - (W_R)(0.3048m) \end{aligned}$$

$$W_R = \frac{0.9445N \cdot m}{0.3048m} = 3.0987N$$

$$W_R = 3.0987N \times 0.22481 \text{ lbs} \quad W_R = 0.6966 \text{ lbs}/2$$

$$0 = W_f + 3.0987 - (2)(2.13858) - 1.92276$$

$$W_f = 3.10122N \rightarrow 0.22481 \text{ lbs} \quad W_f = 0.6971 \text{ lbs}/2$$

the wheels currently experience 0.3486 lbs on both of the front wheels and 0.3481 lbs on both back wheels

Appendix A02 – Torsional Shear, angle of rotation due to torque, Driveshaft Diameter and Critical Speed Frequency

Alex Amadio	MET 489	10/12/2025	9/2
<p>Analysis 02:</p> <p>given: $\rho = 0.0975 \text{ lb/in}^3$, $G = 11.5 \times 10^6 \text{ psi}$ $L = 10 \text{ in}$ $E = 10 \times 10^6 \text{ psi}$ $T = .1475 \text{ lb/in}^2 \text{ (from motor specs)} \rightarrow 1.77 \text{ lb/in}$</p> <p>find:- shear stress on drivetrain before gear-reduction - Drivetrain diameter to withstand 30 MPH</p> <p>assume: 3in dia wheels gear reduction down to a torque of 1.77 lb/in</p> <p>method: shear stress analysis critical speed analysis</p> <p>Solution:</p> $\tau = \frac{T r}{J}$ $\phi = \frac{TL}{JG}$ $\therefore N_{cr} = (4.76 \times 10^6) \frac{r}{L^2} \sqrt{\frac{E}{\rho}}$ $N_{cr} = (4.76 \times 10^6) \frac{125}{10^2} \sqrt{\frac{10 \times 10^6}{0.0975}}$ $N_{cr} = 60257992 \text{ RPM}$ $\omega_c = \frac{N_{op}}{60} = 753225 \text{ Hz}$ $N_{op} = .75(N_{cr}) = 451934 \text{ RPM}$ $\frac{N_{op} \cdot 3}{336} = 403513 \text{ MPH}$ <div style="border: 1px solid black; padding: 5px;"> <p>this means the drive shaft with a diameter of .25 inch will not fail at 30 mph with a critical frequency of 753225 Hz</p> </div>			

Appendix A02 – Torsional Shear, angle of rotation due to torque, Driveshaft Diameter and Critical Speed Frequency
Cont. (2)

Alex Amadio	MET489	10/12/2025	7/2
<p>Solution cont.</p> $\tau = \frac{Tr}{J} = \frac{1.77(1.125)}{J} = 576 \text{ lb/in}$ $\phi = \frac{\tau L}{J G} = \frac{1.77(10 \text{ in})}{J G} = 0.0004024^\circ$ $J = \frac{\pi r^4}{2} = \frac{\pi (.125)^4}{2} = 0.000382495 \text{ in}^4$			

Appendix A03 – Chassis deflection due to 15 mph impact

Alex Annacic MET429 10/14/2025 2/1
find: deflection due to head-on impact
given: $V = 15 \text{ mph}$
$m \approx 3 \text{ pounds} \text{ (based on estimates)}$
$b = 5.2 \text{ in} \text{ (based on drawing in appendix B06)}$
$t = .125 \text{ in}$
$L = 12 \text{ in}$
$E = 10 \times 10^6 \text{ psi}$
$\phi = .25 \text{ in}$
assume: perfectly elastic collision
method: Kinetic energy Deflection
solution:
$\delta_{\max} = \sqrt{\frac{mv^2}{K_{\text{bend}}} = \sqrt{\frac{(3)(15^2)}{1880.74}} = 0.599 \text{ in}}$
$K_{\text{bend}} = \frac{48EI}{L^3} = \frac{48(10 \times 10^6)(0.006770833)}{12^3} = 1880.74$
$I = \frac{bt^3}{12} = \frac{5.2(.125)^3}{12} = .006770833 \text{ in}^4$
$F_{\max} = K\delta = (1880.74)(.599) = 1126.74 \text{ lb}$
at a speed of 15 mph the car will deflect .599 inches with a peak impact force of 1126.74 pounds

Appendix A04 – Drivetrain RPM and Motor-Drivetrain Gear Ratio

Alex Amadio	MET489	10/19/2025	2/1
given: voltage; 7.6V (from Battery specs)			
KV = 2400 (from motor specs)			
wheel $\theta = 4\text{ in}$			
find: RPM and required gear ratio			
assume: no slipping between gears			
80% efficiency			
method: RPM calculations			
Solution:			
$\text{RPM} = (\text{KV})(v)(\eta) = (2400)(7.6)(.80) = \boxed{14592 \text{ RPM}}$			
$\text{MPH} = \frac{\text{RPM} \times (2\pi \theta)}{12 \left[\frac{\text{in}}{\text{foot}} \right] \times 5280 \left[\frac{\text{feet}}{\text{mile}} \right]} = \frac{(14592)(12.57)(60)}{(12)(5280)} = 173.7 \text{ MPH}$			
$C = \pi \theta = \pi(4) = 12.57 \text{ in}$			
173.7 mph with no gear reduction			
gear reduction for target speed of 30 mph			
$G = \frac{N_{\text{motor}}(\pi\theta)}{V_{\text{target}}} = \frac{14592(4\pi)}{1056(30)} = 5.7$			
gear reduction for target speed of 35 mph			
$G = \frac{14592(4\pi)}{1056(35)} = 5$			
$\boxed{G = 5 \text{ with safety in mind}}$			

Appendix A05 – Motor Power and Friction on Wheels at an Incline

Alex Amadio	ME 1489	10/26/2025	7/1
Given:	$N = 2200 \text{ RPM}$	$i = 5$	
	$\emptyset_{\text{diameter}} = 8 \text{ in}$	$g = 32.2 \text{ ft/sec}^2$	
	45° incline	$m = 3 \text{ pounds}$	
	find: motor power and friction on wheels		
	assume: constant torque		
	$\eta = 80\%$		
	method: $P = T\omega$		
	$T = F_{\text{drive}} \times r$		
	Solution:		
C	$\omega = \frac{2\pi N}{60} = \frac{2\pi (2400)}{60} = 251.0 \text{ rad/sec}$		
	$T = \frac{F_{\text{drive}} \times r}{(i)(\eta)} = \frac{(68.3)(.375)}{(5)(.8)} = 6.2 \text{ lb}$		
	$F_{\text{drive}} = mg \cdot \sin \theta = 3(32.2) (\sin 45^\circ) = 68.3115$		
	$\boxed{\text{the wheels need to generate } 68.3115 \text{ of friction}}$		
	$P = 6.2 \times 251.0 \text{ rad/sec} = 1556.2 \text{ hp}$		
	$\boxed{P_{\text{motor}} = 1556.2 \text{ hp to go up a } 45^\circ \text{ incline}}$		

Appendix A06 – Damage Factor and Number of Cycles Over Time

Alex Amadio | MET 489 | 10/26/2025 | 7/2

Given: RPM = $14592/5 = 2918.4$

$$\rho_{\text{alum}} = 2.7 \text{ g/cm}^3 \Rightarrow 0.075 \text{ lb/in}^3$$

$$A = \pi r^2 L = \pi (0.375)^2 (10) = 0.091 \text{ in}^2$$

$$r = 0.375 \text{ in}$$

$$\phi = 0.75$$

$$L = 10 \text{ in}$$

$$P_{\text{motor}} = 490.71$$

Find: The damage factor

assume: perfect horizontal shaft

Doubling Driveshaft Diameter

methods: Miner's Rule

Torsional shear (recalculation)

bending moment

Fig. 5-10

Solution:

$$\omega = \frac{2\pi(2918.4)}{60} = 305.61 \text{ rad/s}$$

$$\omega_c = \rho A r \omega^2 = 0.442 (0.375) (305.61)^2 = 4396.5$$

$$M_{\text{max}} = \frac{\omega c L^2}{8} = \frac{4396.5 \cdot (10)^2}{8} = 54956.25$$

$$\sigma_b = \frac{54956.25 (0.375)}{I} = 468164.24$$

$$I = \frac{\pi (0.375)^4}{4} = 0.0165$$

$$T = \frac{5252 \cdot 1556.25}{14592} = 5241.19$$

Appendix A06 – Damage Factor and Number of Cycles Over Time Cont. (2)

Alex Amadio | MET 484 - | 10/27/2025

Appendix A07 – Deflection of Driveshaft at 15 mph Impact

Alex Amadio	MET 489	11/2/2025	<u>1/2</u>
given:	$d = .75 \text{ inches}$	$V = 15 \text{ mph}$	
	$E = 10 \times 10^6 \text{ psi} \text{ (2024-TG511 Aluminum)}$		
	$L = 10 \text{ "}$		
	$K = 1,0 \text{ (Pinned-pinned)}$		
find:	deflection on driveshaft during 15 mph head		
assume:	perfectly elastic collision pinned-pinned simply supported beam		
method:	Euler critical buckling load slenderness ratio kinetic energy simply supported		
solution:			
	$\tau = \frac{L}{\sqrt{\frac{I}{A}}} = \frac{10}{\sqrt{\frac{.015532}{.44179}}} = 53.3 < 100$		
	$I = \frac{\pi (.75)^4}{64} = 0.015532 \text{ in}^4$		
	$A = \pi (.375)^2 = 0.44179 \text{ in}^2$		
	$P_{cr} = \frac{\pi^2 EI}{(KL)^2} = 15329.47 \text{ psi} \rightarrow 15.33 \text{ ksi}$		
	$F = \frac{\frac{1}{2} m V^2}{s} = \frac{\frac{1}{2} (3)(15)^2}{.2} = 1687$		

Appendix A07 – Deflection of Driveshaft at 15 mph Impact Cont. (2)

Alex Amadid	MET 489	11/2/2025	3/2
solution cont.			
	$\delta_{max} = \frac{1687(10)^3}{48(10 \times 10^6)(I)} = 0.2 \text{ inches}$		
	$\boxed{\delta = 0.2 \text{ inches}}$		
	$1687 < 15329$		
	the driveshaft will not buckle more than 0.2 inches at 15mph		

Appendix A08 – Chassis Vibration at 15 mph

Alex Amadio | MET 489 | 11/2/2025 | 1/2

Given: $V = 15 \text{ mph} \rightarrow 6.7056 \text{ m/s}$

$$d_{\text{wheel}} = 4 \text{ in} \rightarrow 0.1016 \text{ m} \quad \text{z.e. 1}$$

$$b = 9 \text{ in} \rightarrow 0.2286 \text{ m} \quad A_{\text{rod}} = 0.001$$

$$t = 1.25 \text{ in} \rightarrow 0.003175 \text{ m} \quad A_{\text{ground}} = 0.003$$

$$L = 12 \text{ in} \rightarrow 0.3048 \text{ m}$$

$$E = 71 \text{ GPa} \rightarrow 71 \times 10^9 \text{ Pa}$$

$$m = 3 \text{ pounds} \rightarrow 1.360777 \text{ Kg}$$

Find: can the chassis withstand 10 - 30 Hz at 15 mph

assume: Basic oil-filled shock

method: excitation frequency

chassis stiffness

Natural frequency

transmissibility

response Amplitude

Solution:

$$f_{\text{wheel}} = \frac{V}{\pi d} = \frac{6.7056}{\pi (0.1016)} = 21.01 \text{ Hz}$$

$$I = \frac{bt^3}{12} = \frac{0.2286(0.003175)^3}{12} = 6.097 \times 10^{-10}$$

$$K = \frac{48(71 \times 10^9)(6.097 \times 10^{-10})}{(0.3048)^3} = 73378.85$$

$$\delta_n = \frac{1}{2\pi} \sqrt{\frac{73378.85}{1.360777}} = 136.96 \text{ Hz}$$

Appendix A08 – Chassis Vibration at 15 mph Cont. (2)

Alex Amadio	MET U89	11/2/2025	2/2
Solution. cont.			
$r = \frac{\omega_{\text{wheel}}}{\omega_n} = \frac{21.01 \text{ Hz}}{36.96 \text{ Hz}} = 0.57$			
$T(r) = \sqrt{\frac{1 + (2\pi r)^2}{(1 - r^2)^2 + (2\pi r)^2}} = \sqrt{\frac{1 + (2(1))(0.57)^2}{(1 - (0.57)^2)^2 + (2(1))(0.57)^2}}$			
$T(r) = 1.47$			
displacement amplitude			
road			
$x_{\text{response}} = A_{\text{road}} \cdot T(r) = (0.001) \cdot 1.47 = 0.0015 \text{ m}$			
gravel			
$x_{\text{response}} = A_{\text{gravel}} \cdot T(r) = (0.003) \cdot 1.47 = 0.0044 \text{ m}$			

Appendix A09 – Motor Torque Needed for Acceleration

Alex Amadio	MET 489	11/9/2025	2/1
<p>Given: $D = 4 \text{ in}$</p> <p>$t = 10 \text{ seconds}$</p> <p>$V = 10 \text{ mph} \rightarrow \frac{10560}{\pi(4)} = 840 \text{ RPM}$</p> <p>$P_{\text{motor}} = 1556.2 \text{ hp}$</p> <p>$a = 12 \text{ in} \rightarrow .3048 \text{ m}$</p> <p>$b = 9 \text{ in} \rightarrow .2286 \text{ m}$</p> <p>$m = 31 \text{ lbs} \rightarrow 1.36 \text{ kg}$</p> <p>Final: how much torque from motor is needed to reach 10 mph in 10 seconds</p> <p>assume: no slip</p> <p>method:</p> $\omega_f = \text{RPM} \times \frac{2\pi}{60}$ $T = I\alpha$ <p>Solution:</p> $\omega_f = 840 (\text{RPM}) \times \frac{2\pi}{60} = 87.96 \text{ rad/s}$ $\alpha = \frac{87.96 \text{ rad/s}}{10 \text{ sec}} = 8.796 \text{ rad/s}^2$ $I = \frac{m(a^2 + b^2)}{12} = \frac{1.36(.3048^2 + .2286^2)}{12} = 0.0165$ $T = Id = 0.0165 \times 8.796 = 0.145134 \text{ Nm}$ $\omega_{\text{motor}} = 87.96 \times 5 = 439.80 \text{ rad/s}$ $T_{\text{motor}} = \frac{1556.2}{439.80} = 3.538 \text{ Nm}$ <p>motor needs 3.538 Nm to reach 10 mph in 10 seconds</p>			

Appendix A10 - Drag Forces on the Car

Alex Amadio | MET 489 | 11/9/2025

21

Given: $C_d = 0.4$

$$\rho = 0.076417 \text{ lb/ft}^3$$

$$A = 9 \text{ in} \times 5 \text{ in} = 45 \text{ in}^2 \rightarrow 3.75 \text{ feet}^2$$

$$V_1 = 10 \text{ mph} \rightarrow 14.66 \text{ ft/s}$$

$$V_2 = 20 \text{ mph} \rightarrow 29.33 \text{ ft/s}$$

$$V_3 = 30 \text{ mph} \rightarrow 44.00 \text{ ft/s}$$

Find: drag forces

Assume: 5 in height with height of components

Method: drag force equation

Solution:

10 mph:

$$F_d = \frac{1}{2} \rho C_d A V^2$$

$$F_d = \frac{1}{2} (0.076417) (0.4) (3.75) (14.66)^2$$

$$\boxed{F_d = 12.33 \text{ lbf}}$$

20 mph

$$F_d = \frac{1}{2} (0.076417) (0.4) (3.75) (29.33)^2$$

$$\boxed{F_d = 49.34 \text{ lbf}}$$


30 mph:

$$F_d = \frac{1}{2} (0.076417) (0.4) (3.75) (44)^2$$

$$\boxed{F_d = 111.03 \text{ lbf}}$$

APPENDIX B - Drawings

Appendix B01 – Drawing Tree

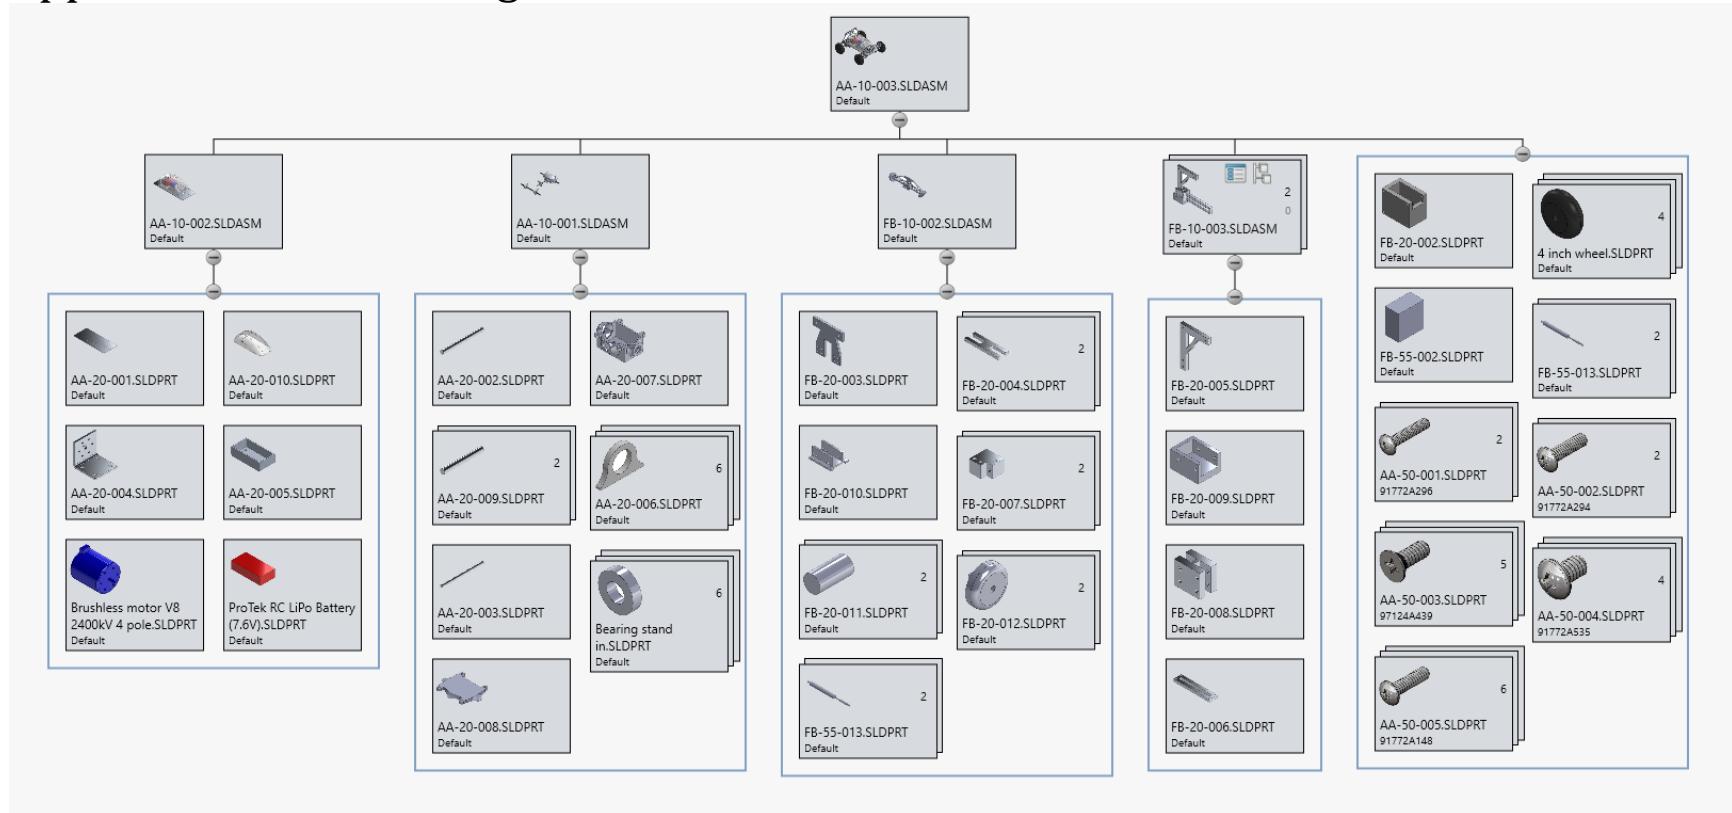


Appendix B02 – Drawing Index


Table B02. Drawing Index

Drawing Assignment Num.	Drawing #(s)	Date submitted
Upload: DWG 1	AA-20-001	10/15/2025
Upload: DWG 2	AA-20-002	10/21/2025
Upload: DWG 3	AA-20-003	10/29/2025
Upload: DWG 4	AA-20-004	10/29/2025
Upload: DWG 5	AA-20-005	11/5/2025
Upload: DWG 6	AA-20-006	11/5/2025
Upload: DWG 7	AA-20-007	11/12/2025
Upload: DWG 8	AA-20-008	11/12/2025
Upload: DWG 9	AA-20-009	11/19/2025
Upload: DWG 10	AA-20-010	11/19/2025
Upload: Subassembly 1	AA-10-001	11/19/2025
Upload: Subassembly 2	AA-10-002	12/5/2025
Upload: Top assembly	AA-10-003	12/5/2025


Appendix B03 – AA-10-003 – Top Assembly

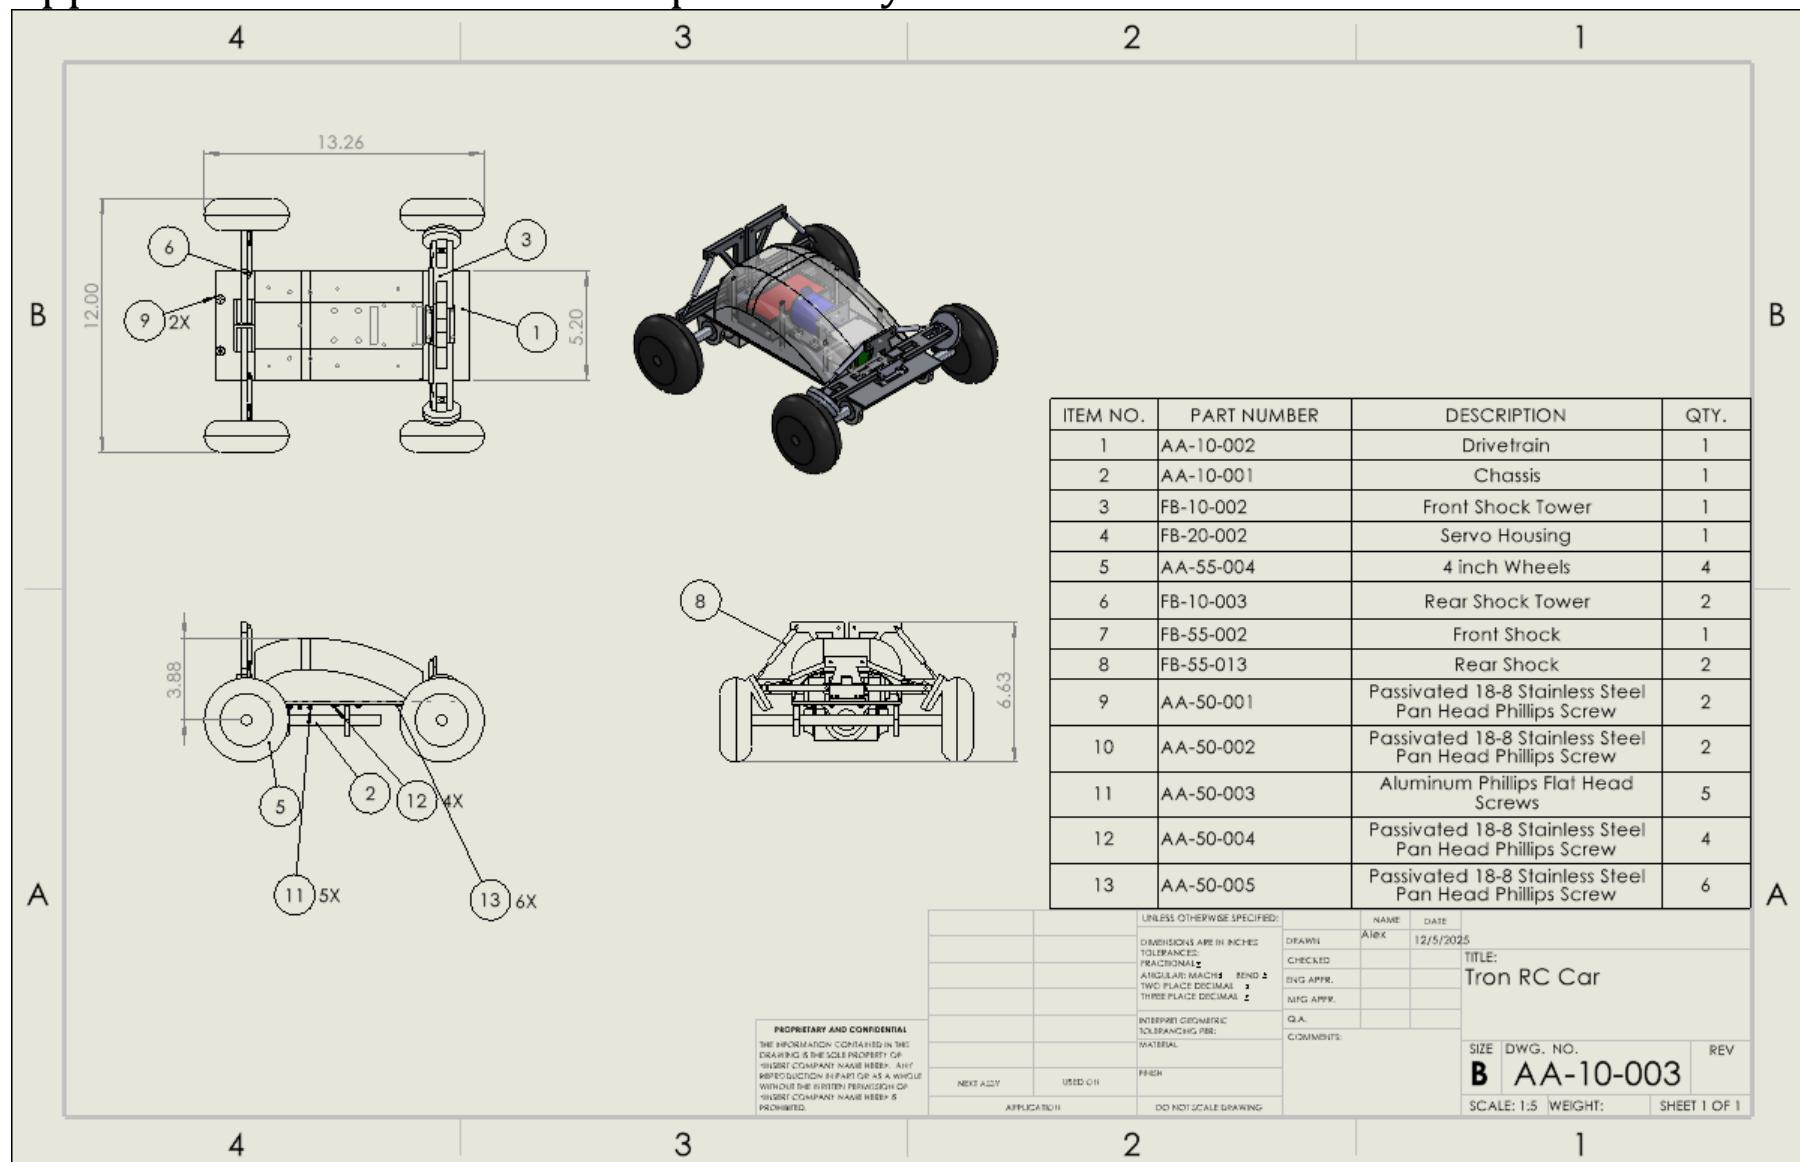


Appendix B04 –AA-10-001 – Drivetrain subassembly

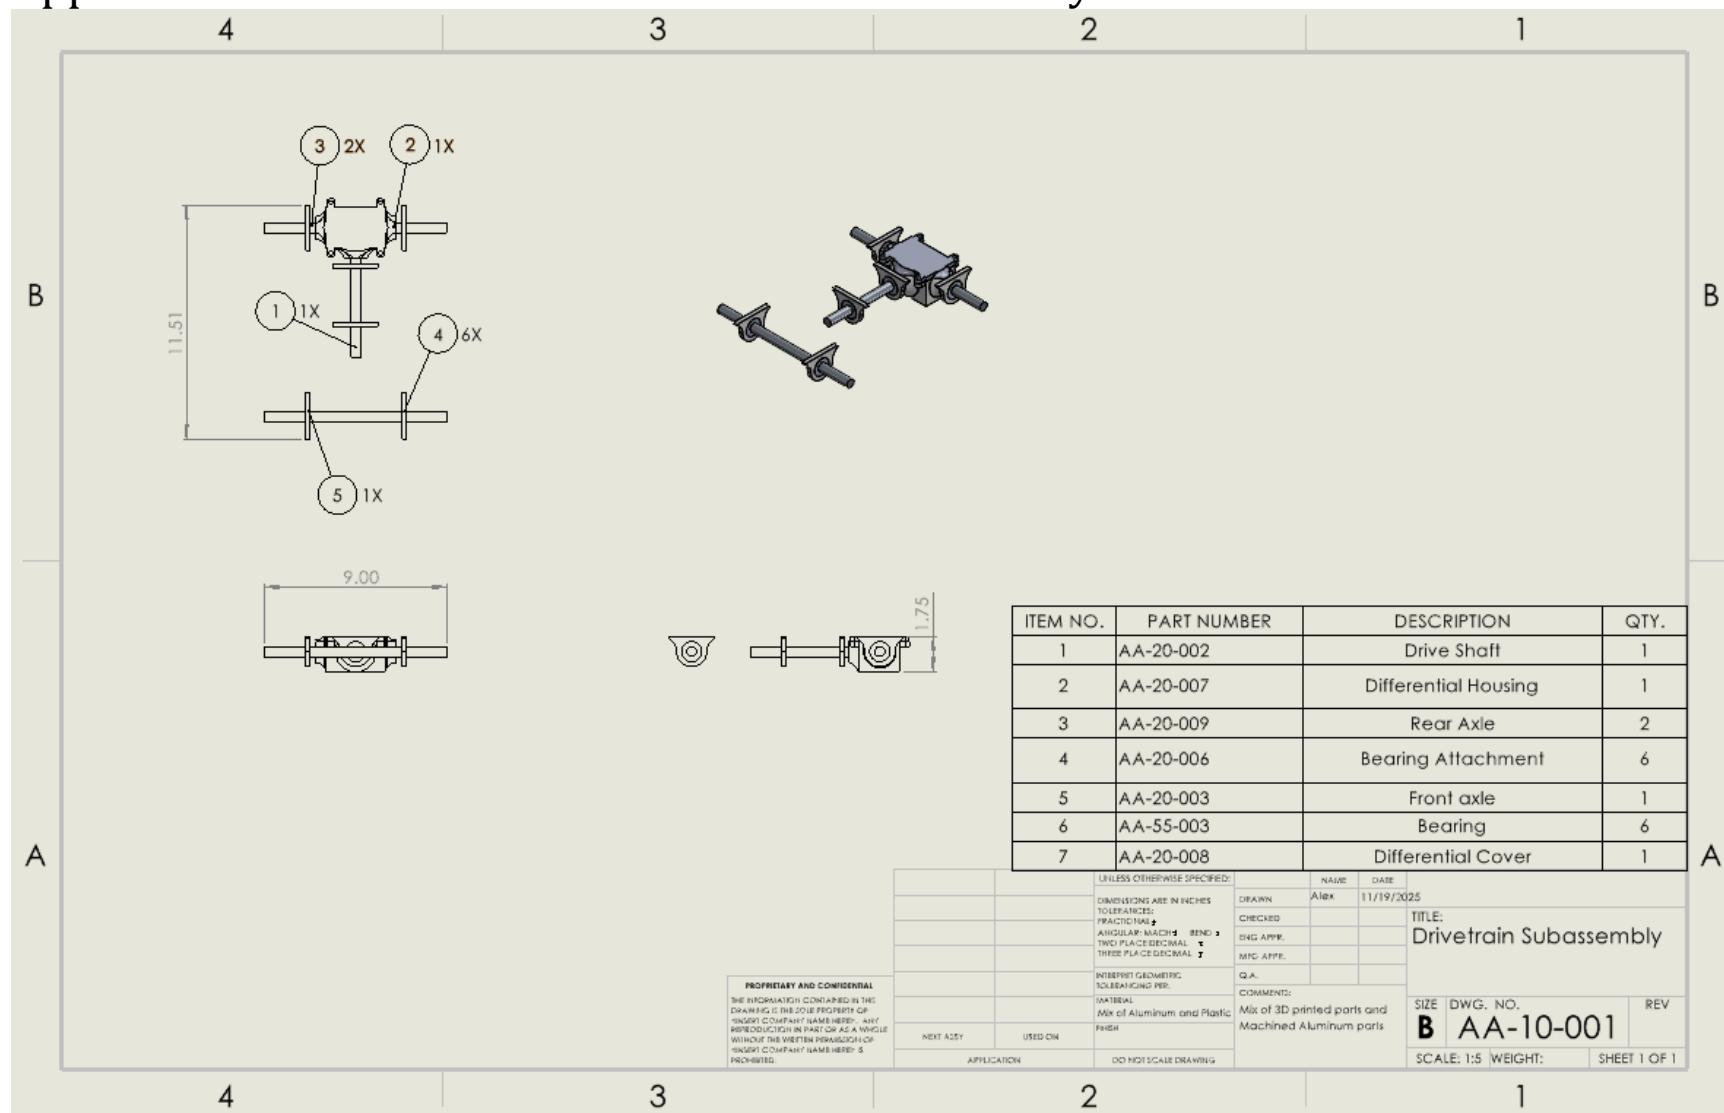


Appendix B05 -AA-10-002 – Chassis subassembly

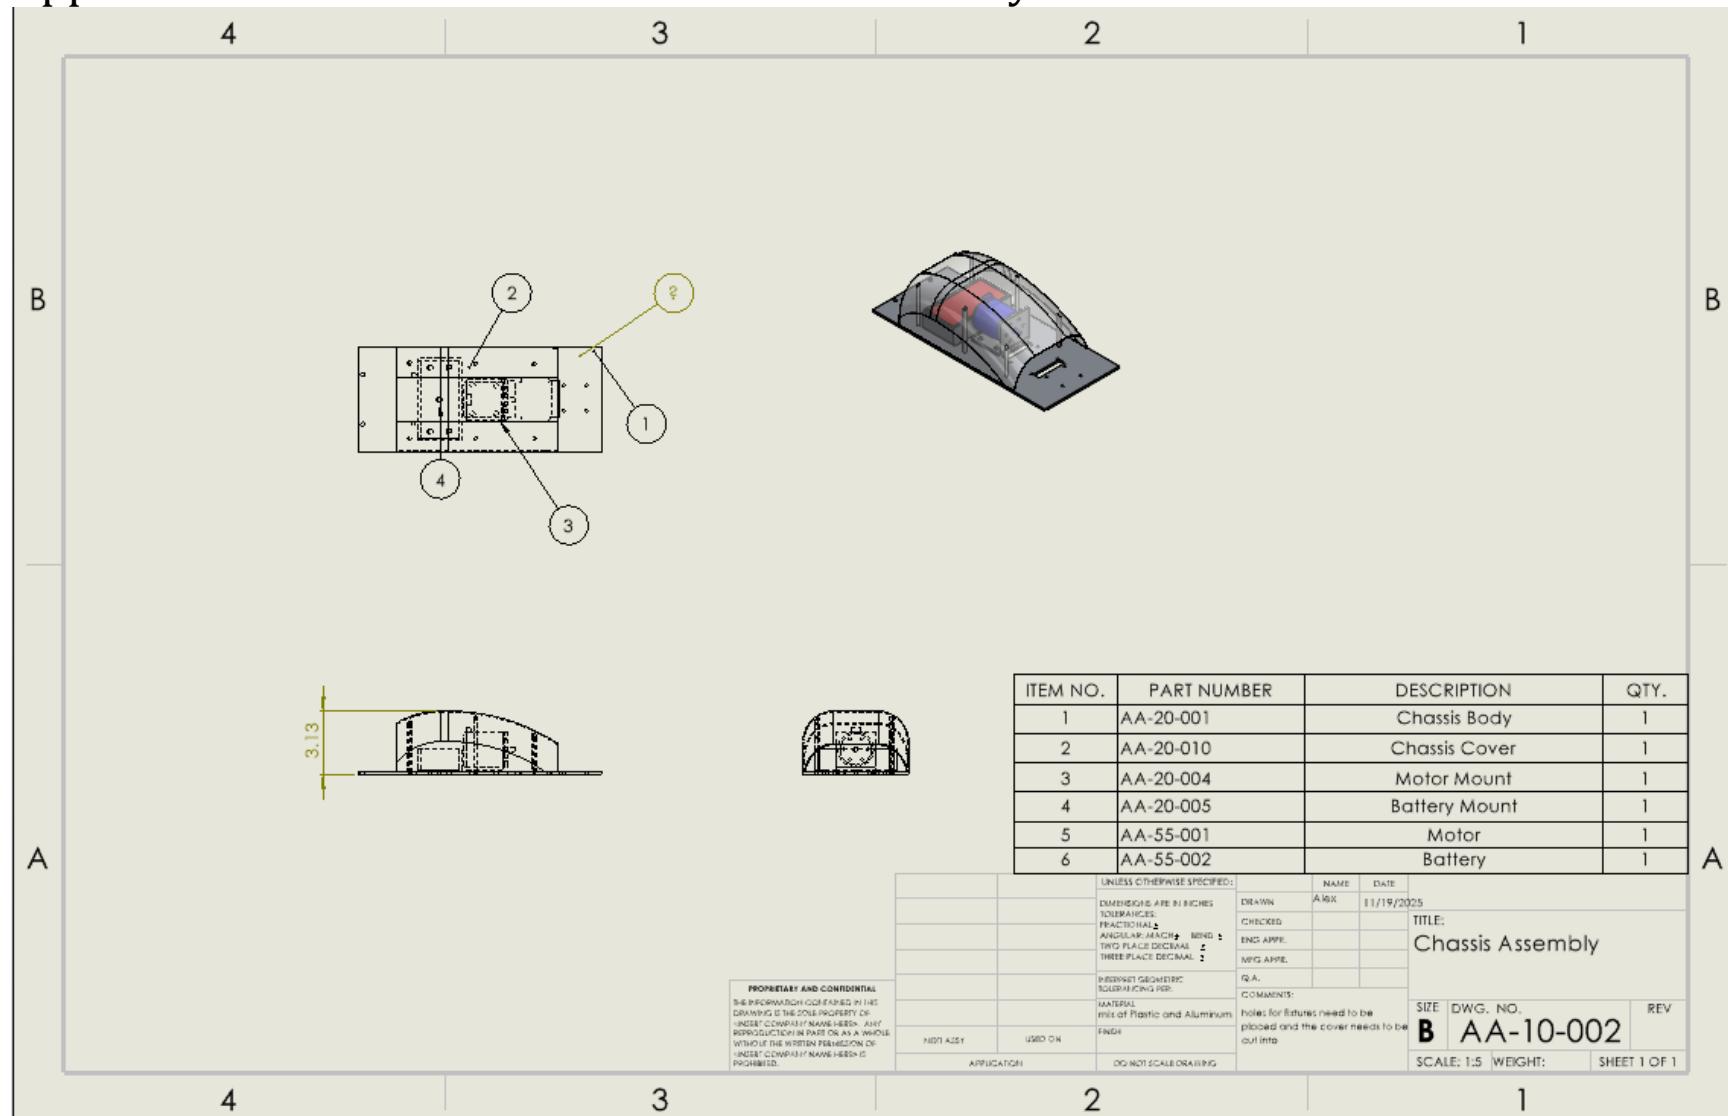


Appendix B06 – AA-20-001 – Chassis Frame

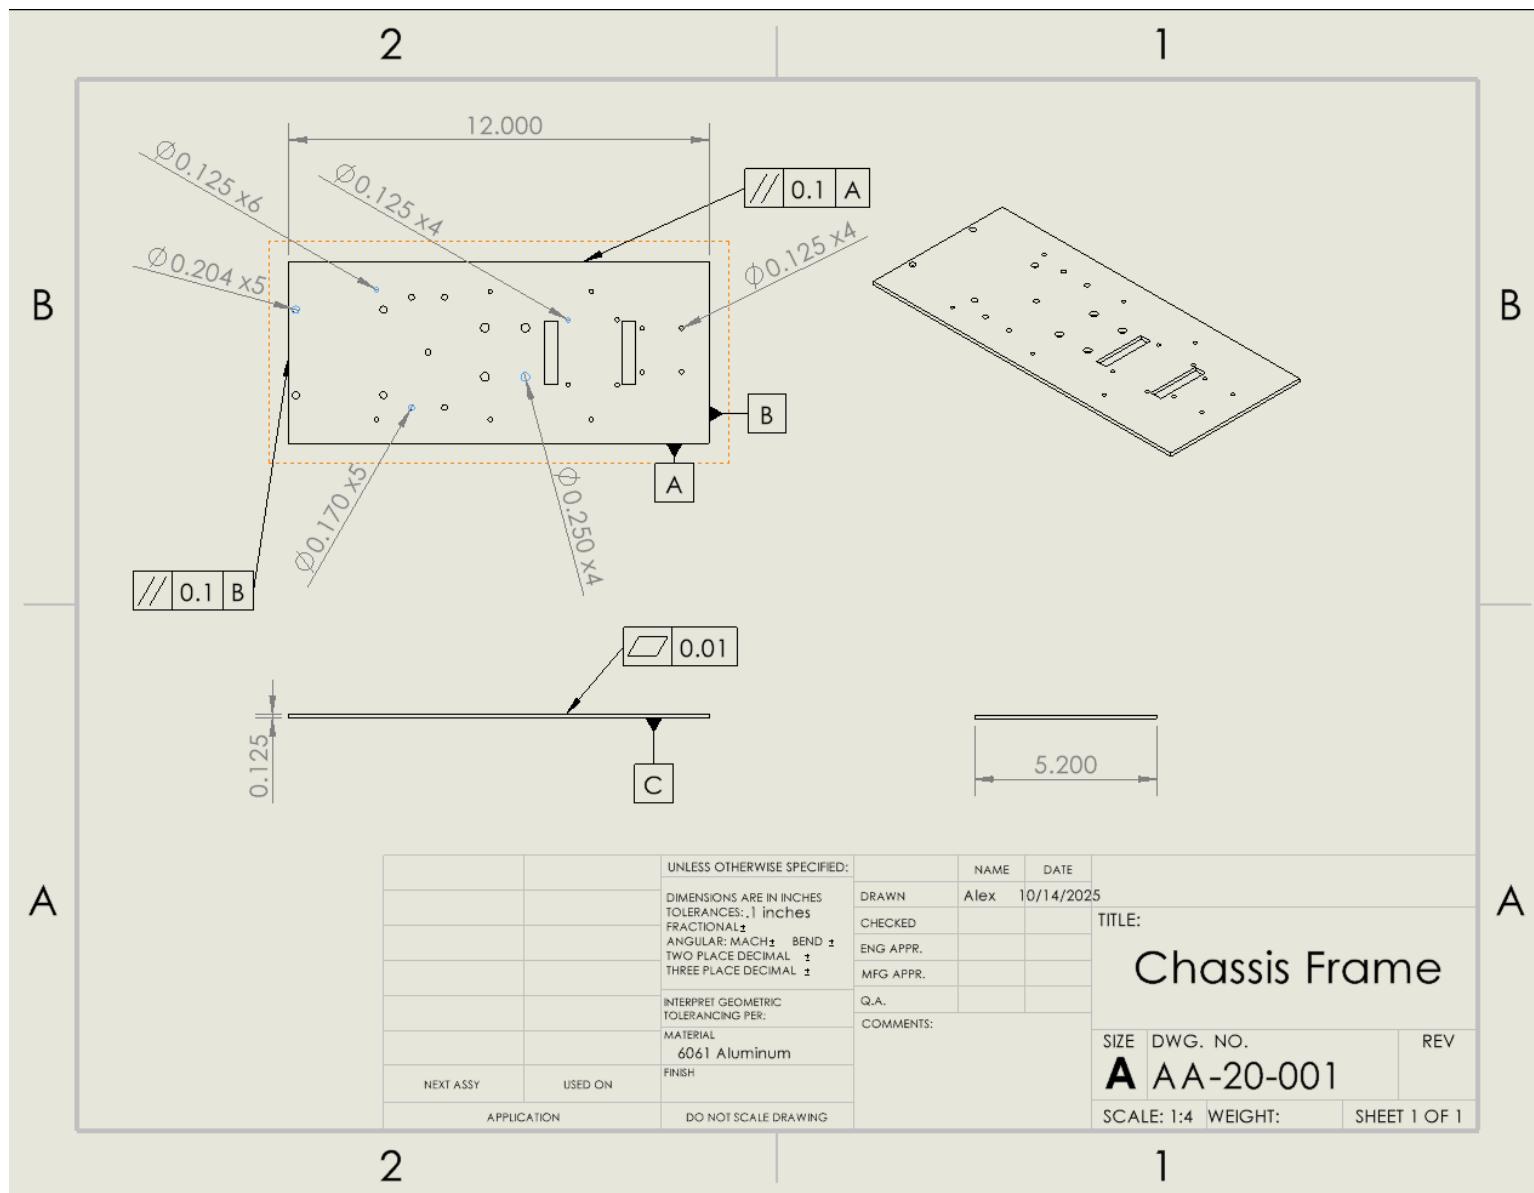


Appendix B07 – AA-20-002 – Drive Shaft

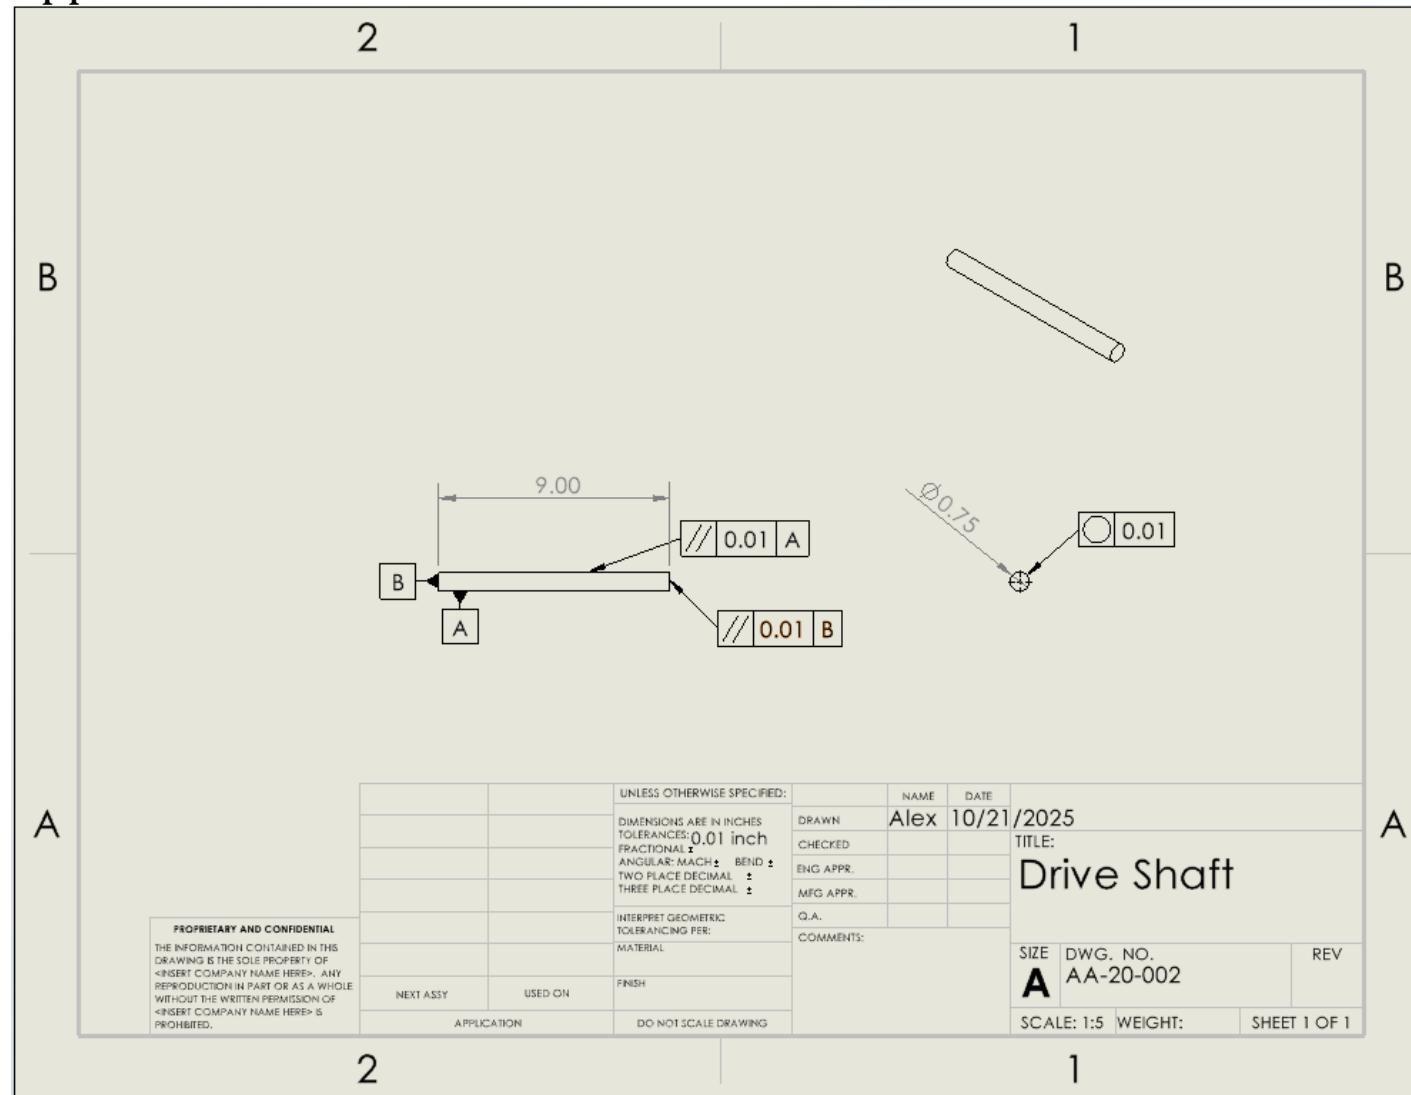


Appendix B08 – AA-20-003 – Axle

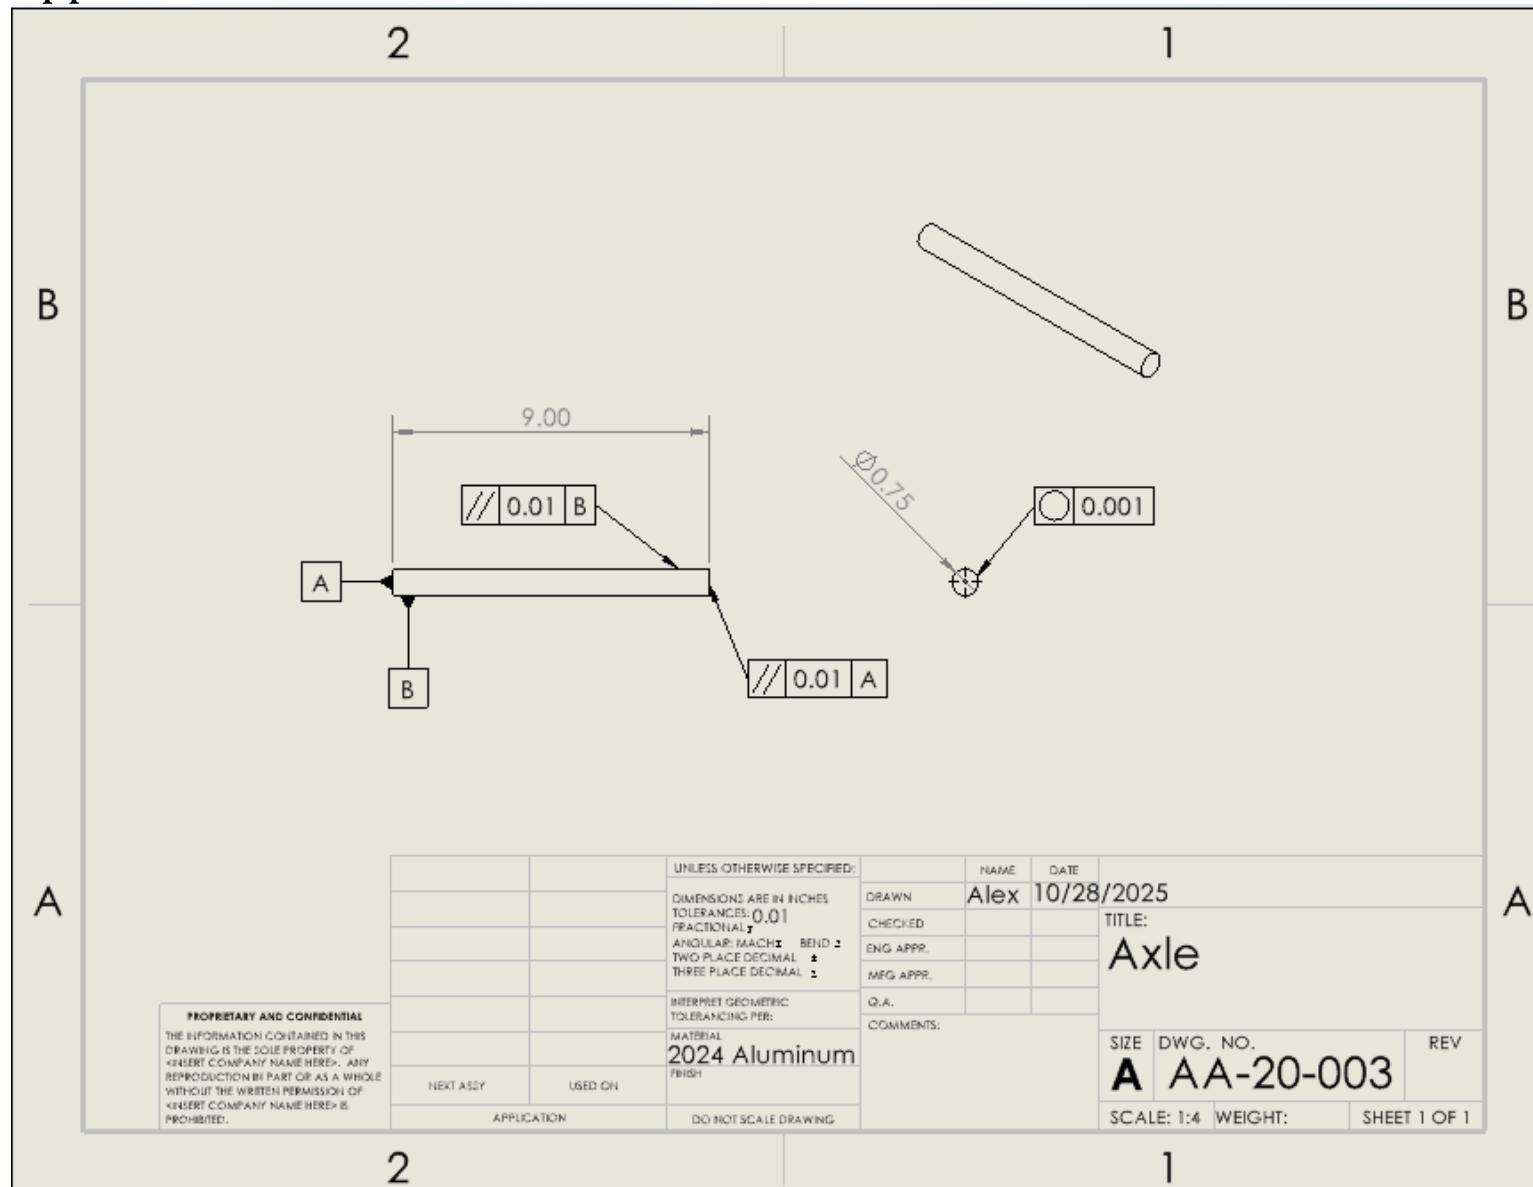


Appendix B09 – AA-20-004 – Motor Mount

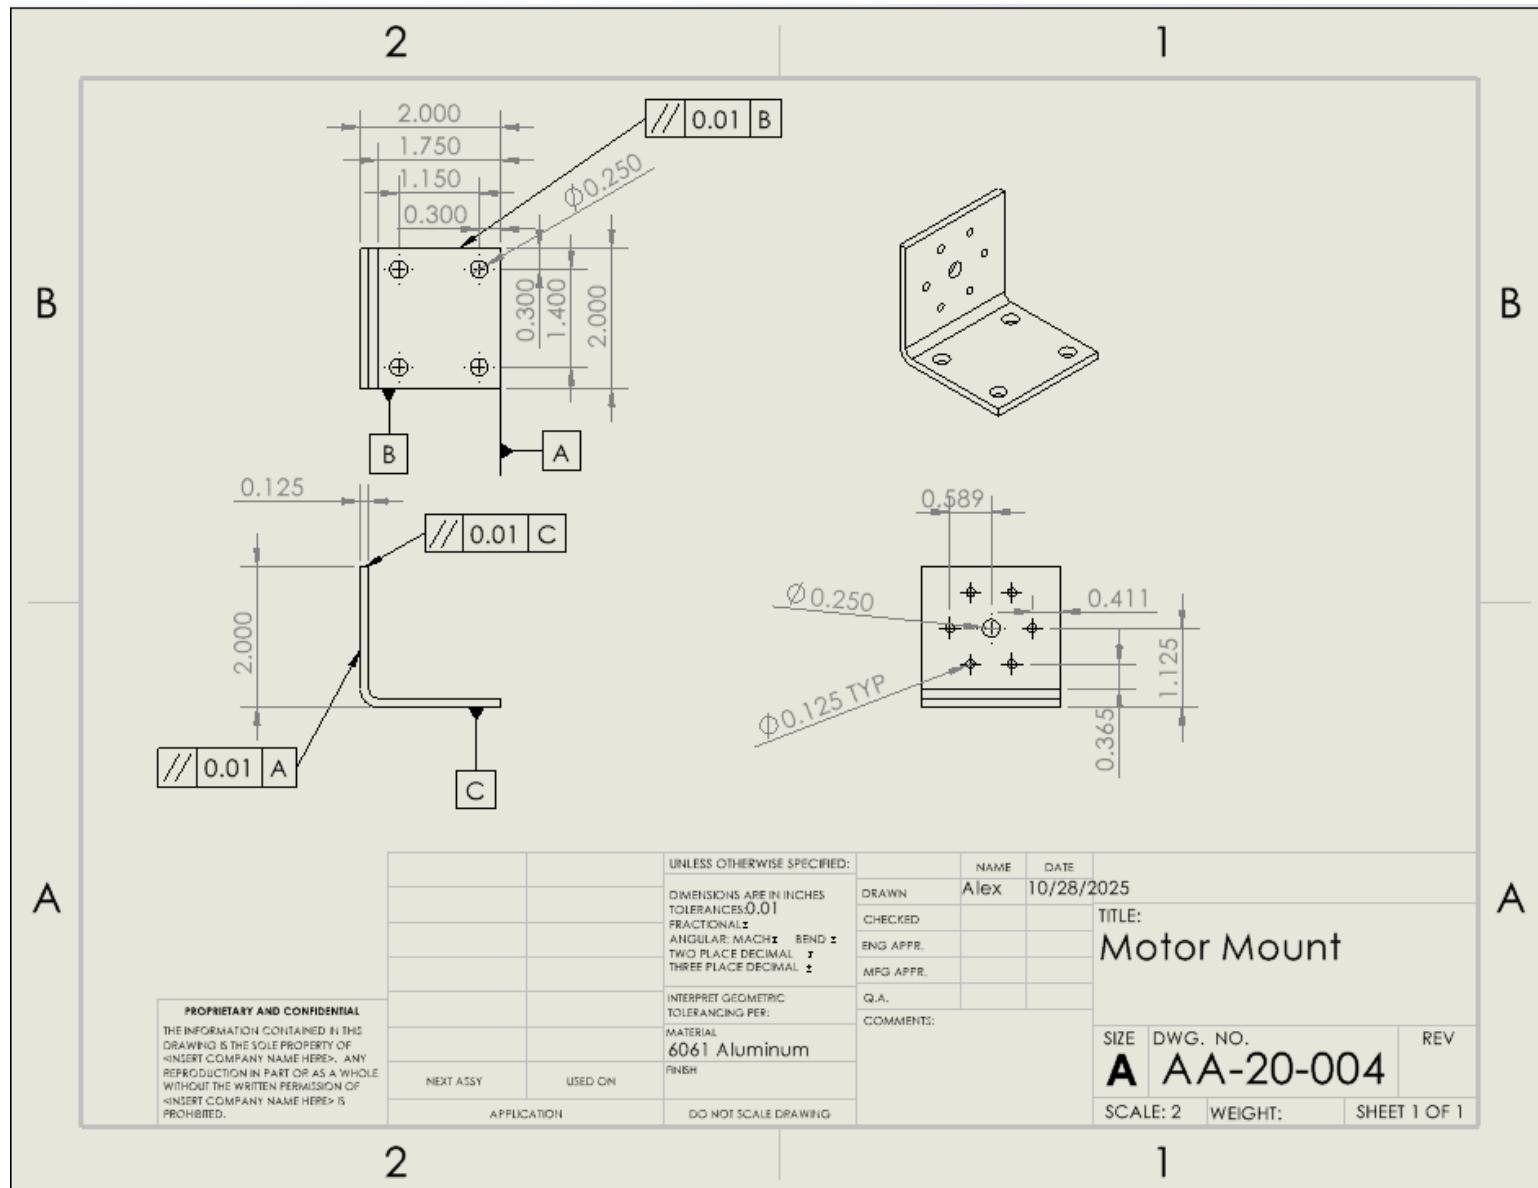


Appendix B10 – AA-20-005 – Battery Mount

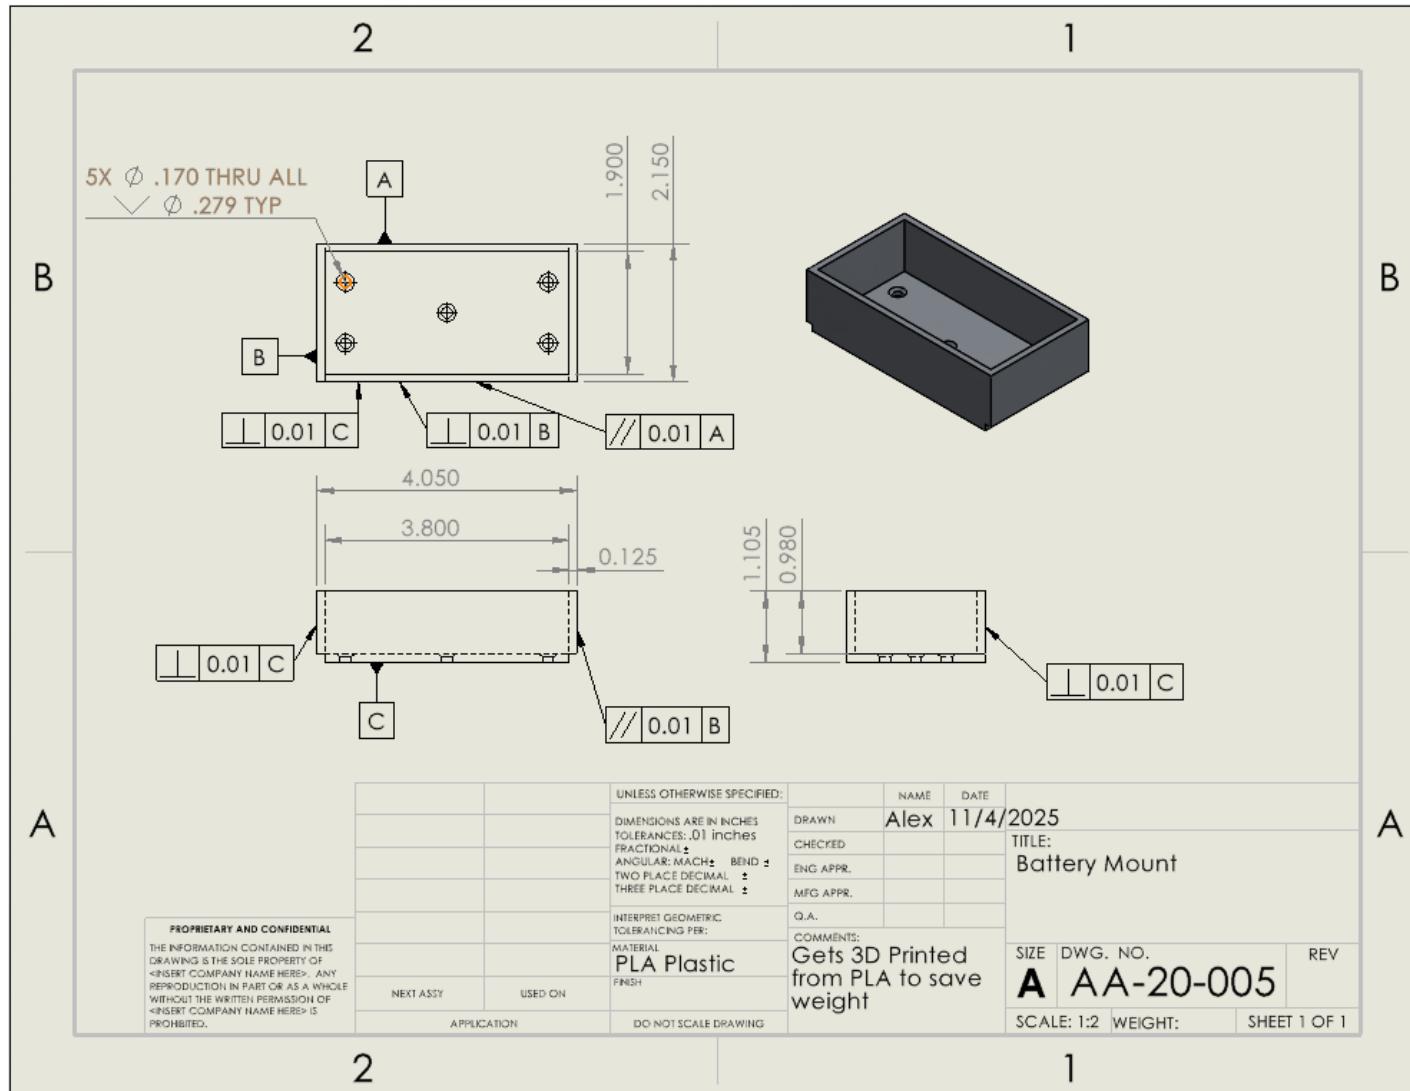


Appendix B11 – AA-20-006 – Drivetrain Bearing Mount

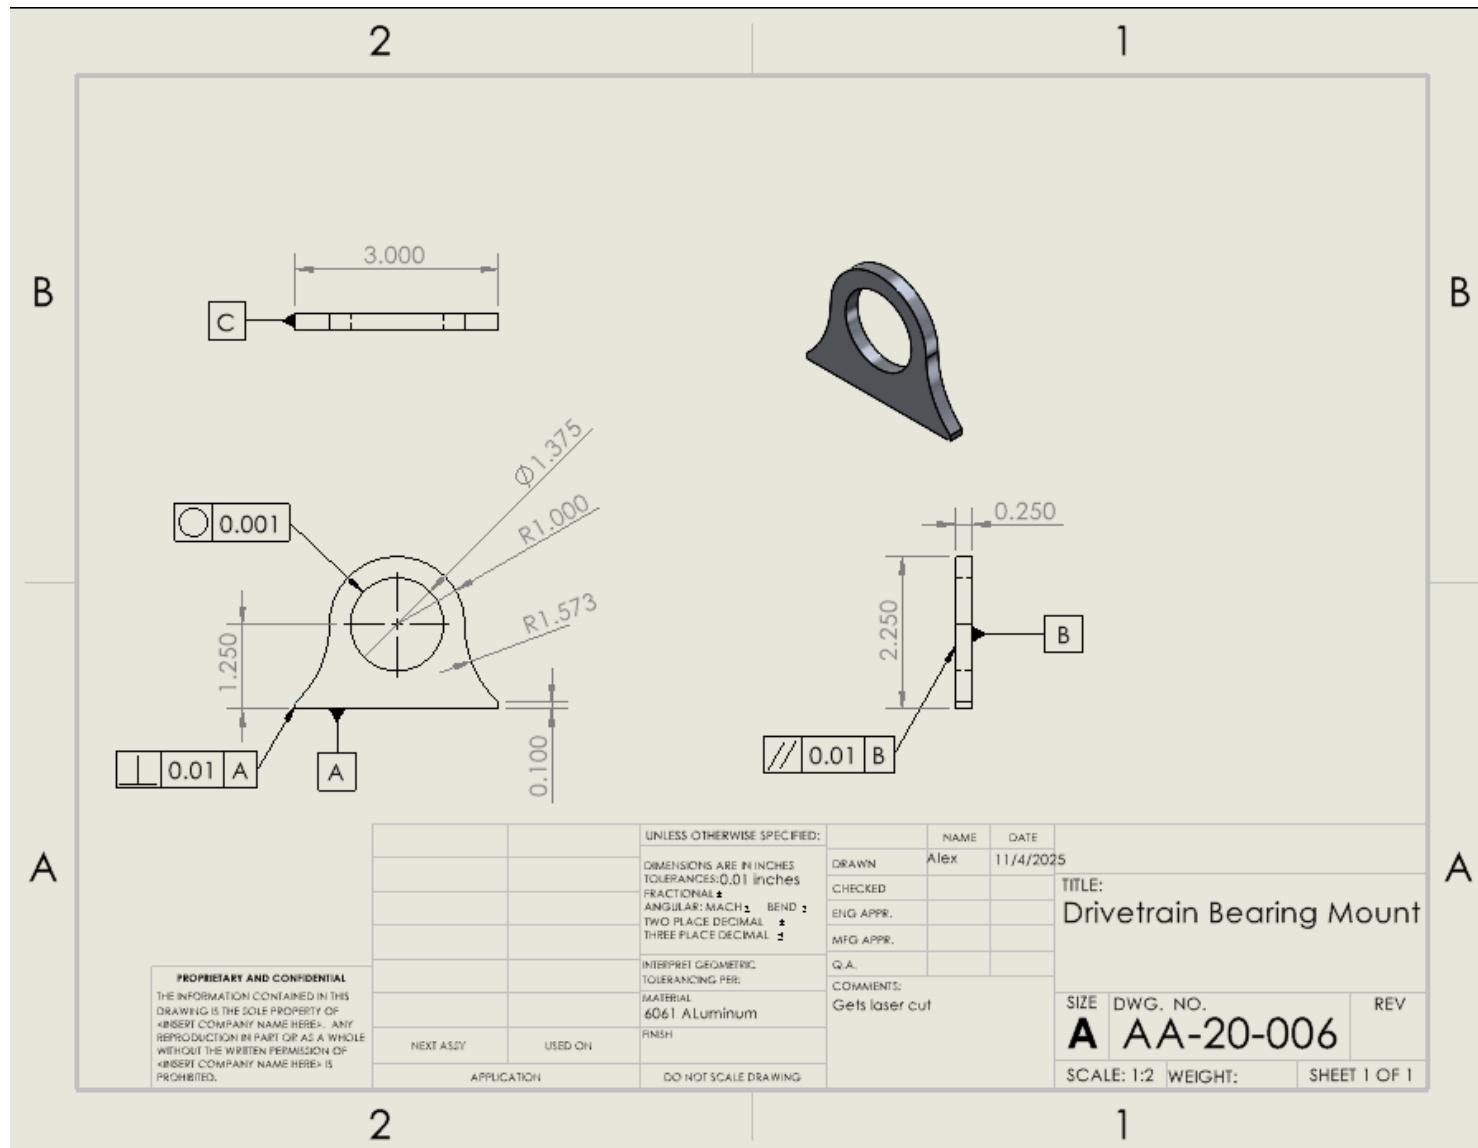


Appendix B12 – AA-20-007 – Rear Differential Lower Housing

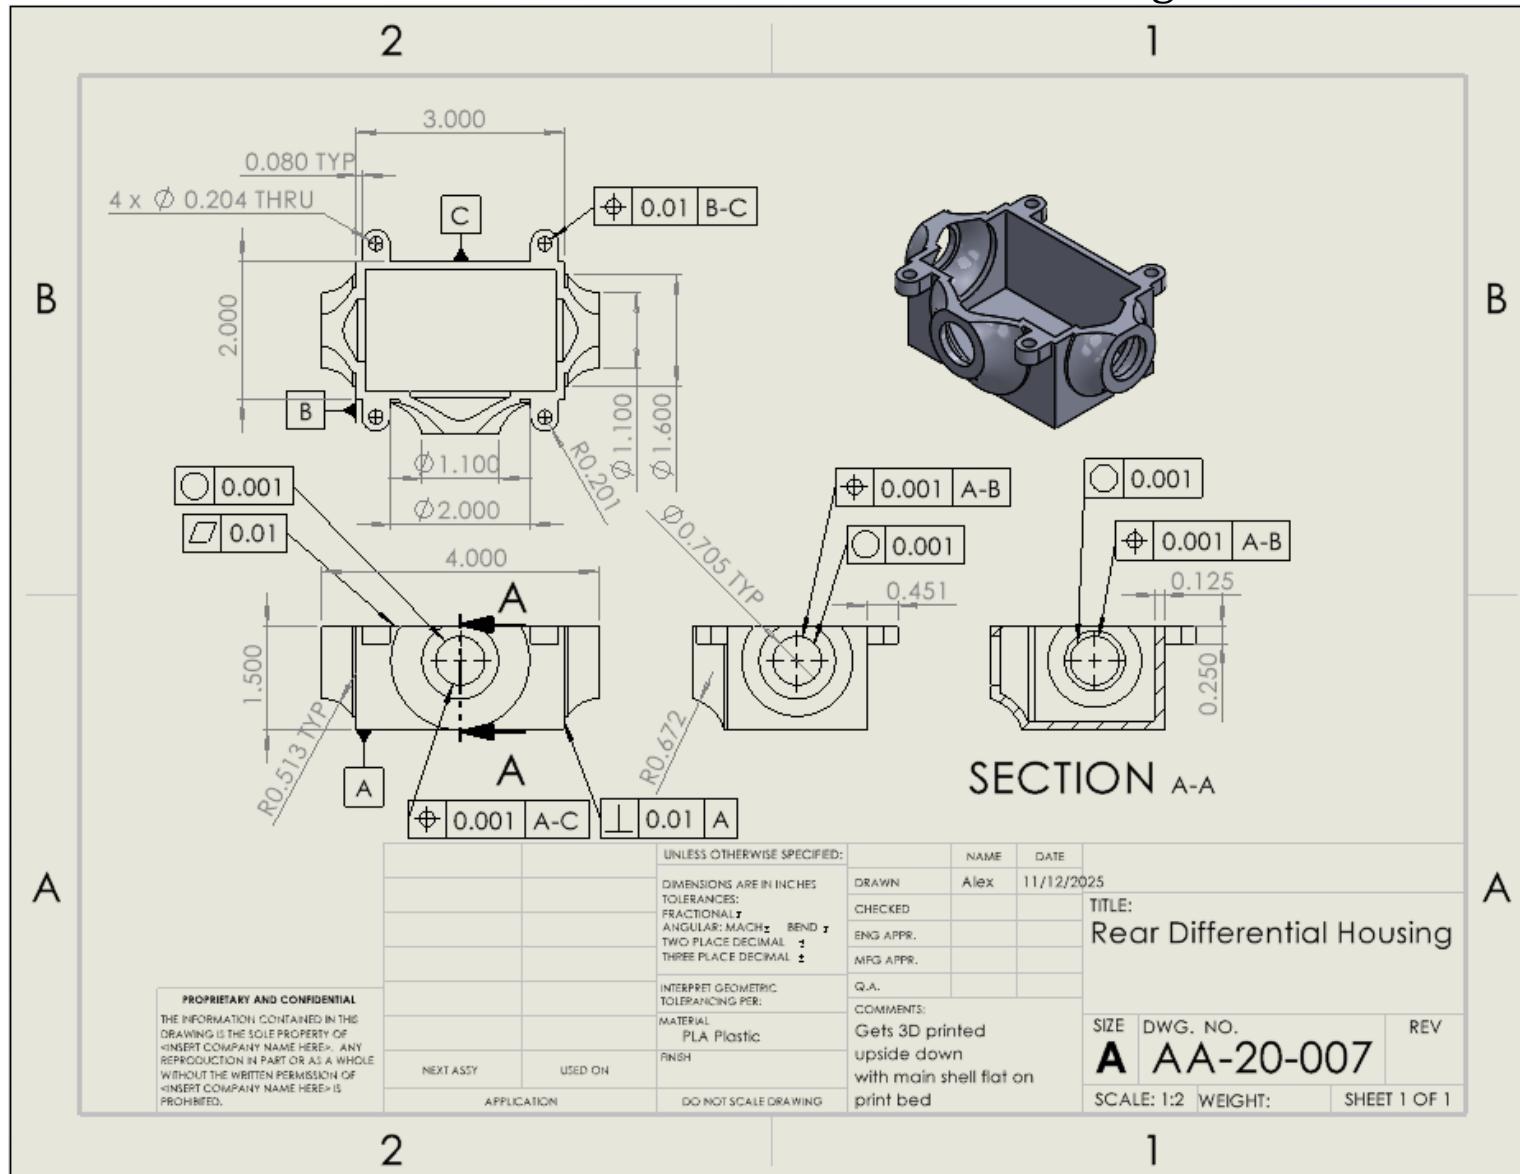


Appendix B13 – AA-20-008 – Rear Differential Cover

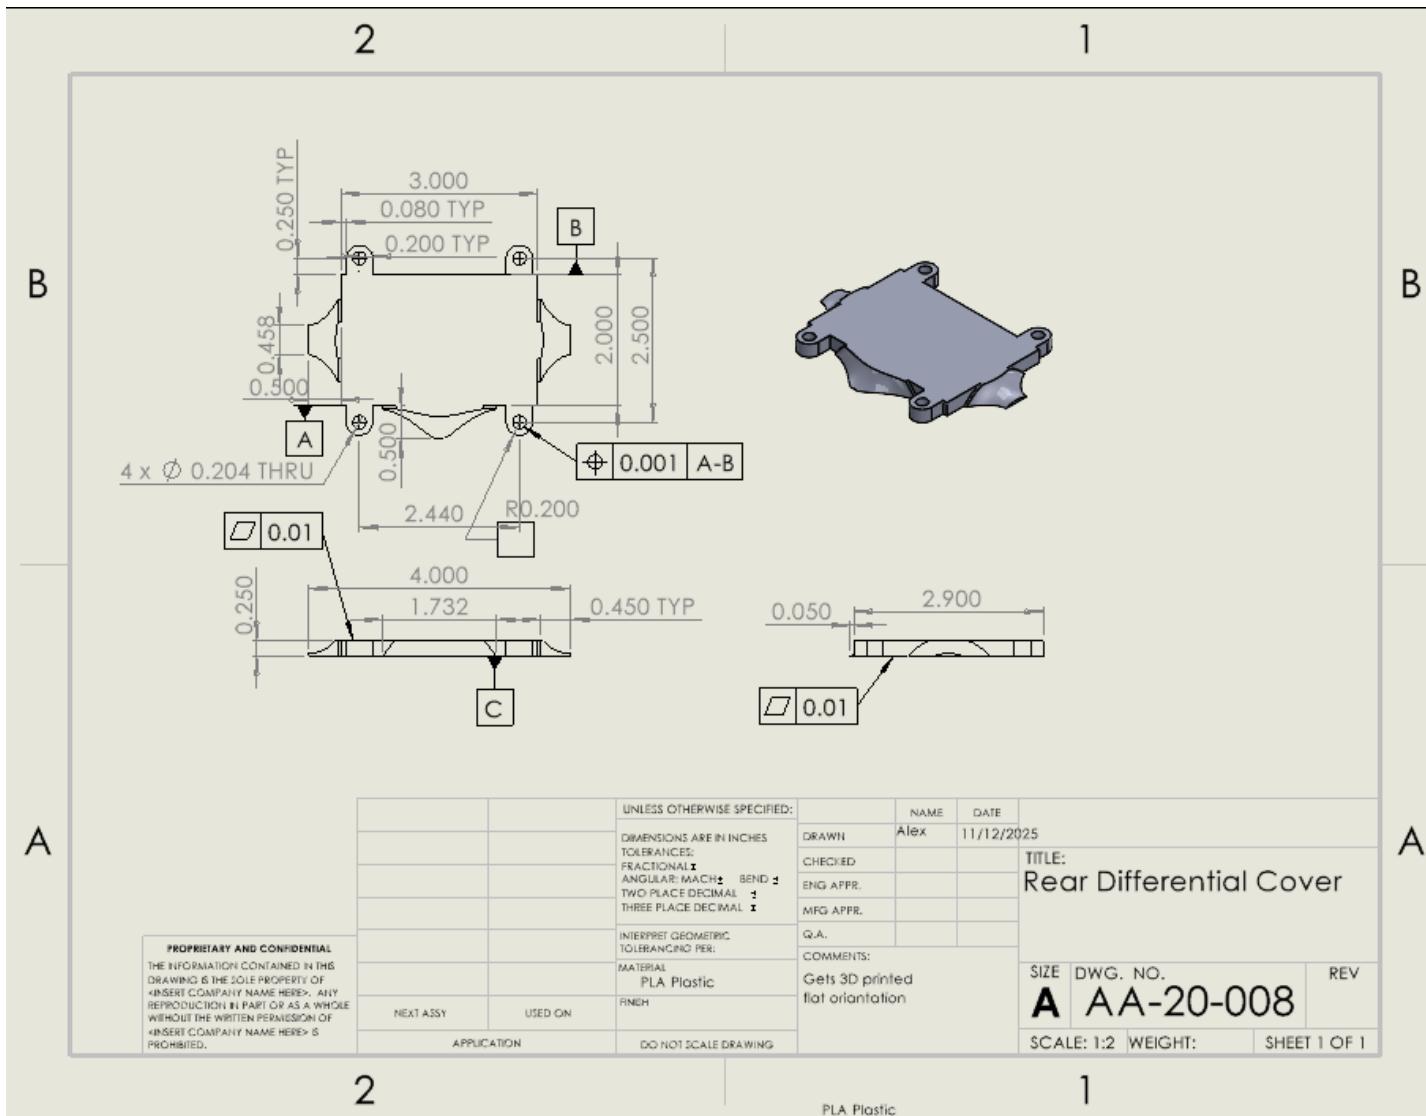

Appendix B14 – AA-20-009 – Rear Axle

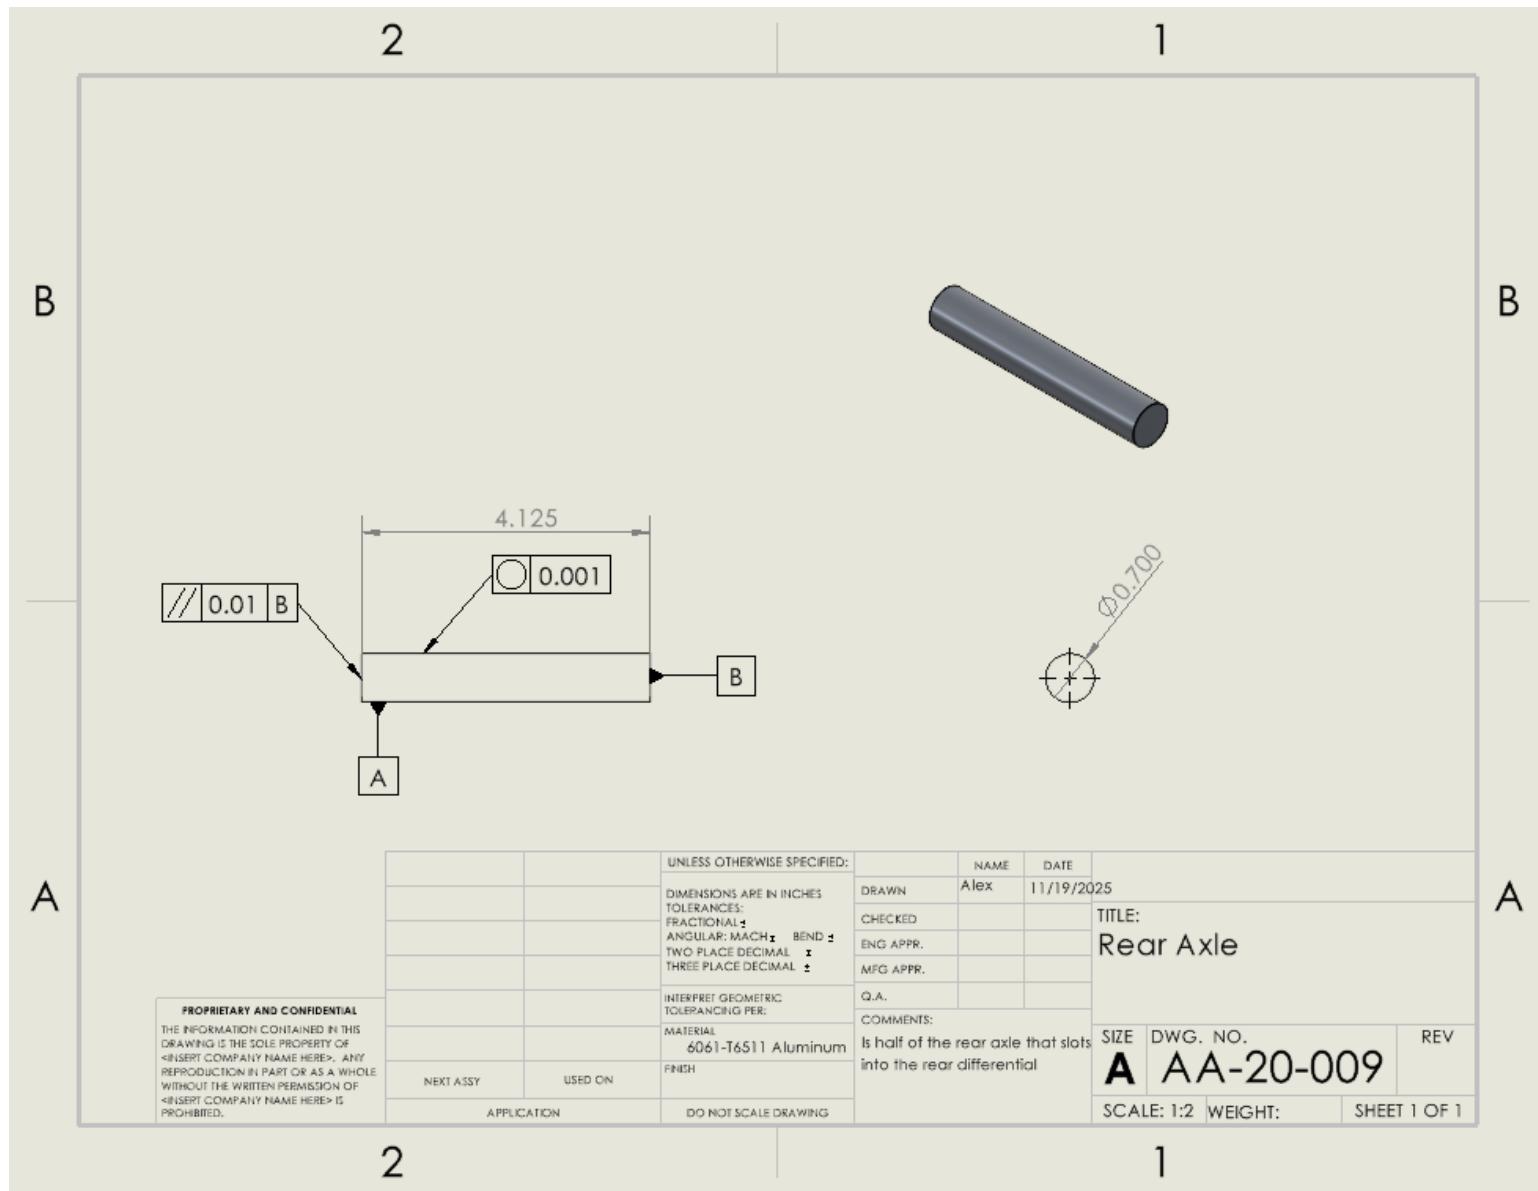

Appendix B15 – AA-20-010 – Chassis Aerodynamic Cover

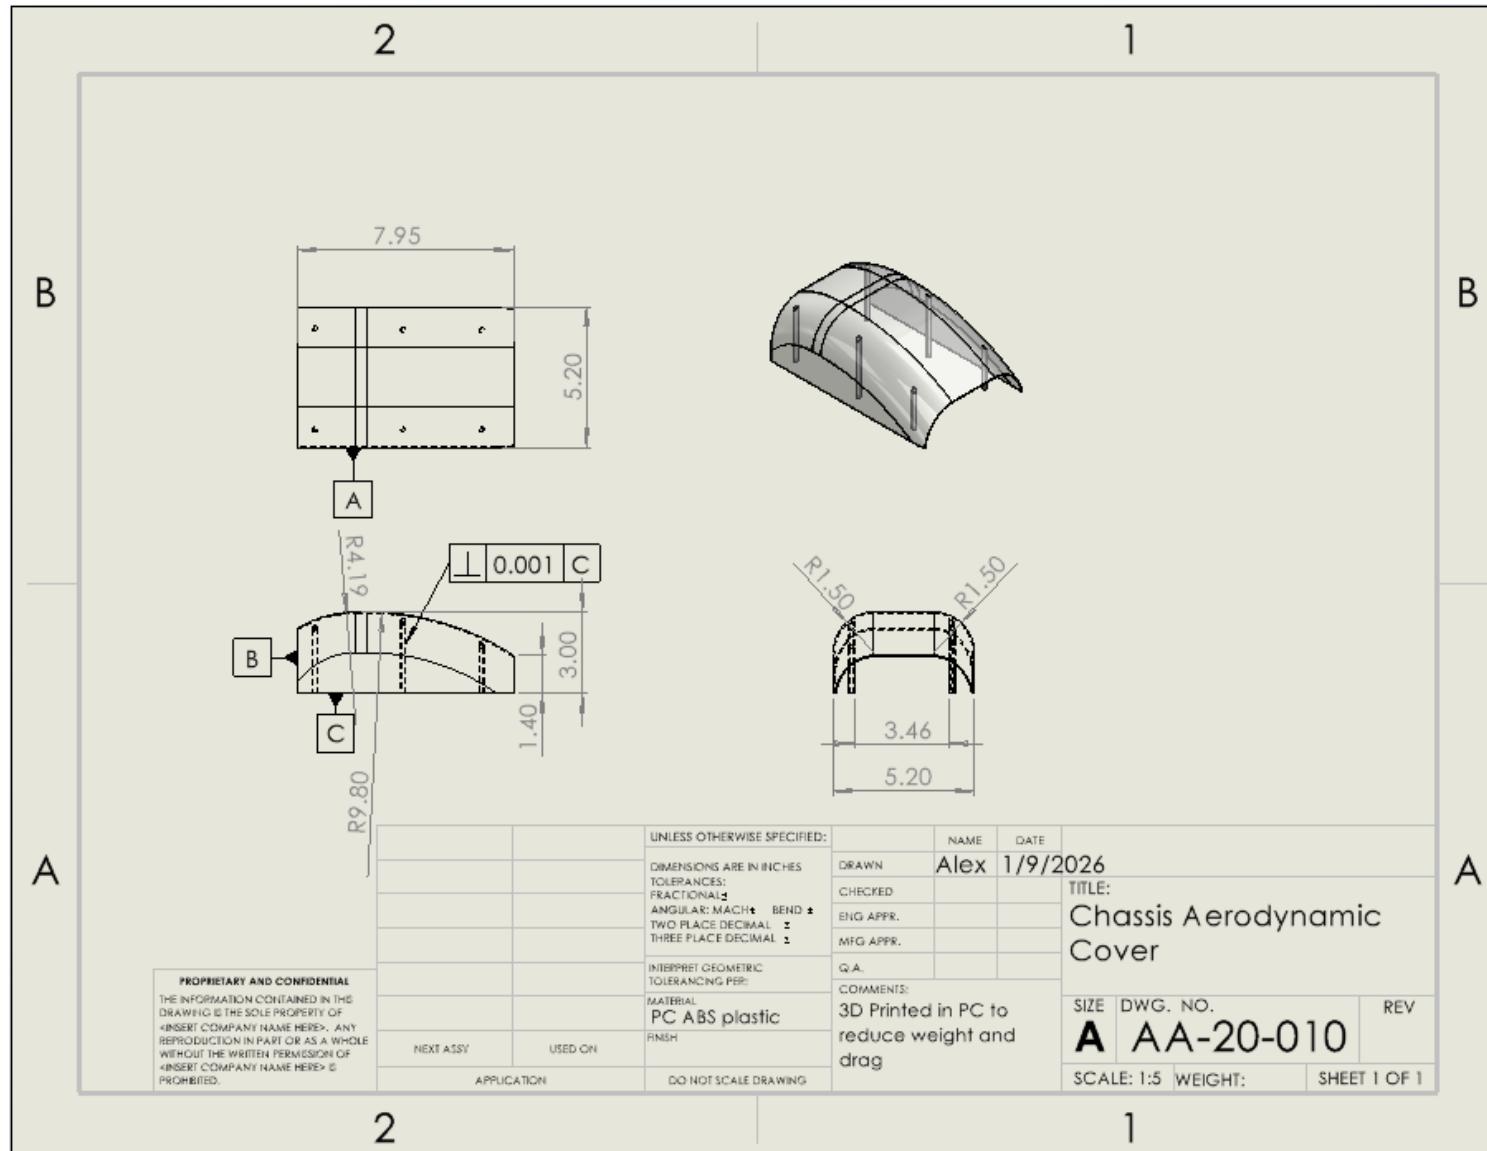

APPENDIX C – Parts List and Costs

Table C1. Parts List


Part Number	Qty	Part Description	Source	Cost	Disposition
20-001	1	Chassis Frame	Made in house	\$12/hour	To be made 1/12/2026
20-002	1	Driveshaft	Made in house	\$12/hour	To be made 1/19/2026
20-003	1	Axle	Made in house	\$12/hour	To be made 1/19/2026
20-004	1	Motor Housing	Made in house	\$12/hour	To be made 1/6/2026
55-001	1	Brushless motor V8 2400kV 4 pole	REDS Racing	\$179.99	To be ordered during winter quarter
55-002	1	ProTek RC 2S 130C low IR Si-Graphene + HV LiPo Battery (7.6V/6400mAh) with 5 mm connectors	Amain Hobbies	\$109.99	To be ordered during winter quarter
55-003	8	Gears for differential, motor gear box, and front axle	Amazon.com	\$50	To be order during winter quarter
			Cost Total:	\$ 387.98	
			Total Parts:	14	

APPENDIX D – Budget

Table D1. Project Budget.


Item	Qty	Description	Cost
.125inx2ftx2ft 6061-T6 Aluminum	1	From Metalsdepot.com Used for part 20-001 and 20-004	\$110.84
¾inx36ft Aluminum Round Bar 2024-T351	1	From Oninemetals.com Used for part 20-002 and 20-003	\$37.23
Brushless BL-2s 3300 KV motor + ESC	1	Traxxas	\$99.99
Partner Budget	5	List of purchased budget items from R/C Baja project partner	\$192.49
			Total: \$440.55
Manufacturing Labor	4 hours	Spent on manufacturing	\$48
Partner Labor	7 hours	Spent on manufacturing	\$200
			Total: \$248

APPENDIX E - Schedule

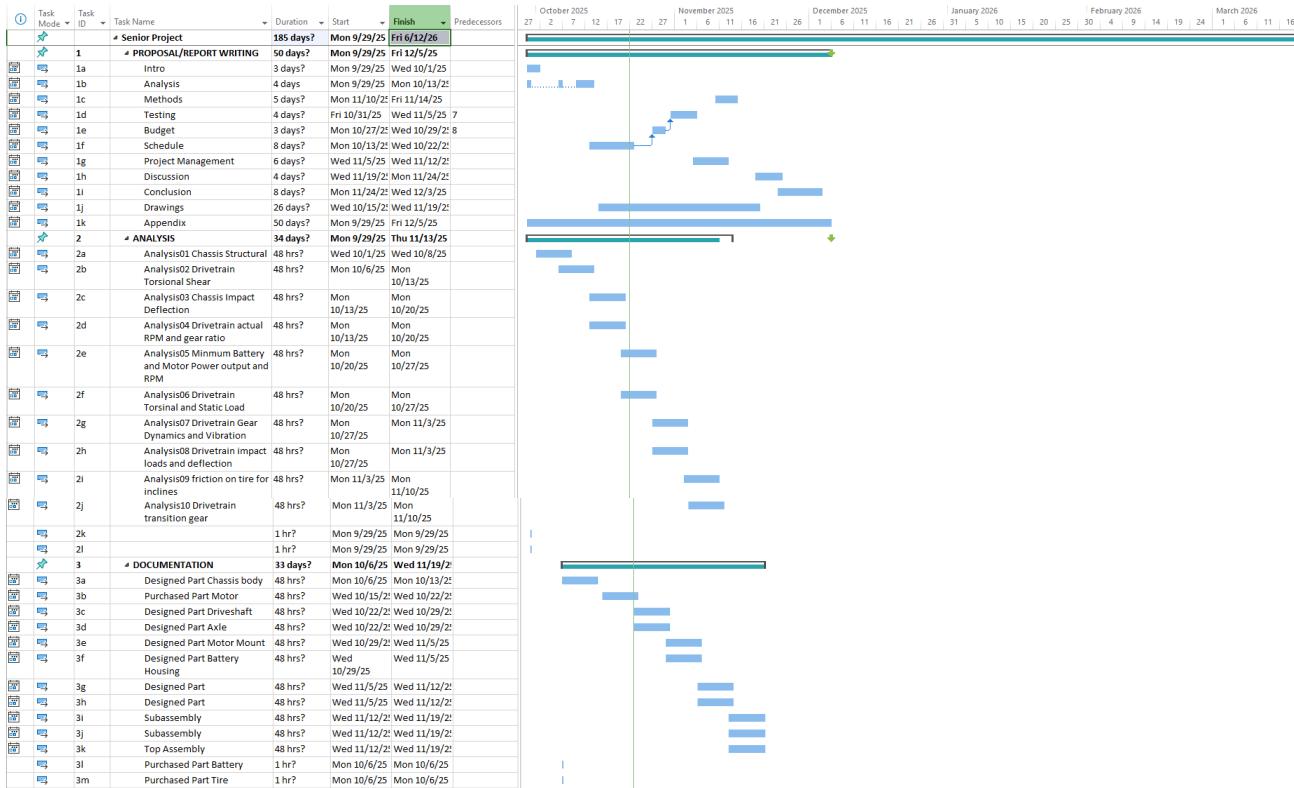


Fall Quarter Gantt Chart

4	▲ PART MANUFACTURING	57 days?	Tue 1/6/26	Wed 3/25/26
4a	Buy Motor	1 day	Tue 1/6/26	Tue 1/6/26
4b	Make Motor Housing	4 days?	Tue 1/6/26	Fri 1/9/26
4c	Make Chassis Body	3 days?	Mon 1/12/26	Wed 1/14/26
4d	Buy Battery	3 days?	Wed 1/14/26	Wed 1/14/26
4e	Make Battery Housing	3 days?	Wed 1/14/26	Fri 1/16/26
4f	Make Driveshaft	4 days?	Mon 1/19/26	Thu 1/22/26
4g	Update Website construction section	1 day?	Thu 1/22/26	Thu 1/22/26
4h	Manufacture Plan	5 days?	Mon 1/26/26	Fri 1/30/26
5	▲ DEVICE MANUFACTURING	54 days?	Tue 1/6/26	Fri 3/20/26
5a	Assemble Sub LL	5 days?	Mon 2/2/26	Fri 2/6/26
5b	Assemble Sub RR	5 days?	Mon 2/9/26	Fri 2/13/26
5c	Assemble Sub FF	5 days?	Mon 2/16/26	Fri 2/20/26
5d	Assemble	5 days?	Mon 2/23/26	Fri 2/27/26
5e	Take Device Pictures	5 days?	Mon 3/2/26	Fri 3/6/26
5f	Working Device On The Desk			

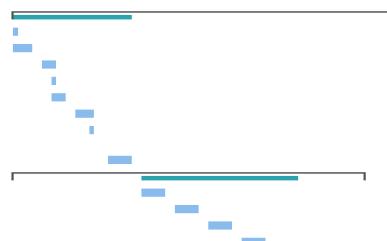

Winter Quarter

6	▲ DEVICE EVALUATION	54 days?	Tue 3/31/26	Fri 6/12/26
6a	Deflection Test	2 days?	Thu 4/2/26	Fri 4/3/26
6b	Acceleration Testing	5 days?	Mon 4/6/26	Fri 4/10/26
6c	Friction Testing	5 days?	Mon 4/13/26	Fri 4/17/26
6d	Sudden stop and Start Testing	5 days?	Mon 4/20/26	Fri 4/24/26
6e		5 days?	Mon 4/27/26	Fri 5/1/26
6f		5 days?	Mon 5/4/26	Fri 5/8/26
6g		5 days?	Mon 5/11/26	Fri 5/15/26
6h		5 days?	Mon 5/18/26	Fri 5/22/26
6i	Take Device Photos	5 days?	Mon 5/25/26	Fri 5/29/26
7	▲ DELIVERABLES	54 days?	Tue 3/31/26	Fri 6/12/26
7a	Web Page/Design	48 hrs?	Fri 5/29/26	Fri 6/5/26
7b	SOURCE	2 hrs?	Wed 5/20/26	Thu 5/21/26
7c	Create Presentation	48 hrs?	Fri 5/29/26	Fri 6/5/26
7d	Test reports	336 hrs?	Thu 4/2/26	Fri 5/29/26
7e	Update Website	1 hr?	Mon 5/25/26	Mon 5/25/26
7f	Make USB Drive	40 hrs?	Mon 5/11/26	Fri 5/15/26
7g	Final Presentation	40 hrs?	Mon 6/8/26	Fri 6/12/26
7h	Final Report Submission	40 hrs?	Mon 6/1/26	Fri 6/5/26

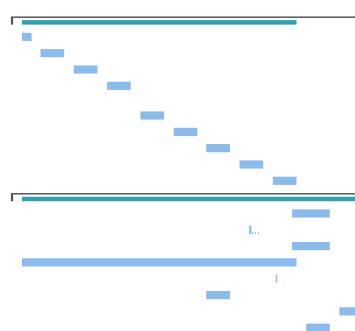

Spring Quarter

APPENDIX F – Expertise and Resources

Appendix F01 – Drivetrain Decision Matrix

Criterion	Weight 1 to 3	Best Possible 3	Front Wheel	Score x Wt	Rear Wheel	Score x Wt	All Wheel	Score x Wt
Cost	2	6	1	2	3	6	2	4
Weight	3	9	2	6	2	6	1	3
Manufacturability	3	9	2	6	3	9	2	6
Drivetrain Impact Resistance	1	3	2	2	3	3	2	2
Chassis Impact Resistance	2	6	2	4	2	4	1	2
Drivetrain Speed	3	9	1	3	2	6	1	3
Controllability	3	9	2	6	2	6	3	9
Total	17	51		29		40		29
NORMALIZE THE DATA (multiply by fraction, N)								
Decide if Bias is Good or Bad	Good Bias:	Standard Deviation is two or more digits		Good? Then done.		64.1 Average		
	Poor Bias:	Standard Deviation is one or less digits		Poor? Change something!!!		12 Std Dev.		
Weighting/Scoring Scale								
	1	Worst (too costly, low confidence, too big, etc.)						
	2	Median Values, or Unsure of actual value						
	3	Best (Low Cost, high confidence, etc.)						
Criterion								
Cost	This includes material costs and the costs for components							
Weight	This includes the weight of the chassis and the drivetrain							
Manufacturability	This includes how difficult it will be to manufacture the subassemblies							
Drivetrain Impact Resistance	This includes how the drive train will react to sudden impacts							
Chassis Impact resistance	This includes how the chassis will react to sudden impacts							
Drivetrain Speed	This includes how the drive train will be able to accelerate and sustain speeds over all terrains							
Controllability	This includes how difficult it will be to steer will be with torque forces acting on with or against the direction of motion							
Comments:								
	For the cost this was put as a 2 as this signifies a lower cost requirement							
	For the Weight criterion, this was set at a 3 as this criterion is significant to the design requirements							
	For Manufacturing, this is set at a 3, as the manufacturing of this project should be achievable within 10 weeks							
	For Drivetrain Impact Resistance, this is set at a 1 as this criterion isn't as important as other criterion however is still worth considering as it is involved in the design requirements							
	For Chassis impact resistance, this is set for a 2 because it is more important to take into consideration than the drivetrain impact resistance, this is because this needs to not fail during impacts							
	For Drivetrain speed, this is set for a 3, this is because the drivetrain must be able to deliver enough torque to speed up quickly during the sprint competition.							
	for Controllability, this is also set for a 3 as this is important for speeding up and slowing down for tight turns for the slalom competition.							

Appendix F02 – Metal Construction Method Decision Matrix

Criterion	Weight 1 to 3	Best Possible 3	Laser Cut	Score x Wt	CNC	Score x Wt	Mix of Both	Score x Wt
Cost	1	3	1	1	1	1	2	2
Weight	2	6	2	4	1	2	2	4
Able to get to spec	3	9	3	9	2	6	3	9
Postprocessing	3	9	1	3	2	6	2	6
Time Spent on manufacturing	2	6	2	4	1	2	2	4
Total	11	33		21		17		25
NORMALIZE THE DATA (multiply by fraction, N)								
Decide if Bias is Good or Bad	Good Bias:	Standard Deviation is two or more digits		Good? Then done.		63.6 Average		
	Poor Bias:	Standard Deviation is one or less digits		Poor? Change something!!!		12 Std Dev.		
	You can change the criteria, weighting, or the projects themselves...							
Weighting/Scoring Scale								
	1	Worst (too costly, low confidence, too big, etc.)						
	2	Median Values, or Unsure of actual value						
	3	Best (Low Cost, high confidence, etc.)						
Criterion								
Cost	Cost of Manufacturing							
Weight	Weight weight of moving material around the workshop							
Able to get to spec	How close the student can get to tolerance							
Postprocessing	Confidence level in the indicated failure location							
Time spent on manufacturing	Is the shape prismatic (rectangle, square, etc) or is it irregularly shaped to meet the engineering needs							

Appendix F03 – Plastic Construction Method Decision Matrix

Criterion	Weight 1 to 3	Best Possible 3	3D printing	Score x Wt	Vaccum	Score x Wt	Heat mold	Score x Wt
Cost	1	3	2	2	2	2	2	2
Weight	2	6	3	6	2	4	2	4
Precision of Tolerance	3	9	3	9	1	3	1	3
Machine Availability	2	6	3	6	1	2	1	2
Material Availability	3	9	2	6	1	3	1	3
Total	11	33		29		14		14
NORMALIZE THE DATA (mulpily by fraction, N)		3.03		87.9		42.4		42.4 Percent
Decide if Bias is Good or Bad			Good Bias: Standard Deviation is two or more digits Poor Bias: Standard Deviation is one or less digits You can change the criteria, weighting, or the projects themselves...		Good? Then done. Poor? Change something!!!		57.6 Average 26 Std Dev.	
Weighting/Scoring Scale								
1 Worst (too costly, low confidence, too big, etc.) 2 Median Values, or Unsure of actual value 3 Best (Low Cost, high confidence, etc.)								
Criterion								
Cost The cost of Materials Weight Weight of the materials								
Precision of Tolerances How well does the plastic accomadated tolerances								
Machine Availability How Available the machince is								
Material Availability How easy is the material aquired								

Appendix F04 – Chassis Material Selection Decision Matrix

Criterion	Weight 1 to 3	Best Possible 3	Aluminum	Score x Wt	PLA	Score x Wt	ABS	Score x Wt
cost	2	6	1	2	2	4	1	2
Weight	3	9	2	6	2	6	2	6
Availability	2	6	3	6	1	2	1	2
Strength	3	9	3	9	2	6	3	9
Torsional Resistance	3	9	2	6	1	3	1	3
Total	13	39		29		21		22
NORMALIZE THE DATA (mulpily by fraction, N)		2.56		74.4		53.8		56.4 Percent
Decide if Bias is Good or Bad			Good Bias: Standard Deviation is two or more digits Poor Bias: Standard Deviation is one or less digits		Good? Then done. Poor? Change something!!!		61.5 Average 11 Std Dev.	
Weighting/Scoring Scale								
1 Worst (too costly, low confidence, too big, etc.) 2 Median Values, or Unsure of actual value 3 Best (Low Cost, high confidence, etc.)								
Criterion								
Cost More mass is more cost Weight The car needs to be under a specific weight								
Availability How easy is it to aquire the material Strength how likely is it to bend or break								
Torsional resistance how likely is it to bend or break when twisted								
Comments:								
Done for the Chassis								

APPENDIX G – Testing Report

Appendix G1 (Replace with test title here)

Introduction

Method/Approach

Test Procedure

Deliverables

Appendix G1.1 – Procedure Checklist

Appendix G1.2 – Data Forms

Appendix G1.3 – Raw Data

Appendix G1.4 – Evaluation Sheet

Appendix G1.5 – Schedule (Testing)

Appendix G2 (Replace with test title here)

Introduction

Method/Approach

Test Procedure

Deliverables

Appendix G2.1 – Procedure Checklist

Appendix G2.2 – Data Forms

Appendix G2.3 – Raw Data

Appendix G2.4 – Evaluation Sheet

Appendix G2.5 – Schedule (Testing)

Appendix G3 (Replace with test title here)

Introduction

Method/Approach

Test Procedure

Deliverables

Appendix G3.1 – Procedure Checklist

Appendix G3.2 – Data Forms

Appendix G3.3 – Raw Data

Appendix G3.4 – Evaluation Sheet

Appendix G3.5 – Schedule (Testing)

APPENDIX H – Resume

ALEX AMADIO

| alex.amadio@outlook.com

Objective

I am looking to gain experience for a career with a Mechanical engineering background.

Skills & Abilities

Abilities

- Flexibility for complex situations
- On-the-spot learning
- Problem solving in creative and cost-effective ways.

Skills

- 5+ years' experience in 3D modeling in AutoCAD Fusion 360
- SolidWorks Associate Certified
- 5+ years' experience 3D printing
- Project cost analysis
- Public Speaking

Experience

June 2021-
september 2021

Courtesy Clerk, *Safeway*

- Worked to help customer satisfaction, and bagging for cashiers.

September 2021-
december 2021
June 2022 –
September 2022

Deli Clerk, *Safeway*

- Helped with housekeeping in House Deli, with primary job in cooking in the morning.

Deli Clerk, *Safeway*

- Helped with housekeeping in House Deli, with primary job producing products and customer satisfaction.

June 2025 –
August 2025

Mechanical Engineering Intern, *H.F. Hauff*

- June 2021-
september 2021
- Courtesy Clerk, *Safeway*
- Worked to help customer satisfaction, and bagging for cashiers.
 - Helped with designing the frame of a project to compete with competitors' products. This work used SolidWorks to confirm calculations

Education

Dates From-
Current

Mechanical Engineering Technology, Ellensburg, *Central Washington University*

Classes	Proficiency
Computer Aided Design	Solidworks Associate Certification
Project Cost Analysis	Proficient
Statics	Proficient
Machining	Proficient
Lean Manufacturing	Proficient