

Physics 2

Aakash Jog

2014-15

Contents

1	Lecturer Information	4
2	Textbooks	4
I	Electrostatics	5
1	Coulomb's Law	5
2	Electric Field	10
2.1	Standard Electric Fields	10
2.2	Capacitors	10
3	Electric Dipoles	11
3.1	Electric Field Due to Electric Dipoles	12
3.1.1	Electric Field	12
4	Gauss' Law	12
5	Electric Potential	14



This work is licensed under the Creative Commons Attribution-NonCommercial-ShareAlike 4.0 International License. To view a copy of this license, visit <http://creativecommons.org/licenses/by-nc-sa/4.0/>.

6	Electrical Potential Energy	19
7	Differential Form of Gauss' Law	21
8	Poisson Equation	24
9	Vector Analyses in Cylindrical and Spherical Coordinate Systems	25
9.1	Cylindrical Coordinates	25
9.2	Spherical Coordinates	25
10	Conductors	25
11	Capacitors	27
11.1	Parallel Plate Capacitors	28
11.2	Concentric Spherical Capacitor	28
11.3	Capacitors in Series	29
11.4	Capacitors in Parallel	30
11.5	Energy Stored in a Capacitor	30
11.6	Energy Density	30
12	Dielectric Materials	33
12.1	Gauss' Law in Dielectric Materials	34
II	Electrodynamics	37
1	Currents	37
1.1	Continuity Law	37
1.2	Charge Carriers	38
2	Ohm's Law	38
3	Resistors	38
3.1	Resistivity	38
3.2	Resistors in Series	39
3.3	Resistors in Parallel	40
4	Power and Energy	40
5	RC Series Circuit	41
5.1	Charge on the Capacitor	41
5.2	Current in the Circuit	41

5.3	Power and Energy	42
III	Magnetism	46
1	Magnetic Force	46
2	Lorentz Force	46
2.1	Cyclotron	48
3	Thompson's Experiment	49
4	Biot-Savart Law	49
5	Ampere's Law	53
6	Differential Form of Ampere's Law	55
7	Faraday's Law	58
8	Inductors	62
8.1	Energy Stored in an Inductor	63
8.2	Energy Density	63
9	LR Series Circuit	64
9.1	Current in the Inductor	64
9.2	Mutual Inductance	64

1 Lecturer Information

Dr. Erez Pyetan

Office: Sharet 325

Telephone: 7565

E-mail: erezpyet@mail.tau.ac.il

2 Textbooks

1. D. Halliday, R. Resnick, and K. S. Krane: *Physics*, 5th edition, vol. 2 (Wiley)
2. D.J. Griffiths: *Introduction to Electrodynamics*

Part I

Electrostatics

1 Coulomb's Law

Law 1 (Coulomb's Law). *The force between two charged particles is directly proportional to the product of the charges of the particles, and inversely proportional to the square of the distance between them.*

$$\begin{aligned} F &\propto \frac{q_1 q_2}{r^2} \\ F &= k \frac{q_1 q_2}{r^2} \\ &= \frac{1}{4\pi\epsilon_0} \cdot \frac{q_1 q_2}{r^2} \end{aligned}$$

*The constant of proportionality is $k = 8.99 \times 10^9 \text{ N m}^2 \text{ C}^{-2}$.
 $\epsilon_0 = 8.8541878162 \times 10^{-12} \text{ C}^2 \text{ N}^{-1} \text{ m}^{-2}$ is called the permittivity of free space.
In vector notation,*


$$\vec{F}_{21} = \frac{1}{4\pi\epsilon_0} \frac{q_1 q_2}{r_{12}^2} \hat{r}_{12}$$

Charge is defined according to this law.

Exercise 1.

A charge q is placed at the origin. A charge $-2q$ is placed at 1 m from it, in the x direction. Find a point on the y -axis where the total force acting on a charge q' will be parallel to the x -axis.

Solution 1.



For the net force to be in the x direction, the components of F_1 and F_2 in the y direction must cancel each other out.


$$\begin{aligned}
 F_1 &= F_2 \sin \theta \\
 \therefore k \cdot \frac{(q')(-2q)}{y^2 + 1} \cdot \frac{y}{\sqrt{y^2 + 1}} &= k \cdot \frac{(q)(q')}{y^2} \\
 \therefore \frac{-2y}{(y^2 + 1)^{3/2}} &= \frac{1}{y^2} \\
 \therefore y &= \pm \sqrt{\frac{1}{2^{2/3} - 1}}
 \end{aligned}$$

Exercise 2.

A rod of length L has a uniformly distributed charge Q , with line charge density $\lambda = \frac{Q}{L}$. A point charge q is kept at a distance x as shown.



Solution 2.

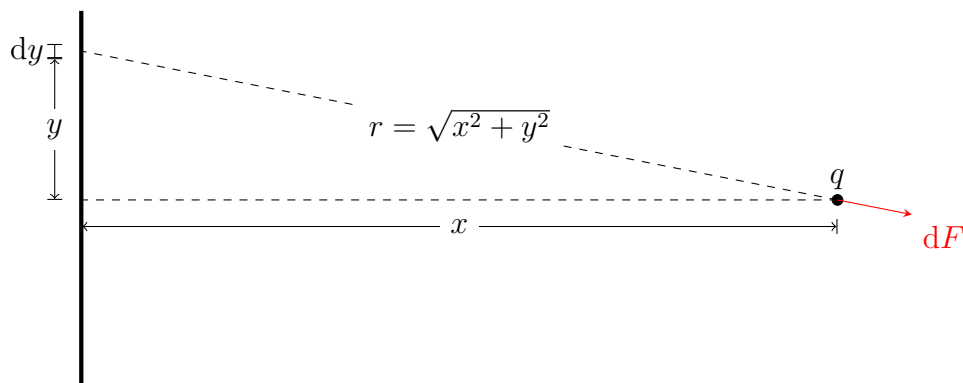

The y components of the forces of the elemental charges at y and $-y$ on q are cancelled out. Therefore, the net force is in the x direction only.

$$\begin{aligned}
 dF &= k \frac{(dQ)(q)}{r^2} \\
 dF_x &= dF \cos \theta \\
 &= k \frac{(dQ)(q)}{r^2} \cos \theta \\
 &= k \frac{(\lambda dy)(q)}{x^2 + y^2} \frac{x}{\sqrt{x^2 + y^2}} \\
 &= k \lambda q x \frac{dy}{(x^2 + y^2)^{3/2}} \\
 \therefore \vec{F} &= \hat{x} \int dF_x \\
 &= \hat{x} \lambda q x \int_{-L/2}^{L/2} \frac{dy}{(x^2 + y^2)^{3/2}}
 \end{aligned}$$

Substituting $y = x \tan \theta$ and $dy = x \sec^2 \theta d\theta$

$$\begin{aligned}
 \vec{F} &= \hat{x} \lambda q k x \int_{-\theta_0}^{\theta_0} \frac{1}{x^2} \cos \theta d\theta \\
 &= \hat{x} \frac{\lambda q k}{x} \int_{-\theta_0}^{\theta_0} \cos \theta d\theta
 \end{aligned}$$


Therefore,

$$\begin{aligned}
 \vec{F} &= \hat{x} \frac{2\lambda q k}{x} \sin \theta_0 \\
 &= \hat{x} \frac{2\lambda q k}{x} \frac{\frac{L}{2}}{\left(\left(\frac{L}{2} \right)^2 + x^2 \right)^{1/2}} \\
 &= \hat{x} \frac{2 \left(\frac{Q}{L} \right) q k}{x} \cdot \frac{\frac{L}{2}}{\left(\left(\frac{L}{2} \right)^2 + x^2 \right)^{1/2}} \\
 &= k \frac{Qq}{x \left(\left(\frac{L}{2} \right)^2 + x^2 \right)^{1/2}} \hat{x}
 \end{aligned}$$

Exercise 3.

A point charge q is kept at a distance z above a ring of radius R charged with $Q = 2\pi R\lambda$, where λ is the linear charge density. Find the force acting on q .

Solution 3.

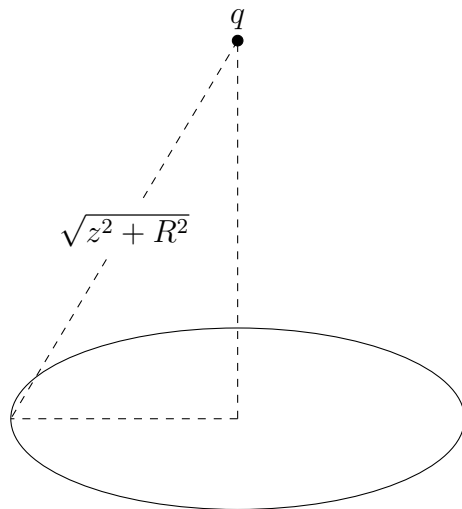

Due to the symmetry of the ring, the net force acting on q is in the z direction only.

$$\begin{aligned}
 dF_z &= dF \cos \theta \\
 &= k \frac{(dQ)(q)}{z^2 + R^2} \cos \theta \\
 &= k \frac{(dQ)(q)}{z^2 + R^2} \frac{z}{\sqrt{z^2 + R^2}} \\
 &= kqz \frac{dQ}{(z^2 + R^2)^{3/2}} \\
 \therefore \vec{F} &= \hat{z} \int dF_z \\
 &= \hat{z} kqz \frac{1}{(z^2 + R^2)^{3/2}} \int_0^Q dQ \\
 &= k \frac{Qqz}{(z^2 + R^2)^{3/2}} \vec{z}
 \end{aligned}$$

Exercise 4.

A point charge q is kept at a distance z above a disk of radius R charged with $Q = \pi R^2 \sigma$, where σ is the surface charge density. Find the force acting on q .

Solution 4.

The disk can be considered to be made up of elemental rings, with radii varying from 0 to R .

Therefore,

$$\begin{aligned}
 d\vec{F} &= k \frac{qQ_{\text{ring}}}{(z^2 + R^2)^{3/2}} \hat{z} \\
 &= k \frac{q(\sigma \cdot 2\pi r \cdot dr)}{(z^2 + R^2)^{3/2}} z \hat{z}
 \end{aligned}$$

Hence,

$$\begin{aligned}
\vec{F} &= \int d\vec{F} \\
&= \hat{z} \int_0^R k \frac{q\sigma \cdot 2\pi r z \cdot dr}{(z^2 + R^2)^{3/2}} \\
&= 2kzq\sigma\pi \left(\frac{1}{|z|} - \frac{1}{\sqrt{z^2 + R^2}} \right) \hat{z}
\end{aligned}$$

If $z \ll R$, i.e. for an infinite sheet,

$$F = 2q\sigma\pi k$$

2 Electric Field


Definition 1 (Electric field). The electric field at a point in space is the electric force felt by a charge of 1 C had it been kept there.

2.1 Standard Electric Fields

Line of charge	$\frac{1}{4\pi\epsilon_0} \frac{\lambda L}{r\sqrt{r^2 + \frac{L^2}{4}}}$
Infinite line of charge	$\frac{\lambda}{2\pi\epsilon_0 r}$
Ring of charge	$\frac{\lambda R z}{2\epsilon_0 (z^2 + R^2)^{3/2}}$
Infinite plane of charge	$\frac{\sigma}{2\epsilon_0}$

2.2 Capacitors

A parallel plate capacitor is constructed by arranging two infinite plates with surface charge density σ and $-\sigma$ respectively.

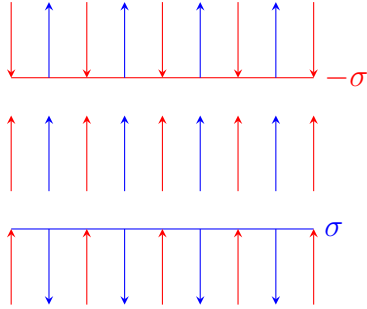


The electric field due to the plates are as shown. Therefore, the fields between the plates add up and the fields outside the plates cancel out. Therefore, the net field inside the capacitor is

$$\frac{\sigma}{2\epsilon_0} + \frac{\sigma}{2\epsilon_0} = \frac{\sigma}{\epsilon_0}$$

3 Electric Dipoles

Definition 2 (Electric dipole). Two charges, q and $-q$, separated by a distance d is called an electric dipole.




Definition 3 (Dipole moment). If two charges q and $-q$ are separated by a distance d , the dipole moment is defined as

$$\vec{P} \doteq q \cdot \vec{d}$$

where \vec{d} is the vector of length d pointing from $-q$ to q .

3.1 Electric Field Due to Electric Dipoles

3.1.1 Electric Field

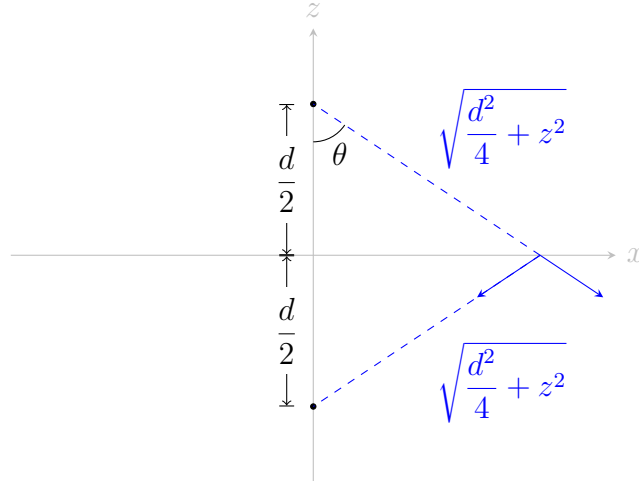

$$\begin{aligned}
 \vec{F} &= 2E_+ \cos \theta (-\hat{z}) \\
 &= 2 \cdot \frac{1}{4\pi\epsilon_0} \frac{q}{\left(\frac{d}{2}\right)^2 + x^2} \cdot \frac{\frac{d}{2}}{\left(\left(\frac{d}{2}\right)^2 + x^2\right)^{1/2}} (-\hat{z}) \\
 &= -\frac{1}{4\pi\epsilon_0} \frac{\vec{P}}{\left(\left(\frac{d}{2}\right)^2 + x^2\right)^{3/2}}
 \end{aligned}$$


4 Gauss' Law

Definition 4 (Electric flux). Electric flux is defined as the dot product of the electric field passing through a surface, and the area vector of the surface.

$$\Phi = \vec{E} \cdot \vec{A}$$

where the magnitude of the area vector is proportional to the area of the surface and the direction is perpendicular to the surface.

This can be modelled as water passing through a surface.



The flux of the water passing through the area A is $Av \cos \theta$.

Law 2 (Gauss' Law).


$$\oiint \vec{E} \cdot d\vec{A} = \frac{Q_{\text{inside}}}{\epsilon_0}$$

Exercise 5.

A hollow sphere of radius R has surface charge density σ . Find the field at a point at distance r from the centre of the sphere.

Solution 5.

Consider the imaginary Gaussian surface as a sphere with radius r .

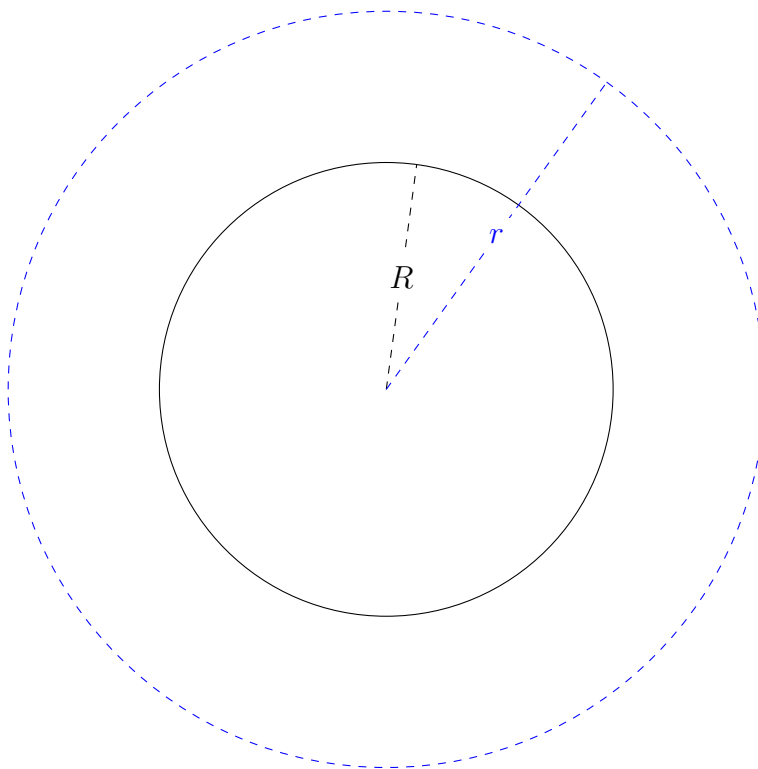

Using Gauss' Law over the Gaussian surface,

$$\begin{aligned}
\oiint \vec{E} \cdot d\vec{A} &= \frac{Q_{\text{total}}}{\varepsilon_0} \\
\therefore \oiint E dA &= \frac{Q_{\text{total}}}{\varepsilon_0} \\
\therefore E \oiint dA &= \frac{Q_{\text{total}}}{\varepsilon_0} \\
\therefore E \cdot 4\pi r^2 &= \frac{Q_{\text{total}}}{\varepsilon_0} \\
\therefore \vec{E} &= \frac{1}{4\pi\varepsilon_0} \frac{Q_{\text{total}}}{r^2} \hat{r}
\end{aligned}$$

Similarly for $r < R$, $E = 0$.

5 Electric Potential

Definition 5 (Electrical Potential). The electric potential due to a point charge q is

$$\varphi(\vec{r}) = \frac{1}{4\pi\varepsilon_0} \frac{q}{r} + c$$

If a charge q is moved from point A to B,


$$\begin{aligned}
W_{A \rightarrow B} &= \int_{\vec{r}_A}^{\vec{r}_B} \vec{E} \cdot d\vec{r} \\
&= \int_{r_A}^{r_B} \frac{1}{4\pi\varepsilon_0} \frac{q}{r^2} dr \\
&= -\frac{1}{4\pi\varepsilon_0} \frac{q}{r} \Big|_{r_A}^{r_B} \\
&= \frac{1}{4\pi\varepsilon_0} \frac{q}{r_A} - \frac{1}{4\pi\varepsilon_0} \frac{q}{r_B}
\end{aligned}$$

Therefore,

$$\begin{aligned}
W_{A \rightarrow B} &= \varphi(\vec{r}_A) - \varphi(\vec{r}_B) \\
\therefore \varphi(\vec{r}_B) - \varphi(\vec{r}_A) &= - \int_{\vec{r}_A}^{\vec{r}_B} \vec{E} \cdot d\vec{r}
\end{aligned}$$

Exercise 6.

An electric dipole with charges q and $-q$ is placed on the z -axis with distance d between the charges. Find the field at a general point in space. Find points at which the electric potential is zero.

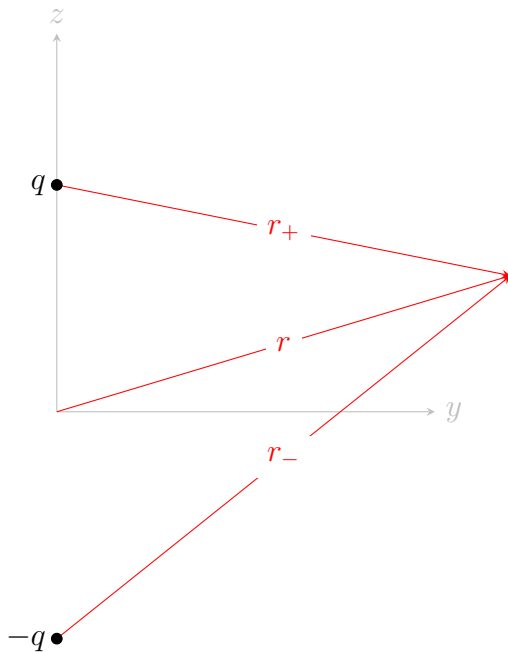Solution 6.

Let the electric potential at infinity be zero.

$$\begin{aligned}\varphi(\vec{r}) &= \frac{1}{4\pi\epsilon_0} \left(\frac{q}{r_+} + \frac{-q}{r_-} \right) \\ &= \frac{1}{4\pi\epsilon_0} \frac{q(r_- - r_+)}{r_- \cdot r_+}\end{aligned}$$

Therefore, the potential is zero only if $r_+ = r_-$. Therefore, for all points on the xy -plane, the potential is zero.

Exercise 7.

Find the electric potential at a point at distance r on the equator of a line of charge of length L and uniform line charge density λ .

Solution 7.

Consider an elemental charge dq with length dz at a distance z from the centre of the line.

$$dq = \lambda dz$$

Therefore,

$$\begin{aligned}\varphi(r) &= \int \frac{1}{4\pi\epsilon_0} \frac{q}{\sqrt{z^2 + r^2}} \\ &= \int_{-L/2}^{L/2} \frac{1}{4\pi\epsilon_0} \frac{\lambda dz}{\sqrt{z^2 + r^2}} \\ &= \frac{\lambda}{4\pi\epsilon_0} \ln \left(\frac{\sqrt{L^2 + 4r^2} + L}{\sqrt{L^2 + 4r^2} - L} \right)\end{aligned}$$

Exercise 8.

Find the electric potential due to an infinite line of charge.

Solution 8.

For an infinite line of charge, the charge at infinity is not zero. Therefore, it is wrong to assume that the electric potential at infinity is zero. Therefore, the result for a finite line of charge cannot be used to find the potential due to an infinite line of charge.

Therefore, the potential needs to be calculated using the electric field.

$$\begin{aligned}\varphi(r) - \varphi(r_0) &= - \int_{r_0}^r \vec{E} \cdot d\vec{r} \\ &= - \int_{r_0}^r E dr \\ &= - \int_{r_0}^r \frac{\lambda}{2\pi\epsilon_0 r} dr \\ &= - \frac{\lambda}{2\pi\epsilon_0} \ln r \Big|_{r_0}^r \\ &= \frac{\lambda}{2\pi\epsilon_0} (\ln r_0 - \ln r) \\ \therefore \varphi(r) &= \varphi(r_0) + \frac{\lambda}{2\pi\epsilon_0} (\ln r_0 - \ln r)\end{aligned}$$

Exercise 9.

Find the electric potential due to a hollow sphere with surface charge density σ and radius R .

Solution 9.

Let the electric potential at infinity be zero.

$$\vec{E} = \begin{cases} 0 & ; \quad r < R \\ \frac{1}{4\pi\epsilon_0} \frac{q}{r^2} & ; \quad r > R \end{cases}$$

Therefore, if $r > R$,

$$\begin{aligned}
 \varphi(r) - \varphi(\infty) &= - \int_{\infty}^r \vec{E} \cdot d\vec{r} \\
 &= \int_r^{\infty} E dr \\
 &= \int_r^{\infty} \frac{1}{4\pi\epsilon_0} \frac{q}{r^2} dr \\
 &= - \frac{1}{4\pi\epsilon_0} \frac{q}{r^2} \Big|_r^{\infty} \\
 \therefore \varphi(r) &= \frac{1}{4\pi\epsilon_0} \frac{q}{r}
 \end{aligned}$$

If $r < R$,

$$\begin{aligned}
 \varphi(r) - \varphi(R) &= \int_R^r \vec{E} \cdot d\vec{r} \\
 &= \int_R^r E dr \\
 &= \int_R^r 0 dr \\
 \therefore \varphi(r) &= \varphi(R) \\
 &= \frac{1}{4\pi\epsilon_0} \frac{q}{R}
 \end{aligned}$$

Therefore, the potential is constant.

Therefore,

$$\varphi = \begin{cases} \frac{1}{4\pi\epsilon_0} \frac{q}{R} & ; \quad r \leq R \\ \frac{1}{4\pi\epsilon_0} \frac{q}{r} & ; \quad r \geq R \end{cases}$$

Exercise 10.

Find the electric potential due a ring of charge with radius R and charge q , at a distance z from its centre, on its axis of symmetry.

Solution 10.

Let the electric potential at infinity be zero.

$$\begin{aligned}\varphi_{\text{ring}} &= \int \frac{1}{4\pi\epsilon_0} \frac{dq}{r} \\ &= \int_0^q \frac{1}{4\pi\epsilon_0} \frac{dq}{\sqrt{R^2 + z^2}} \\ &= \frac{1}{4\pi\epsilon_0} \frac{1}{\sqrt{R^2 + z^2}}\end{aligned}$$

Exercise 11.

Find the electric potential due a disk of charge with radius R and charge q , at a distance z from its centre, on its axis of symmetry.

Solution 11.

Let the electric potential at infinity be zero.


Consider an elemental ring of thickness dr and radius r . Therefore,

$$\begin{aligned}\varphi_{\text{disk}} &= \int d\varphi_{\text{ring}} \\ &= \int \frac{1}{4\pi\epsilon_0} \frac{dq_{\text{ring}}}{\sqrt{r^2 + z^2}} \\ &= \int_0^R \frac{1}{4\pi\epsilon_0} \frac{2\pi r dr \sigma}{\sqrt{r^2 + z^2}} \\ &= \frac{\sigma}{2\epsilon} \left(\sqrt{R^2 + z^2} - |z| \right)\end{aligned}$$

6 Electrical Potential Energy

Exercise 12.

Three charges, q , $-4q$, $2q$ are placed on the vertices of an equilateral triangle of side a . Find the energy in the system.

Solution 12.

The energy in the system is the amount of energy required to build the system by bringing each of the charges from infinity to its position, one by one.

Let the positions of q , $2q$ and $-4q$ be A, B and C respectively.

The energy required to bring the first charge, q , from infinity to A is zero, as there are no forces acting on it.

The energy required to bring the second charge, $2q$, from infinity to B is

$$\begin{aligned}
 U_{2q} &= - \int_{\infty}^{\vec{r}_B} \vec{F} \cdot d\vec{r} \\
 &= - \int_{\infty}^{\vec{r}_B} (2q) \cdot \vec{E} \cdot d\vec{r} \\
 &= -(2q) \int_{\infty}^{\vec{r}_B} \vec{E} \cdot d\vec{r} \\
 &= (2q) (\varphi(B) - \varphi(\infty)) \\
 &= (2q) \cdot \varphi(B)
 \end{aligned}$$

where $\varphi(B)$ is potential at point B due to the existing charges, i.e. q . Similarly, the energy required to bring the third charge, $-4q$, from infinity to C is $(-4q) \cdot \varphi(C)$, where $\varphi(C)$ is the potential at point C due to the existing charges, i.e. q and $2q$.

Therefore, the total energy required is

$$U = (0) + (2q) \left(\frac{1}{4\pi\epsilon_0} \frac{q}{a^2} \right) + (-4q) \left(\frac{1}{4\pi\epsilon_0} \frac{q}{a^2} + \frac{1}{4\pi\epsilon_0} \frac{2q}{a^2} \right)$$

Exercise 13.

Find the potential energy in a solid sphere of charge, with charge density ρ and radius R .

Solution 13.

Consider a solid sphere of charge with ρ and r . Consider an elemental shell of thickness dr on this sphere.

Therefore,

$$\begin{aligned} dV &= 4\pi r^2 dr \\ \therefore dq &= \rho \cdot dV \\ &= 4\pi \rho r^2 dr \end{aligned}$$

Therefore,

$$\begin{aligned} dU &= \frac{1}{4\pi\epsilon_0} \frac{q_{\text{inside}}}{r} dq \\ &= \frac{1}{4\pi\epsilon_0} \frac{\frac{4}{3}\pi r^3 \rho}{r} \cdot 4\pi r^2 dr \rho \\ \therefore U &= \int_0^R \frac{4\pi\rho^2}{3\epsilon_0} r^4 dr \\ &= \frac{4\pi\rho^2 R^5}{15\epsilon_0} \end{aligned}$$

7 Differential Form of Gauss' Law

Law 3 (Differential Form of Gauss' Law).

$$\vec{\nabla} \cdot \vec{E} = \frac{\rho}{\epsilon_0}$$

Proof. The volume of the elemental body used for integration is denoted by d^3r .

For Cartesian coordinate systems, $d^3r = dx dy dz$.

For cylindrical coordinate systems, $d^3r = r d\theta d\varphi dz$.

For spherical coordinate systems, $d^3r = r^2 \sin \theta dr d\theta d\varphi$.

$$\begin{aligned}\iint_{\partial V} \vec{E} \cdot d\vec{A} &= \frac{1}{\varepsilon_0} Q_{\text{inside}} \\ &= \frac{1}{\varepsilon_0} \iiint_V \rho \, d^3 r\end{aligned}$$

If a body with volume V and surface area S is cut into two parts, with volumes V_1 and V_2 and surface area S_1 and S_2 respectively,

$$V = V_1 + V_2$$

However, the surface area increases,

$$S = S_1 + S_2 + 2A \neq S_1 + S_2$$

where A is the area of the new surface created due to the cut. Therefore,

$$\iint_{S_1} \vec{E} \cdot d\vec{A} + \iint_{S_2} \vec{E} \cdot d\vec{A} = \iint_{\partial V} \vec{E} \cdot d\vec{A}$$

Consider a small cuboid of sides dx , dy , dz . Let the vertex of the cube, nearest to the origin be (x, y, z) .

Therefore,

$$\begin{aligned}
\Phi &= E_z \left(x + \frac{dx}{2}, y + \frac{dy}{2}, z + dz \right) dx dy \\
&\quad - E_z \left(x + \frac{dx}{2}, y + \frac{dy}{2}, z \right) dx dy \\
&\quad + E_y \left(x + \frac{dx}{2}, y + dy, z + \frac{dz}{2} \right) dx dz \\
&\quad - E_y \left(x + \frac{dx}{2}, y, z + \frac{dz}{2} \right) dx dz \\
&\quad + E_x \left(x + dx, y + \frac{dy}{2}, z + \frac{dz}{2} \right) dy dz \\
&\quad - E_x \left(x, y + \frac{dy}{2}, z + \frac{dz}{2} \right) dy dz \\
&= \frac{E_z \left(x + \frac{dx}{2}, y + \frac{dy}{2}, z + dz \right) - E_z \left(x + \frac{dx}{2}, y + \frac{dy}{2}, z \right)}{dz} dx dy \\
&\quad + \frac{E_y \left(x + \frac{dx}{2}, y + dy, z + \frac{dz}{2} \right) - E_y \left(x + \frac{dx}{2}, y, z + \frac{dz}{2} \right)}{dy} dx dz \\
&\quad + \frac{E_x \left(x + dx, y + \frac{dy}{2}, z + \frac{dz}{2} \right) - E_x \left(x, y + \frac{dy}{2}, z + \frac{dz}{2} \right)}{dx} dy dz \\
&= \left(\frac{\partial E_x}{\partial x} \Big|_{\left(x + \frac{dx}{2}, y + \frac{dy}{2}, z\right)} \right. \\
&\quad + \frac{\partial E_y}{\partial y} \Big|_{\left(x + \frac{dx}{2}, y, z + \frac{dz}{2}\right)} \\
&\quad \left. + \frac{\partial E_z}{\partial z} \Big|_{\left(x + \frac{dx}{2}, y + \frac{dy}{2}, z\right)} \right) dx dy dz
\end{aligned}$$

Therefore

$$\begin{aligned}
 \operatorname{div} \vec{E} &= \lim_{dx \rightarrow 0, dy \rightarrow 0, dz \rightarrow 0} \frac{\Phi}{dx \, dy \, dz} \\
 &= \left(\frac{\partial E_x}{\partial x} + \frac{\partial E_y}{\partial y} + \frac{\partial E_z}{\partial z} \right) \bigg|_{(x,y,z)} \\
 &= \vec{\nabla} \cdot \vec{E}
 \end{aligned}$$

Therefore,

$$\vec{\nabla} \cdot \vec{E} = \frac{\rho}{\varepsilon_0}$$

□

8 Poisson Equation

Law 4 (Poisson Equation).

$$\Delta \varphi = \nabla^2 \varphi = -\frac{\rho}{\varepsilon_0}$$

$$\begin{aligned}
 \vec{E} &= -\vec{\nabla} \varphi \\
 \therefore \operatorname{div} \vec{E} &= \vec{\nabla} \cdot (-\vec{\nabla} \varphi) \\
 &= -\left(\frac{\partial^2 \varphi}{\partial x^2} + \frac{\partial^2 \varphi}{\partial y^2} + \frac{\partial^2 \varphi}{\partial z^2} \right) \\
 &= -\nabla^2 \varphi \\
 &= -\Delta \varphi \\
 \therefore \Delta \varphi &= -\frac{\rho}{\varepsilon_0}
 \end{aligned}$$

Definition 6 (Laplacian). ∇^2 is called the Laplacian.

9 Vector Analyses in Cylindrical and Spherical Coordinate Systems

9.1 Cylindrical Coordinates

$$\begin{aligned}
\vec{\nabla} f &= \frac{\partial f}{\partial r} \hat{r} + \frac{1}{r} \frac{\partial f}{\partial \theta} \hat{\theta} + \frac{\partial f}{\partial z} \hat{z} \\
\vec{\nabla} \cdot \vec{F} &= \frac{1}{r} \frac{\partial}{\partial r} (r F_r) + \frac{1}{r} \frac{\partial F_\theta}{\partial \theta} + \frac{\partial F_z}{\partial z} \\
\vec{\nabla} \times \vec{F} &= \left(\frac{1}{r} \frac{\partial F_z}{\partial \theta} - \frac{\partial F_\theta}{\partial z} \right) \hat{r} + \left(\frac{\partial F_r}{\partial z} - \frac{\partial F_z}{\partial r} \right) \hat{\theta} + \frac{1}{r} \left(\frac{\partial}{\partial r} (r F_\theta) - \frac{\partial F_r}{\partial \theta} \right) \hat{z} \\
\nabla^2 f &= \frac{1}{r} \frac{\partial}{\partial r} \left(r \frac{\partial f}{\partial r} \right) + \frac{1}{r^2} \frac{\partial^2 f}{\partial \theta^2} + \frac{\partial^2 f}{\partial z^2}
\end{aligned}$$

9.2 Spherical Coordinates


$$\begin{aligned}
\vec{\nabla} f &= \frac{\partial f}{\partial r} \hat{r} + \frac{1}{r} \frac{\partial f}{\partial \theta} \hat{\theta} + \frac{1}{r \sin \theta} \frac{\partial f}{\partial \varphi} \hat{\varphi} \\
\vec{\nabla} \cdot \vec{F} &= \frac{1}{r^2} \frac{\partial}{\partial r} (r^2 F_r) + \frac{1}{r \sin \theta} \frac{\partial}{\partial \theta} (F_\theta \sin \theta) + \frac{1}{r \sin \theta} \frac{\partial F_\varphi}{\partial \varphi} \\
\vec{\nabla} \times \vec{F} &= \frac{1}{r \sin \theta} \left(\frac{\partial}{\partial \theta} (F_\varphi \sin \theta) - \frac{\partial F_\theta}{\partial \varphi} \right) \hat{r} \\
&\quad + \frac{1}{r} \left(\frac{1}{\sin \theta} \frac{\partial F_r}{\partial \varphi} - \frac{\partial}{\partial r} (r F_\varphi) \right) \hat{\theta} \\
&\quad + \frac{1}{r} \left(\frac{\partial}{\partial r} (r F_\theta) - \frac{\partial F_r}{\partial \theta} \right) \hat{\varphi} \\
\nabla^2 f &= \frac{1}{r^2} \frac{\partial}{\partial r} \left(r^2 \frac{\partial f}{\partial r} \right) + \frac{1}{r^2 \sin \theta} \frac{\partial}{\partial \theta} \left(\sin \theta \frac{\partial f}{\partial \theta} \right) + \frac{1}{r^2 \sin^2 \theta} \frac{\partial^2 f}{\partial \varphi^2}
\end{aligned}$$

10 Conductors

In an electrostatic condition, the field inside a conductor is zero. If it is not, as the conductor allows movement of charged particles, there will be a current and the condition will not be electrostatic.

Exercise 14.

A point charge q is kept inside a cavity in a conducting sphere. Find the charge on the surfaces of the sphere.

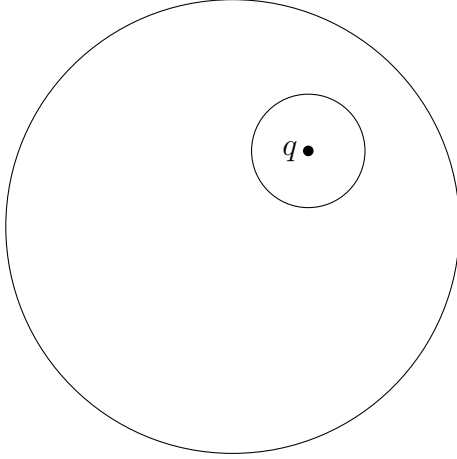**Solution 14.**

As the sphere is neutral, $\varphi = 0$.

Therefore, $-\frac{\rho}{\varepsilon_0} = 0$.

Therefore, by the Poisson equation,

$$\begin{aligned}\nabla^2 \varphi &= 0 \\ \therefore \frac{1}{r^2} \frac{\partial}{\partial r} \left(r^2 \frac{\partial \varphi}{\partial r} \right) &= 0 \\ \therefore \frac{\partial}{\partial r} \left(r^2 \frac{\partial \varphi}{\partial r} \right) &= 0 \\ \therefore r^2 \frac{\partial \varphi}{\partial r} &= c \\ \therefore \frac{\partial \varphi}{\partial r} &= \frac{c}{r^2} \\ \therefore \varphi &= \int \frac{c}{r^2} dr \\ &= -\frac{c}{r} + d\end{aligned}$$

As $\varphi(\infty) = 0$, $d = 0$. Therefore,

$$\varphi = -\frac{c}{r}$$

Therefore,

$$\begin{aligned}
\varphi(R) &= -\frac{c}{R} \\
\therefore c &= -R\varphi(R) \\
\therefore \vec{E} &= -\vec{\nabla}\varphi(r) \\
&= -\frac{\partial\varphi}{\partial r}\hat{r} \\
&= -\left(-\frac{R\varphi(R)}{r^2}\right)\hat{r} \\
&= \frac{R\varphi(R)}{r^2}\hat{r}
\end{aligned}$$

Therefore, the field is constant all over the outer surface.

Therefore,

$$\therefore \sigma = \frac{q}{4\pi R^2}$$

11 Capacitors

A capacitor is constructed by arranging two conductors, charged with opposite charges.

Suppose the charges on the conductors are $+Q$ and $-Q$. Therefore,


$$\begin{aligned}
V &= \varphi(+)-\varphi(-) \\
&= -\int_{(-)}^{(+)} \vec{E} \cdot d\vec{l} \\
&= \int_{(+)}^{(-)} \vec{E} \cdot d\vec{l} \\
\therefore V &\propto Q
\end{aligned}$$

Definition 7 (Capacitance). Let the charges on the opposite terminals of a capacitor be $+Q$ and $-Q$ respectively. The ratio between Q and the potential difference between the terminals is called the capacitance of the capacitor.

$$C = \frac{Q}{V}$$

11.1 Parallel Plate Capacitors

Consider a capacitor made of two conducting plates of surface area A each. Let the distance between them be d . Let the charge distribution on the plates be σ and $-\sigma$ respectively.

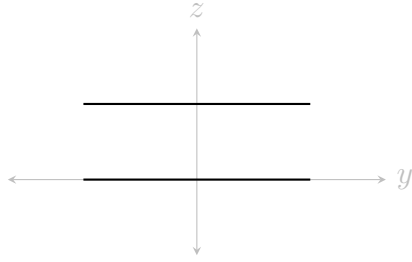

If d is very small compared to A , the plates can be considered to be infinite.

Therefore,

$$\vec{E} = \begin{cases} \frac{\sigma}{\epsilon_0} \hat{z} & ; \quad 0 < z < d \\ 0 & ; \quad z < 0 \text{ or } z > d \end{cases}$$

Therefore,

$$\begin{aligned} C &= \frac{Q}{V} \\ &= \frac{\sigma A}{Ed} \\ &= \frac{\sigma A}{\frac{\sigma}{\epsilon_0} \cdot d} \\ &= \frac{A\epsilon_0}{d} \end{aligned}$$


11.2 Concentric Spherical Capacitor

Consider a conducting sphere, with radius R_1 and charge $+Q$, surrounded by a concentric conducting shell of radius R_2 and charge $-Q$. Therefore, the potential difference between the any point at R_1 from the centre and any

point at R_2 from the centre is

$$\begin{aligned}
 V &= \varphi(R_1) - \varphi(R_2) \\
 &= - \int_{R_2}^{R_1} \vec{E} \cdot d\vec{r} \\
 &= \int_{R_1}^{R_2} \vec{E} \cdot d\vec{r} \\
 &= \int_{R_1}^{R_2} E dr \\
 &= \int_{R_1}^{R_2} \frac{Q}{4\pi\epsilon_0 r^2} dr \\
 &= - \frac{Q}{4\pi\epsilon_0 r} \Big|_{R_1}^{R_2} \\
 &= \frac{Q}{4\pi\epsilon_0} \left(\frac{1}{R_1} - \frac{1}{R_2} \right) \\
 \therefore C &= \frac{Q}{V} \\
 &= \frac{4\pi\epsilon_0}{\frac{1}{R_1} - \frac{1}{R_2}} \\
 &= 4\pi\epsilon_0 \frac{R_1 R_2}{R_2 - R_1}
 \end{aligned}$$

11.3 Capacitors in Series



$$\begin{aligned}
V &= (\varphi_A - \varphi_C) + (\varphi_C - \varphi_B) \\
&= \frac{Q}{C_1} + \frac{Q}{C_2} \\
\therefore \frac{Q}{C_{\text{eq}}} &= \frac{Q}{C_1} + \frac{Q}{C_2} \\
\therefore \frac{1}{C_{\text{eq}}} &= \frac{1}{C_1} + \frac{1}{C_2}
\end{aligned}$$

11.4 Capacitors in Parallel

$$C_{\text{eq}} = C_1 + C_2$$

11.5 Energy Stored in a Capacitor

Consider a capacitor with potential difference V and charge Q . The energy required to move an elemental charge dq from the negatively charged plate to the positively charged plate is

$$\begin{aligned}
dU &= V dq \\
&= \frac{q}{C} dq \\
\therefore U &= \int_0^Q \frac{q}{C} dq \\
&= \frac{Q^2}{2C} \\
&= \frac{1}{2} QV \\
&= \frac{1}{2} CV^2
\end{aligned}$$

11.6 Energy Density

Consider a parallel plate capacitor, with plates of area A , with distance d between them and charge $+Q$ and $-Q$ respectively. The electric field between

them is

$$\begin{aligned} E &= \frac{\sigma}{\varepsilon_0} \\ &= \frac{Q}{\varepsilon_0 A} \\ \therefore Ed &= \frac{Qd}{\varepsilon_0 A} \end{aligned}$$

As $V = Ed$,

$$\begin{aligned} V &= \frac{Qd}{\varepsilon_0 A} \\ \therefore \frac{A\varepsilon_0}{d} &= \frac{Q}{V} \\ \therefore \frac{A\varepsilon_0}{d} &= C \end{aligned}$$

Therefore,

$$\begin{aligned} U &= \frac{1}{2} CV^2 \\ &= \frac{1}{2} \varepsilon_0 \frac{A}{d} E^2 d^2 \\ &= \frac{1}{2} (Ad) \varepsilon_0 E^2 \\ \therefore \frac{U}{Ad} &= \frac{1}{2} \varepsilon_0 E^2 \end{aligned}$$

Therefore, as Ad is the volume of the space between the plates of the capacitor, $\frac{U}{Ad}$ is called the energy density. Therefore,

$$u = \frac{1}{2} \varepsilon_0 E^2$$

In general, for a charged body with volume charge density ρ , assuming $\varphi(\infty) = 0$,

$$U = \iiint_V \frac{1}{2} \rho \varphi \, d^3 r$$

As $\rho = -\varepsilon_0 \nabla^2 \varphi$,

$$U = \iiint_V \frac{1}{2} (-\varepsilon_0 \nabla^2 \varphi) \varphi \, d^3 r$$

$$\begin{aligned}
\vec{E} &= -\vec{\nabla} \varphi \\
\therefore \nabla^2 \varphi &= \vec{\nabla} \cdot (\vec{\nabla} \varphi) \\
\therefore (\nabla^2 \varphi) \varphi &= \vec{\nabla} \cdot (\vec{\nabla} \varphi) \varphi
\end{aligned}$$

$$\begin{aligned}
\vec{\nabla} \cdot (\varphi (\vec{\nabla} \varphi)) &= (\vec{\nabla} \varphi) (\vec{\nabla} \varphi) + \varphi \vec{\nabla} \cdot (\vec{\nabla} \varphi) \\
&= (-\vec{E}) (-\vec{E}) + \varphi \nabla^2 \varphi \\
\therefore \nabla^2 \varphi &= \vec{\nabla} \cdot (-\varphi \vec{E}) - E^2
\end{aligned}$$

Therefore, substituting in U ,

$$\begin{aligned}
U &= \iiint_V \left(-\frac{1}{2} \varepsilon_0 \right) \left(\vec{\nabla} \cdot (-\varphi \vec{E}) - E^2 \right) d^3 r \\
&= \frac{1}{2} \varepsilon_0 \iiint_V \vec{\nabla} \cdot (\varphi \vec{E}) d^3 r + \iiint_V \frac{1}{2} \varepsilon_0 E^2 d^3 r \\
&= \frac{1}{2} \varepsilon_0 \iint_{\partial V} \varphi \vec{E} \cdot d\vec{A} + \iiint_V \frac{1}{2} \varepsilon_0 E^2 d^3 r
\end{aligned}$$

As there are no charges at infinity, the electric field at infinity is zero. Therefore, the flux through the large surface is zero. Therefore, $\varepsilon_0 \iint_{\partial V} \varphi \vec{E} \cdot d\vec{A} = 0$.

Also, according to the initial assumption, $\varphi(\infty) = 0$.

$$\begin{aligned}
\therefore U &= \iiint_V \frac{1}{2} \varepsilon_0 E^2 d^3 r \\
\therefore u &= \frac{1}{2} \varepsilon_0 E^2
\end{aligned}$$

Exercise 15.

Find the potential energy contained in a sphere of charge with radius R .

Solution 15.

$$E = \begin{cases} \frac{\rho r}{3\varepsilon_0} & ; \quad r < R \\ \frac{\frac{4}{3}\pi R^3 \rho}{4\pi\varepsilon_0 r^2} & ; \quad r > R \end{cases}$$

Therefore

$$\begin{aligned} U &= \iiint_V \frac{1}{2} \varepsilon_0 E^2 \, d^3 r \\ &= \int_0^R \frac{1}{2} \varepsilon_0 \left(\frac{\rho r}{3\varepsilon_0} \right)^2 \cdot 4\pi r^2 \, dr + \int_R^\infty \frac{1}{2} \varepsilon_0 \left(\frac{R^3 \rho}{3\varepsilon_0 r^2} \right) 4\pi r^2 \, dr \\ &= \frac{2\pi\rho^2}{9\varepsilon_0} \int_0^R r^4 \, dr + \frac{2\pi\rho^2 R^6}{9\varepsilon_0} \int_R^\infty \frac{1}{r^2} \, dr \\ &= \frac{2\pi\rho^2}{9\varepsilon_0} \left(\frac{R^5}{5} \right) + \frac{2\pi\rho^2 R^6}{9\varepsilon_0} \left(-\frac{1}{r} \right) \Big|_R^\infty \\ &= \frac{2\pi\rho^2 R^5}{9\varepsilon_0} \left(\frac{1}{5} + 1 \right) \\ &= \frac{2\pi\rho^2 R^5}{9\varepsilon_0} \cdot \frac{6}{5} \\ &= \frac{4\pi\rho^2 R^5}{15\varepsilon_0} \end{aligned}$$

12 Dielectric Materials

Definition 8 (Dielectric constant or relative permittivity). If the electric field in a dielectric material across some voltage and some distance is E , and the electric field in an identical setup, with a vacuum is E_0 , the ratio between E_0 and E is called the dielectric constant of the material or the relative permittivity of the material.

$$\kappa_E = \frac{E_0}{E}$$

Consider a parallel plate capacitor with a dielectric slab of κ_E inserted between its plates.

Let the surface charge densities on each of the plates be $+\sigma_{\text{free}}$ and $-\sigma_{\text{free}}$, and charges $+Q$ and $-Q$.

Let the field inside the capacitor, if the dielectric slab is absent, be E_0 , and the field inside the capacitor, if the dielectric slab is present be E .

Consider a cuboid Gaussian surface at the interface of the dielectric slab and the plate with charge density $+\sigma_{\text{free}}$.

As the electric field entering the Gaussian surface is more than the electric field exiting it, there must be some negative charge on the interface.

Let the surface charge density of this bound charge be $-\sigma_{\text{bound}}$.

Therefore, the net field inside the capacitor is

$$E = \frac{\sigma_{\text{free}} - \sigma_{\text{bound}}}{\varepsilon_0}$$

Definition 9 (Permittivity of a dielectric).

$$\begin{aligned} \frac{C}{C_0} &= \frac{\frac{Q}{V}}{\frac{Q}{V_0}} \\ &= \frac{V_0}{V} \\ &= \frac{E_0 d}{Ed} \\ &= \frac{E_0}{E} \\ &= \kappa_E \\ \therefore C &= C_0 \kappa_E \\ &= \varepsilon_0 \kappa_E \frac{A}{d} \end{aligned}$$

$\varepsilon = \varepsilon_0 \kappa_E$ is called the permittivity of the dielectric.

12.1 Gauss' Law in Dielectric Materials

$$\begin{aligned} \iint \vec{E}_0 \cdot d\vec{A} &= \frac{Q_{\text{free}}}{\varepsilon_0} \\ \therefore \iint \kappa_E \vec{E} \cdot d\vec{A} &= \frac{Q_{\text{free}}}{\varepsilon_0} \\ \therefore \iint \kappa_E \varepsilon_0 \vec{E} \cdot d\vec{A} &= Q_{\text{free}} \end{aligned}$$

Definition 10 (Electric displacement field).

$$\vec{D} = \varepsilon_0 \kappa_E \vec{E} = \varepsilon \vec{E}$$


is called the electric displacement field.

Therefore,

$$\begin{aligned} \iint_{\partial V} \vec{D} \cdot d\vec{A} &= Q_{\text{free}} \\ \therefore \iiint_V \vec{\nabla} \cdot \vec{D} \, d^3 r &= \rho_{\text{free}} \\ \therefore \vec{\nabla} \cdot \vec{D} &= \rho_{\text{free}} \end{aligned}$$

Exercise 16.

A slab of dielectric material, with thickness x is inserted in a parallel plate capacitor, with plates of surface area A and distance d between them, as shown.

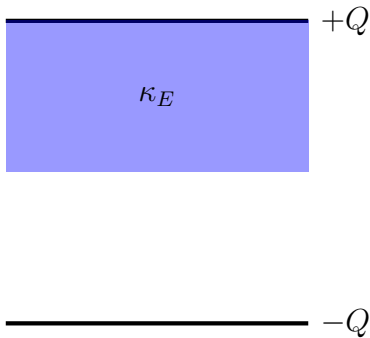

Find the charge density on the interface of the dielectric slab and the effective capacitance.

Solution 16.

As the charge on the plates is $+Q$ and $-Q$ respectively, and as the area of the plates is A ,

$$\sigma_{\text{free}} = \frac{Q}{A}$$

Consider a cuboid Gaussian surface at the interface the dielectric slab and the free space, inside the capacitor. As the field entering the Gaussian surface

is less than the field exiting it, there must a bound positive charge at the interface. Let the surface charge density of this bound charge be $+\sigma_b$.

$$\begin{aligned}
 E_2 S - E_1 S &= \frac{\sigma_b A}{\varepsilon_0} \\
 \therefore \frac{Q}{\varepsilon_0 A} - \frac{Q}{\varepsilon_0 \kappa_E A} &= \frac{\sigma_b}{\varepsilon_0} \\
 \therefore \sigma_b &= \frac{Q}{A} \left(1 - \frac{1}{\kappa_E} \right) \\
 &= \frac{Q}{A} \cdot \frac{\kappa_E - 1}{\kappa_E} \\
 \therefore \sigma_b &\leq \sigma_{\text{free}}
 \end{aligned}$$

$$\begin{aligned}
 C &= \frac{Q}{V} \\
 &= \frac{Q}{E_1 x + E_2 (d - x)} \\
 &= \frac{\cancel{Q}}{\frac{\cancel{Q}}{\varepsilon_0 \kappa_A} x + \frac{\cancel{Q}}{\varepsilon_0 A} (d - x)} \\
 &= \frac{\varepsilon_0 A}{\frac{x}{k} + d - x} \\
 &= \varepsilon_0 \frac{A}{d - x \left(1 - \frac{1}{k} \right)}
 \end{aligned}$$

Part II

Electrodynamics

1 Currents

Definition 11 (Current). Current is defined as the rate of charge passing through a cross-sectional area.

$$I = \frac{dq}{dt}$$

Definition 12 (Current density).

$$\vec{J} = \frac{I}{A}$$

\vec{J} is called the current density.

Therefore, the current is the flux of \vec{J} .

1.1 Continuity Law

$$\begin{aligned} Q &= \iiint_V \rho(x, y, z, t) \, d^3 r \\ \therefore \frac{dQ}{dt} &= \frac{d}{dt} \iiint_V \rho(x, y, z, t) \, d^3 r \\ &= \iiint_V \frac{d\rho}{dt} \, d^3 r \end{aligned}$$

$$I = \iint_{\partial V} \vec{J} \cdot d\vec{a}$$

$$\begin{aligned} I &= - \frac{dQ}{dt} \\ \therefore \iint_{\partial V} \vec{J} \cdot d\vec{A} &= \iiint_V - \frac{\partial \rho}{\partial t} \, d^3 r \end{aligned}$$

Therefore, by the divergence theorem,

$$\begin{aligned}\iiint_V \vec{\nabla} \cdot \vec{J} \, d^3r &= \iiint_V -\frac{\partial \rho}{\partial t} \, d^3r \\ \therefore \vec{\nabla} \cdot \vec{J} &= -\frac{\partial \rho}{\partial t}\end{aligned}$$

1.2 Charge Carriers

Current density is the product of the total charge and the net drift velocity of the charge carriers.

$$\vec{J} = nq\overrightarrow{v_{\text{drift}}}$$

where n is the number of charge carriers and q is the charge on each of them.

$$\overrightarrow{v_{\text{drift}}} = \frac{1}{n} \sum \vec{v}_i$$

where \vec{v}_i is the velocity of the i^{th} charge carrier.

2 Ohm's Law

Law 5 (Ohm's Law). *The voltage across two points on a conductor is directly proportional to the current through the conductor. The constant of proportionality is called the resistance of the conductor.*

$$\frac{V}{I} = R$$

3 Resistors

3.1 Resistivity

Consider a conductor of cross-sectional area A and length L connected to a potential difference of V . Let the current passing through it be I .

Therefore,

$$\begin{aligned}I &= JA \\ V &= EL\end{aligned}$$

Therefore,

$$R = \frac{V}{I} = \frac{EL}{JA}$$

As $E \propto J$, E can be written as ρJ . Therefore,

$$R = \frac{\rho JL}{JA} = \rho \frac{L}{A}$$

Definition 13 (Resistivity). If


$$R = \rho \frac{L}{A}$$

ρ is called the resistivity of the conductor.

$\sigma = \frac{1}{\rho}$ is called the conductivity of the conductor.

They are constant for a particular material.

3.2 Resistors in Series



Let V_1 and V_2 be the voltages across R_1 and R_2 respectively.


As the resistors are in series,

$$\begin{aligned} V &= V_1 + V_2 \\ &= IR_1 + IR_2 \\ &= I(R_1 + R_2) \\ &= IR_{\text{equivalent}} \end{aligned}$$

Therefore,

$$R_{\text{equivalent}} = R_1 + R_2$$

3.3 Resistors in Parallel

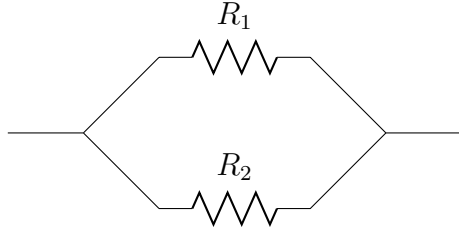

Let I_1 and I_2 be the currents through R_1 and R_2 respectively.
As the resistors are in parallel,

$$\begin{aligned} I &= I_1 + I_2 \\ &= \frac{V}{R_1} + \frac{V}{R_2} \\ &= V \left(\frac{1}{R_1} + \frac{1}{R_2} \right) \\ &= \frac{V}{R_{\text{equivalent}}} \end{aligned}$$

Therefore,

$$\frac{1}{R_{\text{equivalent}}} = \frac{1}{R_1} + \frac{1}{R_2}$$

4 Power and Energy


Consider a resistor of resistance R connected to a source of voltage V .
The energy needed to transfer a charge dq across V is

$$dU = V dq$$

Therefore the power dissipated across the resistor is

$$\begin{aligned} P &= \frac{dU}{dt} \\ &= V \frac{dq}{dt} \\ &= VI \\ &= I^2 R \end{aligned}$$

5 RC Series Circuit

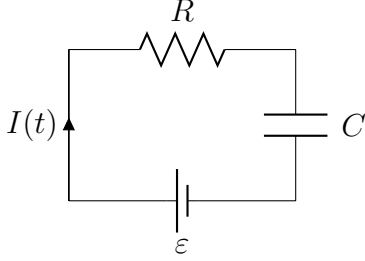

5.1 Charge on the Capacitor

$$\begin{aligned}
 \oint \vec{E} \cdot d\vec{l} &= 0 \\
 \therefore -\varepsilon + IR + \frac{Q}{C} &= 0 \\
 \therefore IR + \frac{Q}{C} &= \varepsilon \\
 \therefore I + \frac{Q}{RC} &= \frac{\varepsilon}{R} \\
 \therefore \frac{dq}{dt} + \frac{1}{RC}Q &= \frac{\varepsilon}{R} \\
 \therefore Q &= \frac{1}{e^{\int \frac{1}{RC} dt}} \int e^{\int \frac{1}{RC} dt} \frac{\varepsilon}{R} dt \\
 &= \frac{1}{e^{\frac{t}{RC}}} \varepsilon C e^{\frac{t}{RC}} + D
 \end{aligned}$$

As $Q(t = 0) = 0$, $D = -\varepsilon C$.

Therefore,

$$Q = \varepsilon C \left(1 - e^{-\frac{t}{RC}} \right)$$

Definition 14 (Time constant of RC circuit). $\tau = RC$ is called the time constant of a circuit with a resistor of resistance R and a capacitor of capacitance C connected in series.

5.2 Current in the Circuit

$$\begin{aligned}
 I &= \frac{dQ}{dt} \\
 &= \frac{\varepsilon}{R} e^{-\frac{t}{RC}}
 \end{aligned}$$

5.3 Power and Energy

The power supplied by the battery is

$$\begin{aligned} P_\varepsilon &= \varepsilon I \\ &= \frac{\varepsilon^2}{R} e^{-\frac{t}{RC}} \end{aligned}$$

The power dissipated at the resistor is

$$\begin{aligned} P_R &= I^2 R \\ &= \frac{\varepsilon^2}{R} e^{-\frac{2t}{RC}} \end{aligned}$$

The energy stored in the capacitor is

$$\begin{aligned} U_C &= \frac{Q^2}{2C} \\ &= \frac{\varepsilon^2 C}{2} \left(1 - e^{-\frac{t}{RC}}\right)^2 \end{aligned}$$

Therefore the power in the capacitor is

$$\begin{aligned} P_C &= \frac{dU_C}{dt} \\ &= \varepsilon^2 C \left(1 - e^{-\frac{t}{RC}}\right) \frac{e^{-\frac{t}{RC}}}{RC} \\ &= \frac{\varepsilon^2}{R} e^{-\frac{2t}{RC}} \end{aligned}$$

Therefore,

$$P_\varepsilon = P_R + P_C$$

Therefore, the power is conserved.

Exercise 17.

A thick conducting, cylindrical shell with inner radius a , outer radius b , and height h is charged with conductivity $\sigma(r) = \alpha r^2$. Assuming $h \ll a$,

1. Find the net resistance if the flat faces are connected to terminals of a battery.
2. Find the net resistance if the inner and outer surfaces are connected to terminals of a battery.

Solution 17.

1. Consider an elemental resistor, i.e. a thin cylindrical shell of radius $a < r < b$ and thickness dr .

Therefore,

$$\begin{aligned} dR &= \frac{1}{\sigma} \frac{L}{A} \\ &= \frac{1}{\alpha r^2} \frac{h}{2\pi r dr} \\ &= \frac{h}{2\pi \alpha r^3 dr} \end{aligned}$$

As the elemental resistors are connected in parallel,

$$\begin{aligned} \frac{1}{R} &= \int \frac{1}{dR} \\ &= \int_a^b \frac{2\pi \alpha r^3 dr}{h} \\ &= \frac{\pi \alpha}{2h} (b^4 - a^4) \\ \therefore R &= \frac{2h}{\pi \alpha (b^4 - a^4)} \end{aligned}$$

Alternatively,

$$\begin{aligned} J &= \sigma E \\ &= \sigma \frac{V}{h} \\ &= \alpha r^2 \frac{V}{h} \end{aligned}$$

$$\begin{aligned} I &= \iint \vec{J} \cdot d\vec{A} \\ &= \int_a^b \alpha r^2 \frac{V}{h} \cdot 2\pi r dr \\ &= \frac{\pi \alpha}{2h} (b^4 - a^4) V \end{aligned}$$

Therefore,

$$\begin{aligned} R &= \frac{V}{I} \\ &= \frac{2h}{\pi\alpha(b^4 - a^4)} \end{aligned}$$

The charge density in the body is

$$\begin{aligned} \varrho &= \varepsilon_0 \vec{\nabla} \cdot \vec{E} \\ &= 0 \end{aligned}$$

2. Consider an elemental resistor, i.e. a thin cylindrical shell of radius $a < r < b$ and thickness dr .

Therefore,

$$\begin{aligned} dR &= \frac{1}{\sigma} \frac{L}{A} \\ &= \frac{1}{\alpha r^2} \frac{dr}{2\pi r h} \\ &= \frac{dr}{2\pi\alpha r^3 h} \end{aligned}$$

As the elemental resistors are connected in series,

$$\begin{aligned} R &= \int dR \\ &= \int_a^b \frac{dr}{2\pi\alpha r^3 h} \\ &= \frac{1}{2\pi\alpha h} \left(-\frac{1}{2b^2} + \frac{1}{2a^2} \right) \\ &= \frac{1}{4\pi\alpha h} \left(\frac{1}{a^2} - \frac{1}{b^2} \right) \end{aligned}$$

Alternatively,

$$\begin{aligned} J &= \sigma E \\ \therefore \frac{I}{2\pi r h} &= \alpha r^2 E \\ \therefore E &= \frac{I}{2\pi\alpha r^3 h} \end{aligned}$$

Therefore,

$$\begin{aligned} V &= \int_a^b E \, dr \\ &= \int_a^b \frac{I \, dr}{2\pi\alpha r^3 h} \left(\frac{1}{a^2} - \frac{1}{b^2} \right) \end{aligned}$$

Therefore,

$$\begin{aligned} R &= \frac{V}{I} \\ &= \frac{1}{4\pi\alpha h} \left(\frac{1}{a^2} - \frac{1}{b^2} \right) \end{aligned}$$

The charge density in the body is

$$\begin{aligned} \varrho &= \varepsilon_0 \vec{\nabla} \cdot \vec{E} \\ &= \varepsilon_0 \frac{1}{r} \frac{d}{dr} (r E_r) \\ &= \varepsilon_0 \frac{1}{r} \frac{d}{dr} \left(\frac{I}{2\pi\alpha r^3 h} \right) \\ &= -\frac{\varepsilon_0 I}{\pi\alpha r^4 h} \end{aligned}$$

Therefore, the charge in the body is not zero.

However, it is constant in time. Therefore, in the steady state, it does not violate Kirchoff's Current Law.

Consider a cuboid Gaussian surface which contains part of the elemental ring in it.

As σ is varying, the electric field decreases as r increases.

Therefore by Gauss' Law, as the electric field entering the Gaussian surface is more than the electric field exiting the Gaussian surface. Hence, there must be a negative charge inside the Gaussian surface.

Part III

Magnetism

1 Magnetic Force

Law 6.

$$d\vec{F} = I d\vec{l} \times \vec{B}$$

Consider a stream of charged particles moving with velocity \vec{v} . Therefore, $d\vec{l} = v dt$.
Therefore,

$$\begin{aligned} d\vec{F} &= I d\vec{l} \times \vec{B} \\ &= \frac{dq}{dt} (\vec{v} dt) \times \vec{B} \\ &= dq \vec{v} \times \vec{B} \end{aligned}$$

2 Lorentz Force


Definition 15 (Lorentz force). The net force due to the electric field and due to the magnetic field is acting on a charged particle is called the Lorentz force.

$$\vec{F} = q\vec{E} + q\vec{v} \times \vec{B}$$

This force is dependent on the velocity of the charge. Therefore, the force will change depending on the frame of reference. Therefore it apparently violates the basic assumption that interactions between bodies are the same irrespective of the frame of reference.

Exercise 18.


A charged particle of charge q and mass m enters a region with uniform magnetic field as shown.

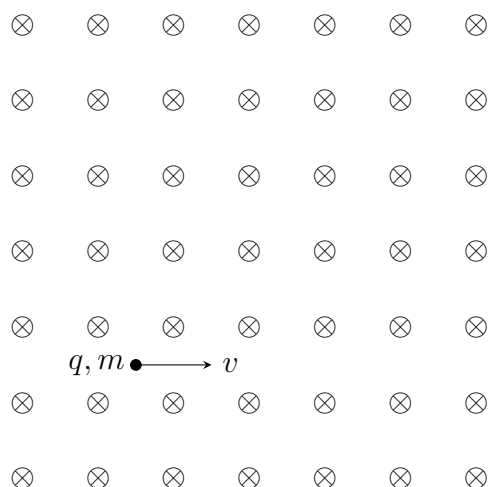

How will the particle move?

Solution 18.

The force is perpendicular to \vec{v} and \vec{B} .

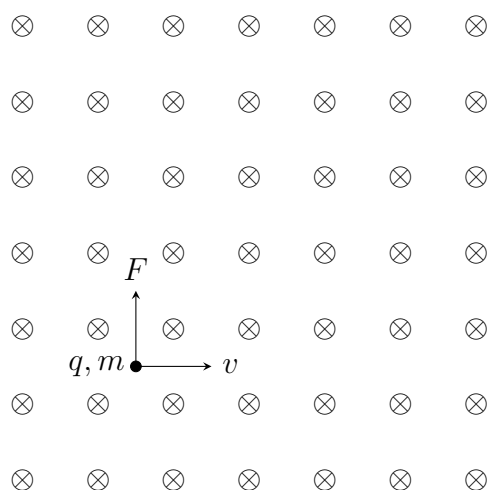


Therefore, as the force is always perpendicular to the velocity, it will change the direction of the velocity and not its magnitude. Therefore, the particle will move in a circle.

$$\begin{aligned}
 F &= qvB \\
 &= \frac{mv^2}{R} \\
 \therefore R &= \frac{mv}{qB}
 \end{aligned}$$

2.1 Cyclotron

A cyclotron is a setup used to accelerate charged particles. It is constructed with regions of magnetic field \vec{B} and regions of electric field \vec{E} as shown.

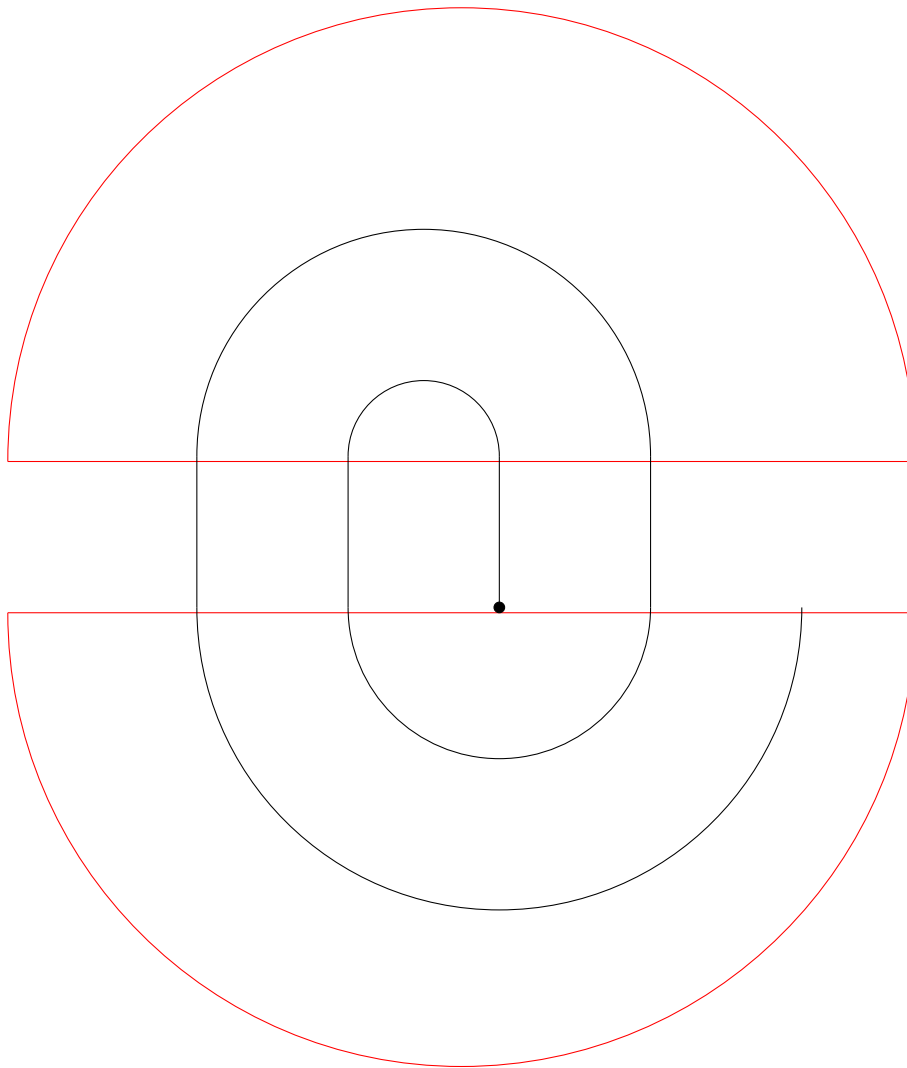

The semicircular areas have magnetic field \vec{B} directed inwards and the region between the semicircular areas have \vec{E} directed upwards. The electric field changes directions such that the frequency of the field is half the frequency of the rotation of the charged particle.

The particle with mass m and charge q starts as shown and is accelerated under the electric field till it enters the semicircular area.

Let the velocity of the particle when it enters the semicircular area be v_0 . It goes in a semicircle of radius $\frac{mv_0}{qB}$ and again enters the region with \vec{E} .

This process is continued till the particle is ejected.

3 Thompson's Experiment

Electrons from a cathode ray tube are accelerated under \vec{E} in the first region. When they enter the region with the magnetic field, they move in a circle.

$$\begin{aligned} eE &= evB \\ \therefore v &= \frac{E}{B} \\ \therefore R &= \frac{mv}{eB} \\ &= \frac{m \frac{E}{B}}{qB} \\ &= \frac{mE}{eB^2} \\ \therefore \frac{e}{m} &= \frac{E}{RB^2} \end{aligned}$$

Therefore, $\frac{e}{m}$ can be physically calculated.



4 Biot-Savart Law

Law 7 (Biot-Savart Law).

$$\begin{aligned} d\vec{B} &= \frac{\mu_0}{4\pi} \frac{I d\vec{l} \times \hat{r}}{r^2} \\ \therefore B &= \frac{\mu_0}{4\pi} \frac{q \vec{v} \times \hat{r}}{r^2} \end{aligned}$$

Exercise 19.

Find the magnetic field due on the axis of a ring of radius R carrying current I .

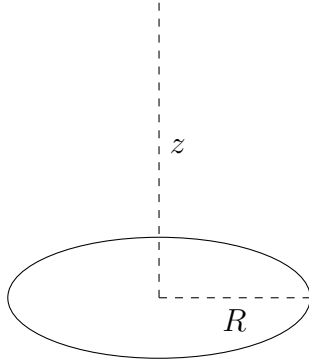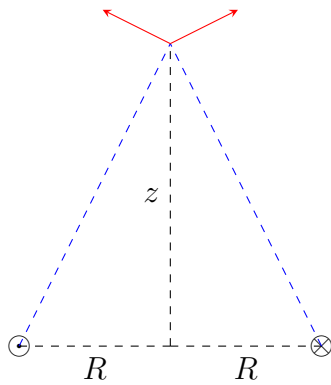**Solution 19.**

Due to symmetry of the ring, the components of the differential fields in the z direction are added up and all others are cancelled out.

Therefore,

$$\begin{aligned}
 \vec{B} &= \hat{z} \int dB \cos(90 - \theta) \\
 &= \hat{z} \int_0^{2\pi R} \frac{\mu_0}{4\pi} \frac{I dl}{z^2 + R^2} \frac{R}{\sqrt{R^2 + z^2}} \\
 &= \frac{\mu_0}{4\pi} \frac{IR^2}{(z^2 + R^2)^{\frac{3}{2}}} \hat{z}
 \end{aligned}$$

Exercise 20.

Find the magnetic field at a distance r from an infinite wire carrying current I .

Solution 20.

Consider an elemental current carrier of length dz at a distance z from the origin.

Therefore,


$$\begin{aligned}
 d\vec{B} &= \frac{\mu_0}{4\pi} \frac{I \vec{l} \times \hat{r}}{r^2} \\
 &= \frac{\mu_0}{4\pi} \frac{I dz \sin \theta}{r^2 + z^2} \hat{\varphi} \\
 &= \frac{\mu_0}{4\pi} \frac{I dz r}{(r^2 + z^2)^{\frac{3}{2}}} \hat{\varphi} \\
 &= \frac{I \mu_0 r}{4\pi} \frac{dz}{(r^2 + z^2)^{\frac{3}{2}}} \hat{\varphi} \\
 \therefore \vec{B} &= \hat{\varphi} \frac{I \mu_0 r}{4\pi} \int_{-\infty}^{\infty} \frac{dz}{(r^2 + z^2)^{\frac{3}{2}}} \\
 &= \frac{\mu_0 I}{2\pi r} \hat{\varphi}
 \end{aligned}$$

Definition 16 (Magnetic dipole moment). The magnetic dipole moment of a loop of area A carrying current I is defined as

$$\vec{m} = \vec{\mu} = I \vec{A}$$

Exercise 21.

A rigid, closed, square loop, carrying current I is placed in a region of external magnetic field \vec{B} as shown.

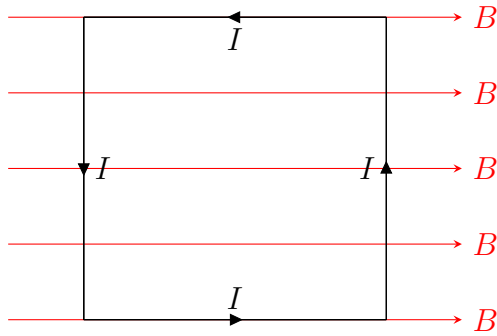

Describe the motion of the loop.

Solution 21.

The force on the right side of the square loop is directed inwards, and the force on the left side is directed outwards. These forces are equal in magnitude.

$$F = IaB$$

The forces on the upper and lower sides of the loop are zero, as the directions of the magnetic field and $\vec{I} d\vec{l}$ are the same.

Therefore, as the forces on the left and right sides are opposite in direction, there is no net force on the loop, but there is a net torque.

Hence, the loop will rotate around an axis as shown.

After the loop rotates, the upper and lower sides will have a force acting on them. However, due to the directions of the forces, it will have no effect on the motion of the loop. The forces only work towards deforming the loop.

Therefore, the net torque on the loop is

$$\begin{aligned}\vec{\tau} &= 2 \left(\frac{a}{2} \cdot IaB \cdot \sin \theta \right) \hat{z} \\ &= Ia^2 B \sin \theta \hat{z} \\ &= IAB \sin \theta \hat{z} \\ &= I \vec{A} \times \vec{B} \\ &= \vec{\mu} \times \vec{B}\end{aligned}$$

Exercise 22.

Find the force between two wires of length l , carrying currents I_1 and I_2 , respectively, separated by a distance r , where $l \gg r$.

Solution 22.

$$\begin{aligned}F &= I_2 l B_1 \\ &= I_2 l \frac{\mu_0 I_1}{2\pi r} \\ &= \frac{\mu_0 I_1 I_2 l}{2\pi r}\end{aligned}$$

5 Ampere's Law

Law 8 (Ampere's Law). *Let C be a virtual closed loop.*

$$\oint_C \vec{B} \cdot d\vec{l} = \mu_0 I_{\text{enclosed}}$$

Exercise 23.

A cylindrical wire of radius R is carrying current with current density $\vec{j} = j\hat{z}$. Find the magnetic field at a distance $r > R$ from the centre of the wire.

Solution 23.

$$\vec{B} = B_r \hat{r} + B_\varphi \hat{\varphi} + B_z \hat{z}$$

Due to the symmetry of the cylinder, B is independent of φ .

As the wire is infinite, B is independent of z .

By the Biot-Savart Law, B should be in the $\hat{\varphi}$ direction only. Therefore,

$$\vec{B}(r) = B_\varphi(r) \hat{\varphi}$$

Consider a circular virtual Ampere loop with radius r .

Therefore, by Ampere's Law,

$$\begin{aligned} \oint \vec{B} \cdot d\vec{l} &= \mu_0 I \\ \therefore B \cdot 2\pi r &= \mu_0 I \\ \therefore B &= \frac{\mu_0 I}{2\pi r} \\ \therefore \vec{B} &= \frac{\mu_0 I}{2\pi r} \hat{\varphi} \end{aligned}$$

If $r > R$,

$$\begin{aligned} \vec{B} &= \frac{\mu_0 j \pi R^2}{2\pi r} \hat{\varphi} \\ &= \frac{\mu_0 j R^2}{2r} \hat{\varphi} \end{aligned}$$

If $r < R$,

$$\begin{aligned}\vec{B} &= \frac{\mu_0 j \pi r^2}{2\pi r} \hat{\phi} \\ &= \frac{\mu_0 j r}{2} \hat{\phi}\end{aligned}$$

Therefore,


$$\vec{B} = \begin{cases} \frac{\mu_0 j r}{2} \hat{\phi} & ; \quad r < R \\ \frac{\mu_0 j R^2}{2r} \hat{\phi} & ; \quad r > R \end{cases}$$

Exercise 24.

An infinite plate in the x - y plane is carrying current in the positive x direction. The current density is $k = \frac{I}{l}$.

Solution 24.

Consider a square virtual Ampere loop, directed anti-clockwise, as shown.

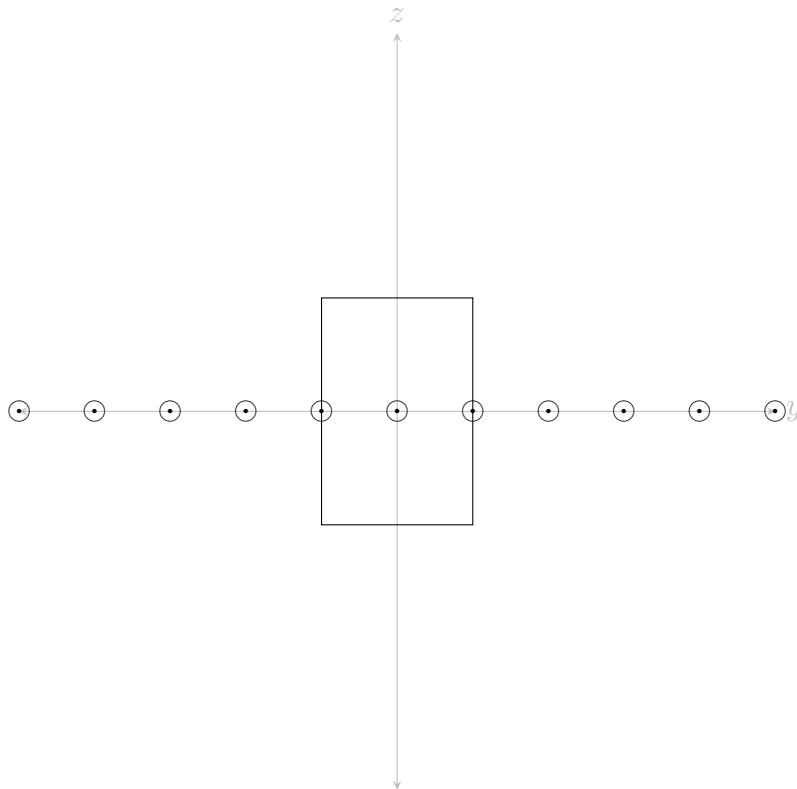

Therefore by Ampere's Law,

$$\begin{aligned}\oint \vec{B} \cdot d\vec{l} &= \mu_0 I_{\text{enclosed}} \\ \therefore 2|B|l &= \mu_0 kl \\ \therefore |B| &= \frac{\mu_0 k}{2}\end{aligned}$$

Therefore,

$$\vec{B} = \begin{cases} -\frac{\mu_0 k}{2} \hat{y} & ; \quad z > 0 \\ \frac{\mu_0 k}{2} \hat{y} & ; \quad z < 0 \end{cases}$$

6 Differential Form of Ampere's Law

Law 9 (Differential Form of Ampere's Law).


$$\vec{\nabla} \times \vec{B} = \mu_0 \vec{j}$$

Proof. Consider a closed virtual loop C with surface area S .


Therefore, by Ampere's Law,

$$\oint_C \vec{B} \cdot d\vec{l} = \mu_0 I_{\text{enclosed}}$$

The loop can be considered to be made up of two virtual loops as shown.



Similarly, let the area enclosed by the loop be divided into small virtual loops C_i of area a_i .

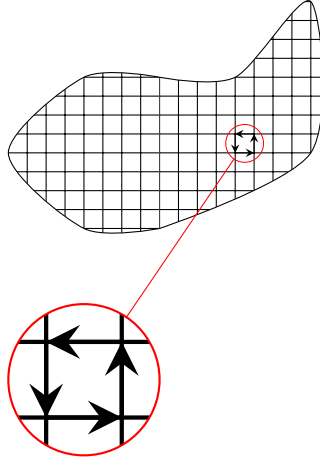

Therefore,

$$\oint_C \vec{B} \cdot d\vec{l} = \sum_i \oint_{C_i} \vec{B} \cdot d\vec{l}$$

The curl is defined as


$$(\text{curl } B)\hat{n} = \lim_{a_i \rightarrow 0} \frac{\oint_{C_i} \vec{B} \cdot d\vec{l}}{a_i}$$

where \hat{n} is perpendicular to the area a_i .

Therefore,

$$\begin{aligned} \oint_C \vec{B} \cdot d\vec{l} &= \lim_{\max a_i \rightarrow 0} \sum_i \oint_{C_i} \vec{B} \cdot d\vec{l} \\ &= \lim_{\max a_i \rightarrow 0} \sum_i (\text{curl } B)\hat{n} a_i \\ &= \lim_{\max a_i \rightarrow 0} \sum_i (\text{curl } B)\vec{a}_i \\ &= \iint_S \text{curl } B \cdot d\vec{a} \\ \therefore \oint_C \vec{B} \cdot d\vec{l} &= \iint_S \text{curl } B \cdot d\vec{a} \end{aligned}$$

Consider a loop in the x - y plane as shown.

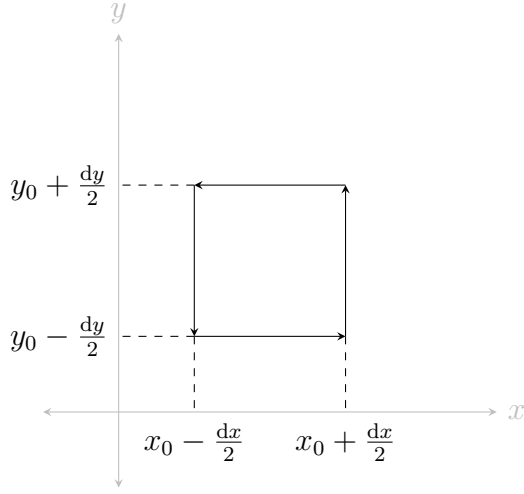

$$\begin{aligned}
(\text{curl } B)\hat{z} &= \frac{\oint \vec{B} \cdot d\vec{l}}{dx dy} \\
&= \frac{B_x\left(x_0, y_0 - \frac{dy}{2}, z_0\right) dx - B_x\left(x_0, y_0 + \frac{dy}{2}, z_0\right) dx}{dx dy} \\
&\quad + \frac{B_y\left(x_0 - \frac{dx}{2}, y_0, z_0\right) dy - B_y\left(x_0 + \frac{dx}{2}, y_0, z_0\right) dy}{dx dy} \\
&= \frac{\frac{B_x\left(x_0, y_0 - \frac{dy}{2}, z_0\right) dx dy - B_x\left(x_0, y_0 + \frac{dy}{2}, z_0\right) dx dy}{dy}}{dx dy} \\
&\quad + \frac{\frac{B_y\left(x_0 - \frac{dx}{2}, y_0, z_0\right) dx dy - B_y\left(x_0 + \frac{dx}{2}, y_0, z_0\right) dx dy}{dx}}{dx dy} \\
&= \frac{-\frac{\partial B_x}{\partial y}\Big|_{\left(x_0, y_0 - \frac{dy}{2}, x_0\right)} dx dy}{dx dy} + \frac{\frac{\partial B_y}{\partial x}\Big|_{\left(x_0 - \frac{dx}{2}, y_0, x_0\right)} dx dy}{dx dy} \\
&= \left(\frac{\partial B_y}{\partial x} - \frac{\partial B_x}{\partial y}\right)\Big|_{(x_0, y_0, z_0)}
\end{aligned}$$

Similarly for loops in the y - z and z - x planes.
Therefore,

$$\begin{aligned}
\text{curl } B &= \begin{vmatrix} \hat{x} & \hat{y} & \hat{z} \\ \frac{\partial}{\partial x} & \frac{\partial}{\partial y} & \frac{\partial}{\partial z} \\ B_x & B_y & B_z \end{vmatrix} \\
&= \vec{\nabla} \times \vec{B}
\end{aligned}$$

Therefore,


$$\vec{\nabla} \times \vec{B} = \mu_0 \vec{j}$$

□

7 Faraday's Law

Exercise 25.

A rod of length l is moving with velocity v in a region of uniform magnetic field B as shown.

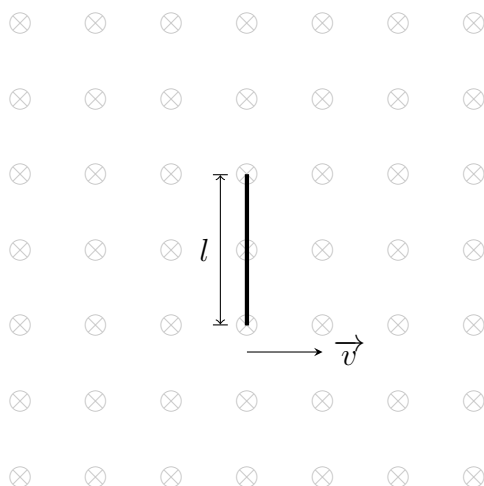

Find the potential difference V generated between its ends.

Solution 25.

As the rod is moving under a magnetic field, there will be a force acting on every charged particle in the rod. The force on positively charged particles is upwards and the force on negatively charged particles is downwards.

Therefore, there will be a charge distribution created inside the rod. Therefore, there will be an electric field between the ends of the rod. Hence, there will also be a potential difference generated between its ends.

Consider a charged particle of charge q in the rod.

The force required for it to move to the end of the rod is equal to the force acting on it due to its movement under the magnetic field.


Therefore,

$$\begin{aligned} qE &= qvB \\ \therefore El &= Bvl \\ \therefore V &= Bvl \end{aligned}$$

Definition 17 (Electromotive Force).

$$\varepsilon = \oint \left(\vec{E} + \vec{v} \times \vec{B} \right) \cdot d\vec{l}$$

Consider a rectangular loop of height L moving with velocity v as shown.

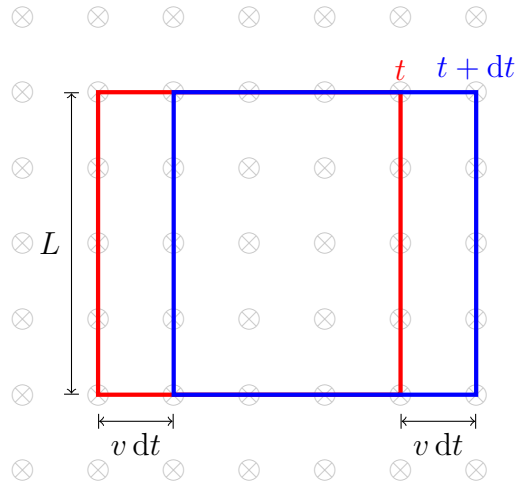

$$\begin{aligned} \varepsilon &= \oint \left(\vec{E} + \vec{v} \times \vec{B} \right) \cdot d\vec{l} \\ &= \oint \vec{E} \cdot d\vec{l} + \oint \left(\vec{v} \times \vec{B} \right) \cdot d\vec{l} \\ &= 0 + BLv \end{aligned}$$

$$\begin{aligned} d\Phi_B &= \Phi_B(t + dt) - \Phi_B(t) \\ &= (\text{flux due to common area} + B_2Lv dt) \\ &\quad - (\text{flux due to common area} + B_1Lv dt) \\ &= (B_2Lv - B_1Lv) dt \end{aligned}$$

Therefore,

$$B_2Lv - B_1Lv = \frac{d\Phi_B}{dt}$$

$$\therefore \varepsilon = - \frac{d\Phi_B}{dt}$$

In general,

Law 10 (Faraday's Law). *For a loop of area S ,*

$$\oint_{\partial S} \left(\vec{E} + \vec{v} \times \vec{B} \right) \cdot d\vec{l} = - \frac{d}{dt} \iint_S \vec{B} \cdot d\vec{a}$$

If the loop is not moving,

$$\oint_{\partial S} \vec{E} \cdot d\vec{l} = - \frac{d}{dt} \iint_S \vec{B} \cdot d\vec{a}$$

By Stoke's Theorem,

$$\iint_S \left(\vec{\nabla} \times \vec{E} \right) \cdot d\vec{a} = \iint_S - \frac{\partial \vec{B}}{\partial t} \cdot d\vec{a}$$

$$\therefore \vec{\nabla} \times \vec{E} = - \frac{\partial \vec{B}}{\partial t}$$

Law 11 (Lenz's Law). *The direction of an induced current is in a direction such that it opposes the change in the magnetic flux responsible for its creation.*


Exercise 26.

A solenoid of infinite length has n turns per unit length. The current through it is

$$I = \alpha t$$

Find the induced electric field, at a point inside it.

Solution 26.

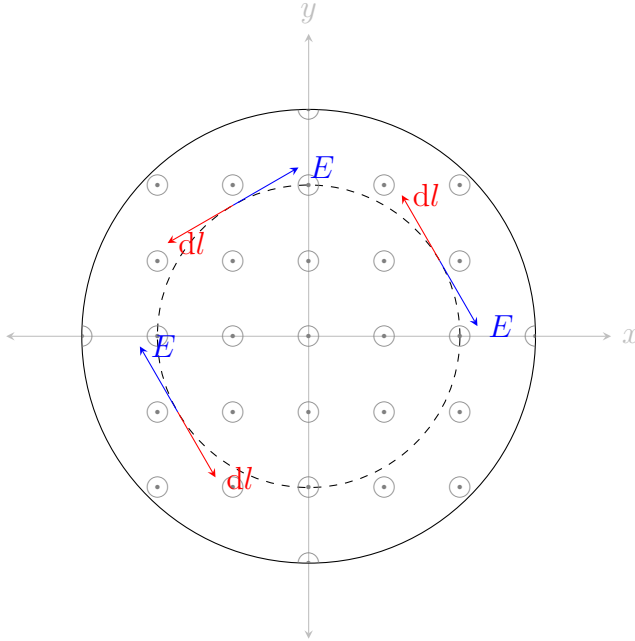

Consider a virtual loop of radius r , directed anti-clockwise.
Therefore, by Faraday's Law,

$$\begin{aligned}
 \oint \vec{E} \cdot d\vec{l} &= -\frac{d}{dt} (B \cdot \pi r^2) \\
 &= -\frac{d}{dt} (\mu_0 \alpha t n \cdot \pi r^2) \\
 &= -\mu_0 \alpha n \pi r^2 \\
 \therefore E \cdot 2\pi r &= -\mu_0 \alpha n \pi r^2 \\
 \therefore E &= -\frac{\mu_0 \alpha n r}{2}
 \end{aligned}$$

Therefore, as E is negative, it is opposite to the direction of the loop.
Therefore,

$$E = -\frac{\mu_0 \alpha n r}{2} \hat{\phi}$$

8 Inductors

Consider a solenoid with n turns per unit length.
Therefore,

$$B = \mu_0 I n$$

and

$$\varepsilon = - \frac{d\Phi_B}{dt}$$

Therefore,

$$\varepsilon \propto \frac{dI}{dt}$$

Definition 18 (Self inductance).

$$L = \frac{\varepsilon}{\frac{dI}{dt}}$$

is called self inductance.

Exercise 27.

Find the self inductance of a solenoid with length l , and N turns of radius R .

Solution 27.

Let the number of turns per unit length be

$$n = \frac{N}{l}$$

Let ε_1 be the voltage across each loop of the solenoid.
Therefore,

$$\varepsilon_1 = -\dot{\varphi}_B$$

Therefore, the voltage between the ends of the solenoid is,

$$\begin{aligned}
 \varepsilon_L &= N\varepsilon_1 \\
 \therefore L\dot{I} &= N\dot{\varphi}_B \\
 &= N \frac{d}{dt} (\mu_0 I n \pi R^2) \\
 &= N\mu_0 \dot{I} n \pi R^2 \\
 &= \mu_0 \frac{N^2}{l} \pi R^2 \dot{I} \\
 \therefore L &= \mu_0 \frac{N^2}{l} \pi R^2 \\
 &= \mu_0 n^2 l A
 \end{aligned}$$

8.1 Energy Stored in an Inductor

Consider an inductor of length l , cross-sectional area A , and inductance L .

$$\begin{aligned}
 P &= \varepsilon_L I \\
 \therefore \frac{dU_L}{dt} &= L\dot{I}I \\
 \therefore U_L &= \frac{1}{2}LI^2
 \end{aligned}$$

8.2 Energy Density


Consider an inductor of length l , cross-sectional area A , and inductance L .

$$\begin{aligned}
 U_L &= \frac{1}{2}LI^2 \\
 &= \frac{1}{2}\mu_0 n^2 l A \frac{B^2}{\mu_0^2 n^2} \\
 &= \frac{B^2}{2\mu_0} l A
 \end{aligned}$$

Therefore,

$$\begin{aligned}
 u_L &= \frac{U_L}{V} \\
 &= \frac{B^2}{2\mu_0} \\
 &= \frac{1}{2} \frac{1}{\mu_0} B^2
 \end{aligned}$$

9 LR Series Circuit



9.1 Current in the Inductor

$$\begin{aligned}
 \oint \vec{E} \cdot d\vec{l} &= 0 \\
 \therefore -\varepsilon + IR + L\dot{I} &= 0 \\
 \therefore \dot{I} + \frac{R}{L}I &= \frac{\varepsilon}{L} \\
 \therefore \frac{dI}{dt} + \frac{R}{L}I &= \frac{\varepsilon}{L} \\
 \therefore I &= \frac{1}{e^{\int \frac{R}{L} dt}} \int e^{\frac{R}{L} dt} \frac{\varepsilon}{L} dt \\
 &= \frac{\varepsilon}{R} \left(1 - e^{-\frac{R}{L}t} \right)
 \end{aligned}$$

Definition 19 (Time constant of LR circuit). $\tau = \frac{L}{R}$ is called the time constant of a circuit with a resistor of resistance R and a inductor of inductance L connected in series.

9.2 Mutual Inductance

Definition 20 (Mutual Inductance). Consider two loops, loop 1 and loop 2. Let there be a current I_1 in loop 1.

Therefore, a magnetic field B_1 will be induced.

Therefore, there will be a magnetic flux, $\Phi_{B_{21}}$, due to B_1 , in loop 2.

As a result, there will be a potential difference, ε_2 , induced in loop 2. Hence, there will be a current, I_2 , induced in loop 2.

The mutual inductance of the two loops is defined as

$$\varepsilon_2 = -M_{21}\dot{I}_1$$

$$M_{12} = M_{21} = M$$

Theorem 1. *Consider two loops, loop 1 and loop 2.
Then,*

$$M_{12} = M_{21} = M$$

Exercise 28.

Find the mutual inductance of two concentric rings of radii $r_1 \ll r_2$.

Solution 28.

Let there be a current I_2 in the ring of radius r_2 .

Therefore, the magnetic field at the centre, due to I_2 is,

$$\begin{aligned} B_2 &= \frac{\mu_0 I_2}{2r_2} \\ \therefore \Phi_{B12} &= \frac{\mu_0 I_2}{2r_2} \cdot \pi r_1^2 \\ \therefore \varepsilon_1 &= -\dot{\Phi}_{B12} \\ &= -\frac{\mu_0 \pi r_1^2}{2r_2} \dot{I}_2 \\ \therefore \frac{\varepsilon_i}{\dot{I}_2} &= \frac{\mu_0 \pi r_1^2}{2r_2} \\ \therefore M &= \frac{\mu_0 \pi r_1^2}{2r_2} \end{aligned}$$