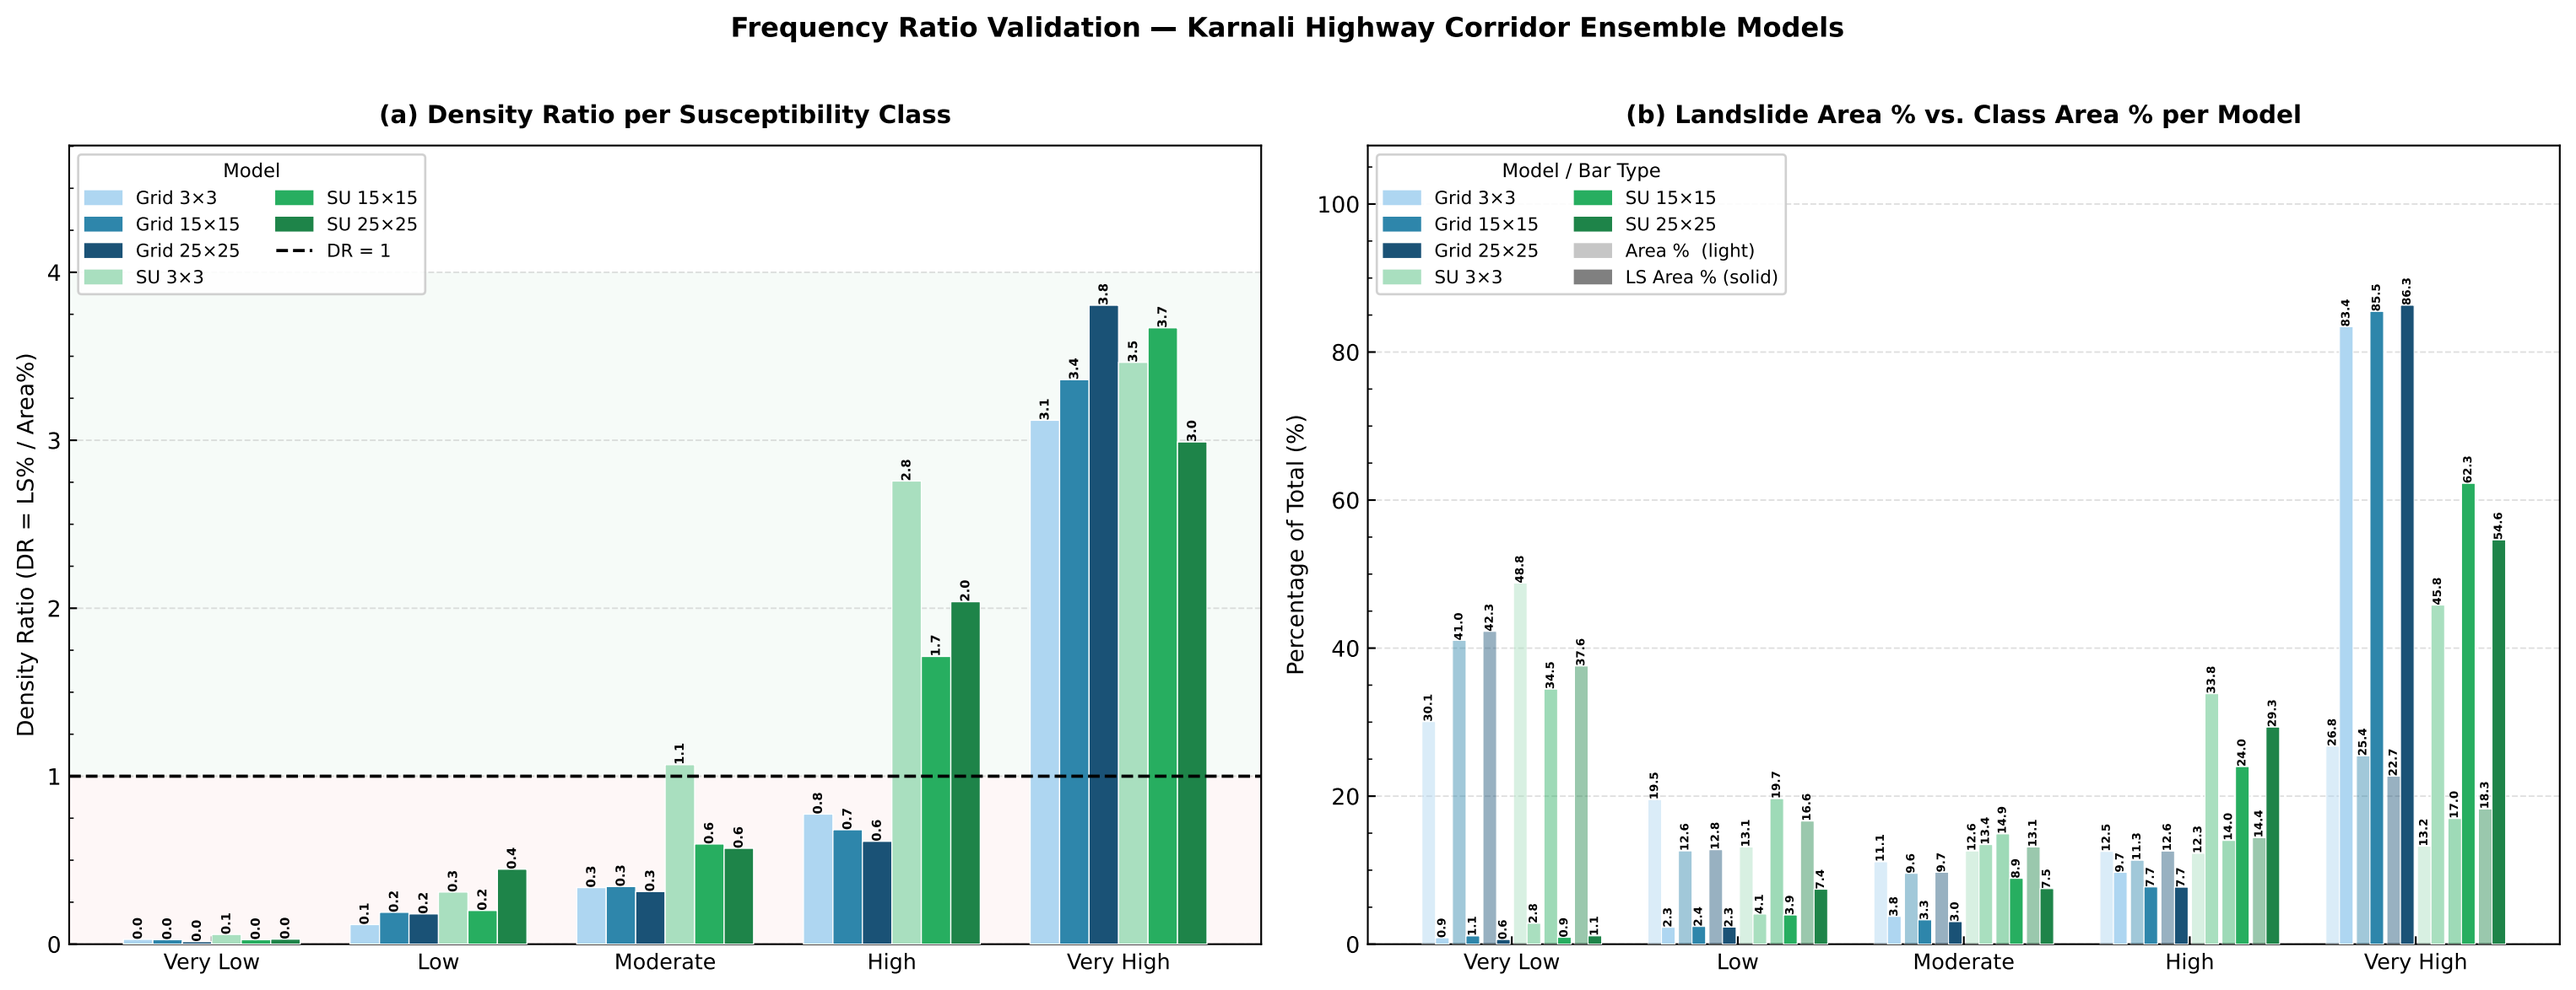
Frequency Ratio Validation — Karnali Highway Corridor Ensemble Models
(a) Density Ratio per Susceptibility Class
Density Ratio (DR = LS% / Area%)
Model
Grid 3×3
Grid 15×15
Grid 25×25
SU 3×3
SU 15×15
SU 25×25
DR = 1
Very Low
Low
Moderate
High
Very High
(b) Landslide Area % vs. Class Area % per Model
Percentage of Total (%)
Model / Bar Type
Area % (light)
LS Area % (solid)