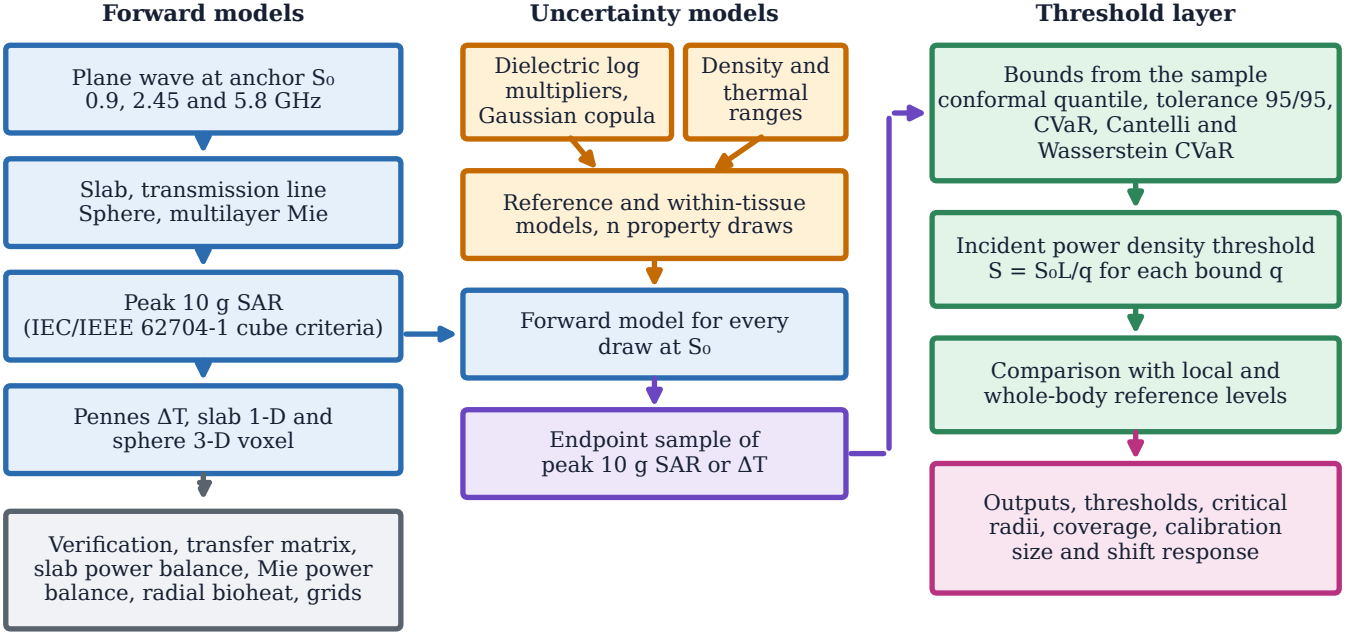
Forward models
Plane wave at anchor S0
0.9, 2.45 and 5.8 GHz
Slab, transmission line
Sphere, multilayer Mie
Peak 10 g SAR
(IEC/IEEE 62704-1 cube criteria)
Pennes ΔT, slab 1-D and
sphere 3-D voxel
Verification, transfer matrix,
slab power balance, Mie power
balance, radial bioheat, grids
Uncertainty models
Dielectric log
multipliers,
Gaussian copula
Density and
thermal
ranges
Reference and within-tissue
models, n property draws
Forward model for every
draw at S0
Endpoint sample of
peak 10 g SAR or ΔT
Threshold layer
Bounds from the sample
conformal quantile, tolerance 95/95,
CVaR, Cantelli and
Wasserstein CVaR
Incident power density threshold
S = S0L/q for each bound q
Comparison with local and
whole-body reference levels
Outputs, thresholds, critical
radii, coverage, calibration
size and shift response