


Cambridge University Engineering Dept.

Third year

Module 3F2: Systems and Control**LECTURE NOTES 3: OBSERVABILITY & OBSERVERS****Contents****Contents**

1	Sampled Data Control System	3
2	Solving Linear Equations	5
3	Observability	9
3.1	Effect of Initial Condition on Output	12
3.2	Change of State Coordinates when System is not Observable	14
4	Observers	17
4.1	Differentiating signals is a bad idea	17
4.2	Observer structure	18
4.3	Tracking disturbances, ignoring noise	23
4.4	Kalman Filter (for interest see 4F3 next year)	24
4.5	Application to sensor fusion	25
4.6	Application to sensor bias estimation	27

1 Sampled Data Control System

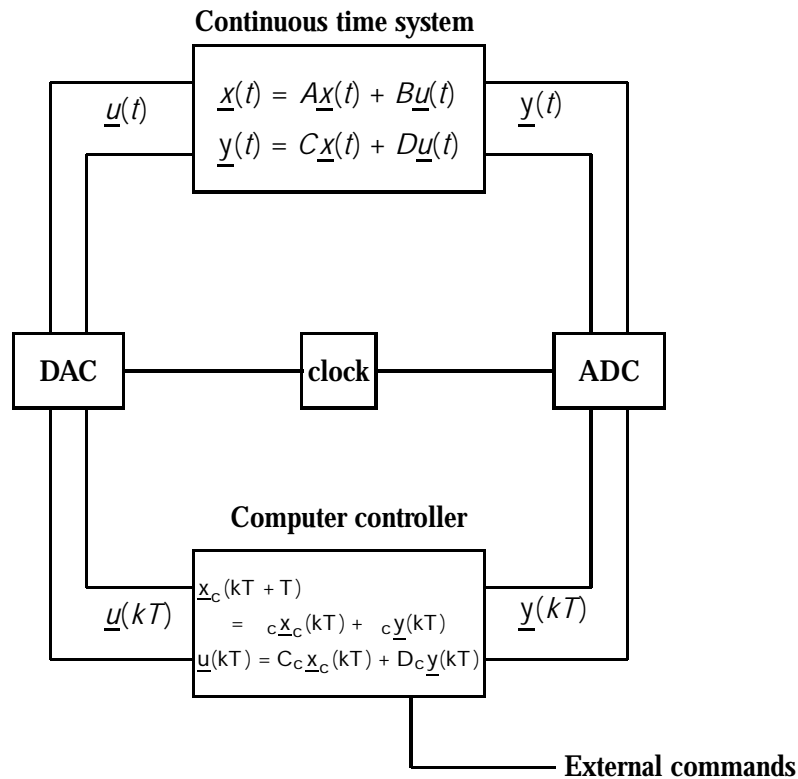

The sampled data system satisfies

$$\underline{x}(t) = A\underline{x}(t) + B\underline{u}(t), \quad \text{with } \underline{u}(t) = \underline{u}(kT), \quad \text{for } kT \leq t < (k+1)T.$$

Apply result from Handout 1, section 4.5 (Convolution integral):

$$\begin{aligned} \underline{x}((k+1)T) &= e^{AT} \underline{x}(kT) + \int_{kT}^{(k+1)T} e^{A((k+1)T - \tau)} B d \underline{u}(\tau) \\ &= \underline{x}(kT) + \underline{u}(kT) \end{aligned}$$

where

$$\begin{aligned} &= \int_0^T e^{A(T-\tau)} d \tau B = A^{-1} (e^{AT} - I) B, \quad \text{if } \det(A) \neq 0. \\ \underline{y}(kT) &= C\underline{x}(kT) + D\underline{u}(kT) \end{aligned}$$

This gives the standard state-space model in discrete time. Entirely analogous results can be obtained for the discrete time case as in the continuous time case:

• Solution of vector difference equations,

• Discrete-time convolution,

• z-transform for frequency response calculations etc,

• Notions of controllability and observability coming next.

2 Solving Linear Equations

For convenience we will repeat some results and definitions from linear algebra.

Definition 2.1 Let A be an $m \times n$ matrix then,

- (a) the set of all $\underline{x} \in \mathbb{R}^n$ such that $A\underline{x} = \underline{0}$ is called the **Null Space** of A ($\text{null}(A)$). This is sometimes referred to as the **Kernel** of A .
- (b) the set of all \underline{y} such that $\underline{y} = A\underline{x}$ for some \underline{x} is called the **Range Space** of A (or the range of A , $\text{range}(A)$); This is sometimes referred to as the **Column Space** or **Image** of A .
- (c) A is said to have full row rank if $\text{range}(A) = \mathbb{R}^m$ (i.e. $\underline{z}^T A \neq \underline{0}$ for all $\underline{z} \in \mathbb{R}^m$);
- (d) A is said to have full column rank if $\text{null}(A) = \{\underline{0}\}$ (i.e. $A\underline{x} = \underline{0}$ for all $\underline{x} = \underline{0}$.)

Theorem 2.2 For any matrix A the row rank and the column rank are equal, and denoted $\text{rank}(A)$.

Given an $m \times n$ matrix A and an $m \times 1$ vector \underline{b} , consider the equation:

$$A\underline{x} = \underline{b}$$

in the unknown \underline{x} in \mathbb{R}^n . Two natural questions are:

- (a) Does there exist a solution, \underline{x} ?
- (b) If so, is it unique?

Fact 2.3 For the case $m = n$:

- (a) If $\det(A) \neq 0$ then for any \underline{b} there exists a solution, \underline{x} , such that $A\underline{x} = \underline{b}$, and this solution is unique (Indeed it is given by $\underline{x} = A^{-1}\underline{b}$).
- (b) If $\det(A) = 0$ then there exists $\underline{x} \neq \underline{0}$ such that $A\underline{x} = \underline{0}$.

Fact 2.4 For any $m \times n$ matrix, M ,

$$M^T M \underline{x} = \underline{0} \quad M \underline{x} = \underline{0}.$$

Fact 2.5 For the case $m = n$,

(a) If $\det(AA^T) \neq 0$ then $\underline{x} = A^T (AA^T)^{-1} \underline{b}$, solves $A\underline{x} = \underline{b}$ for any \underline{b} .

(b) If $\det(AA^T) = 0$ then there exists a $\underline{b} \neq \underline{0}$ such that $\underline{b} \neq A\underline{x}$ (i.e. $\underline{b}^T A\underline{x} = \underline{0}$) for all \underline{x} .

For the case $m < n$,

(c) If $\det(A^T A) \neq 0$ then there may not be a solution to $A\underline{x} = \underline{b}$, but if there is then it is unique.

(d) If $\det(A^T A) = 0$ then there exists $\underline{x} \neq \underline{0}$ such that $A\underline{x} = \underline{0}$.

For hand calculations it is generally easiest to use the following observations:

(a) If you can find a set of n rows of A such that the determinant of the $n \times n$ submatrix given by these rows is nonzero, then A has full column rank.

(b) If you can find a nonzero vector, \underline{x} , such that $A\underline{x} = \underline{0}$ then clearly A does not have full column rank.

(c) If you can find a set of m columns of A such that the determinant of the $m \times m$ submatrix given by these columns is nonzero, then A has full row rank.

(d) If you can find a nonzero vector, \underline{z} , such that $\underline{z}^T A = \underline{0}$ then clearly A does not have full row rank.

3 Observability

A system:

$$\begin{aligned}\underline{\dot{x}} &= A\underline{x} + B\underline{u} \\ \underline{y} &= C\underline{x}\end{aligned}$$

is called **observable** if we can deduce the state, $\underline{x}(t)$, from measurements of $\underline{u}(\cdot)$ and $\underline{y}(\cdot)$ over some time interval.

Now consider differentiating $\underline{y}(t)$ to give

$$\begin{array}{rcll} \underline{y}(t) & C & \underline{0} & \\ \underline{\dot{y}}(t) & CA & CB\underline{u}(t) & \\ \underline{\ddot{y}}(t) & = CA^2 & \underline{x}(t) + CAB\underline{u}(t) + CB\underline{\dot{u}}(t) & \\ \vdots & \vdots & ? & \vdots \\ \underline{y}^{(n-1)}(t) & CA^{n-1} & CA^{n-2}B\underline{u} + \dots + CB\underline{u}^{(n-2)}(t) & \\ \text{known} & Q & \text{known} & \end{array}$$

We can solve the above equation uniquely for $\underline{x}(t)$ if and only if $\text{rank } Q = n$. Hence, defining the **observability matrix**

$$Q = \begin{bmatrix} C \\ CA \\ \vdots \\ CA^{n-1} \end{bmatrix}$$

we obtain the **Observability test**:

The system is observable if and only if $\text{rank } Q = n$

If a system is *not* observable, there will exist a vector $\underline{x}_0 \neq \underline{0}$ for which $Q\underline{x}_0 = \underline{0}$. This is called an **unobservable state**, for the following reason.

$$\begin{aligned} Q\underline{x}_0 &= \underline{0} & CA^k \underline{x}_0 &= \underline{0} \text{ for } k = 0, 1, \dots, n-1 \\ CA^n \underline{x}_0 &= C \underline{e}^{A^n} \underline{x}_0 = C \underline{e}^{A^n} \underline{x}_0 \text{ by Cayley-Hamilton Theorem} \\ &= \underline{0} \\ CA^k \underline{x}_0 &= \underline{0} \text{ for all } k \text{ by repeated use of Cayley-Hamilton theorem.} \\ Ce^{At} \underline{x}_0 &= \underline{0} \text{ for all } t \text{ by the power series expansion of } e^{At} \end{aligned}$$

Conversely, $Ce^{At} \underline{x}_0 = \underline{0}$ for all t implies $\frac{d^n}{dt^n} Ce^{At} \underline{x}_0 = CA^n e^{At} \underline{x}_0 = \underline{0}$ and so $Q\underline{x}_0 = \underline{0}$.

Hence $Ce^{At} \underline{x}_0 = \underline{0}$ for all t $\iff Q\underline{x}_0 = \underline{0}$.

Recall that

$$\underline{y}(t) = \underbrace{Ce^{At} \underline{x}(0)}_{\text{initial condition response}} + \underbrace{\int_0^t Ce^{A(t-\tau)} B \underline{u}(\tau) d\tau}_{\text{input response}}$$

and so if two initial states $\underline{x}_1, \underline{x}_2$ give the same outputs then $\underline{0} = \underline{y}_2 - \underline{y}_1 = Ce^{At}(\underline{x}_2 - \underline{x}_1)$. In this case, $\underline{x}_0 = \underline{x}_1 - \underline{x}_2$ is an unobservable state.

3.1 Effect of Initial Condition on Output

Now consider the difference between two initial condition responses:

$$\underline{y}_0(t) = Ce^{At} \underline{x}_0 \text{ and } \underline{y}(t) = Ce^{At} \underline{x}_0 + \underline{d} \text{ so } \underline{y}(t) - \underline{y}_0(t) = Ce^{At} \underline{d}$$

Can $\underline{y}(t) - \underline{y}_0(t)$ be small in spite of \underline{d} being large? Measure the size of $\underline{y}(t) - \underline{y}_0(t)$ over the time interval $0 < t < t_1$ by

$$\begin{aligned} \int_0^{t_1} \|\underline{y}(t) - \underline{y}_0(t)\|^2 dt &= \int_0^{t_1} (\underline{y}(t) - \underline{y}_0(t))^T (\underline{y}(t) - \underline{y}_0(t)) dt \\ &= \int_0^{t_1} \underline{d}^T e^{A^T t} C^T C e^{At} \underline{d} dt = \underline{d}^T W_0(t_1) \underline{d} \text{ where } W_0(t_1) = \int_0^{t_1} e^{A^T t} C^T C e^{At} dt \end{aligned}$$

Clearly this difference must be ≥ 0 so $W_0(t_1)$ is a positive semi-definite matrix. The system will be observable if $\underline{d}^T W_0(t_1) \underline{d} > 0$ for all $\underline{d} \neq \underline{0}$, i.e. if $W_0(t_1)$ is a positive definite matrix.

Also,

$$\begin{aligned} \underline{d} \text{ in Null Space of } W_0(t_1) &\iff W_0(t_1) \underline{d} = \underline{0} \iff \underline{d}^T W_0(t_1) \underline{d} = 0 \iff Ce^{At} \underline{d} = \underline{0} \text{ for all } t < t_1 \\ &\iff \underline{d} \text{ is an unobservable state.} \end{aligned}$$

$$\text{Null Space of } W_0(t_1) = \text{Null Space of } Q.$$

Example

$$\underline{x} = \begin{bmatrix} 1 \\ 0 \end{bmatrix} \quad \underline{y} = \begin{bmatrix} 1 & 1 \end{bmatrix} \underline{x} \quad Ce^{At} = \begin{bmatrix} e^{-t} & e^{-2t} \end{bmatrix}$$

$$W_o(t_1) = \begin{bmatrix} t_1 & e^{-2t_1} & e^{-3t_1} \\ 0 & e^{-3t_1} & e^{-4t_1} \end{bmatrix} \quad dt = \begin{bmatrix} \frac{1}{2} & 1 & e^{-2t_1} \\ \frac{1}{3} & 1 & e^{-3t_1} \end{bmatrix} \quad \text{as } t_1 \rightarrow 0 \quad \begin{bmatrix} \frac{1}{2} & \frac{1}{3} \\ \frac{1}{3} & \frac{1}{4} \end{bmatrix}$$

3.2 Change of State Coordinates when System is not Observable

If (A, C) is not observable then we can make a change of state coordinates to isolate the unobservable states as follows.

If the rank $Q = r < n$ then there exists a nonsingular $n \times n$ matrix T and a $pn \times r$ matrix \tilde{Q}_1 of rank r , such that (Recall QR factorization)

$$Q = \begin{bmatrix} \tilde{Q}_1 & 0 \end{bmatrix} T$$

Now change the state coordinates to $\tilde{x} = T\underline{x}$:

$$\tilde{\underline{x}} = \begin{bmatrix} \tilde{A} & \tilde{B} \end{bmatrix} \tilde{\underline{x}} + \begin{bmatrix} \tilde{C} \end{bmatrix} \tilde{\underline{x}} \quad \underline{y} = \begin{bmatrix} \tilde{C} \end{bmatrix} \tilde{\underline{x}}.$$

Theorem 3.1 In these coordinates if we partition the state, $\tilde{\underline{x}} = \begin{bmatrix} \tilde{x}_1 \\ \tilde{x}_2 \end{bmatrix}$ with \tilde{x}_1 of dimension r , and compatibly partition:

$$\tilde{A} = \begin{bmatrix} \tilde{A}_{11} & \tilde{A}_{12} \\ \tilde{A}_{21} & \tilde{A}_{22} \end{bmatrix} ; \quad \tilde{B} = \begin{bmatrix} \tilde{B}_1 \\ \tilde{B}_2 \end{bmatrix} ; \quad \tilde{C} = \begin{bmatrix} \tilde{C}_1 & \tilde{C}_2 \end{bmatrix}$$

then

$$\tilde{C}_2 = \mathbf{0}, \quad \tilde{A}_{12} = \mathbf{0}, \quad \text{and } (\tilde{A}_{11}, \tilde{C}_1) \text{ is observable}$$

Proof: Firstly $\tilde{C}\tilde{A}^k = C\mathcal{T}^{\mathbb{M}}T A^k \mathcal{T}^{\mathbb{M}} = C A^k \mathcal{T}^{\mathbb{M}}$ and so the observability matrix in the transformed coordinates is given by

$$\tilde{Q} = \begin{pmatrix} \tilde{C} \\ \tilde{C}\tilde{A} \\ \vdots \\ \tilde{C}\tilde{A}^{n_{\mathbb{M}}} \end{pmatrix} = \begin{pmatrix} C\mathcal{T}^{\mathbb{M}} \\ CA\mathcal{T}^{\mathbb{M}} \\ \vdots \\ CA^{n_{\mathbb{M}}}\mathcal{T}^{\mathbb{M}} \end{pmatrix} = Q\mathcal{T}^{\mathbb{M}} = \begin{pmatrix} \tilde{Q}_1 & \mathbf{0} \end{pmatrix}$$

Hence

$$\tilde{Q} \begin{pmatrix} \mathbf{0} \\ I_{n_{\mathbb{M}}} \end{pmatrix} = \begin{pmatrix} \tilde{Q}_1 & \mathbf{0} \end{pmatrix} \begin{pmatrix} \mathbf{0} \\ I_{n_{\mathbb{M}}} \end{pmatrix} = \mathbf{0}$$

From which it follows that

$$\tilde{C}\tilde{A}^k \begin{pmatrix} \mathbf{0} \\ I_{n_{\mathbb{M}}} \end{pmatrix} = \mathbf{0} \text{ for all } k.$$

In particular, $\tilde{C}_2 = \mathbf{0}$. Furthermore

$$\tilde{Q}\tilde{A} \begin{pmatrix} \mathbf{0} \\ I_{n_{\mathbb{M}}} \end{pmatrix} = \begin{pmatrix} \tilde{C}\tilde{A} \\ \tilde{C}\tilde{A}^2 \\ \vdots \\ \tilde{C}\tilde{A}^n \end{pmatrix} \begin{pmatrix} \mathbf{0} \\ I_{n_{\mathbb{M}}} \end{pmatrix} = \mathbf{0}$$

But

$$\tilde{Q}\tilde{A} \begin{pmatrix} \mathbf{0} \\ I_{n_{\mathbb{M}}} \end{pmatrix} = \begin{pmatrix} \tilde{Q}_1 & \mathbf{0} \end{pmatrix} \begin{pmatrix} \tilde{A}_{11} & \tilde{A}_{12} \\ \tilde{A}_{21} & \tilde{A}_{22} \end{pmatrix} \begin{pmatrix} \mathbf{0} \\ I_{n_{\mathbb{M}}} \end{pmatrix} = \tilde{Q}_1 \tilde{A}_{12}$$

which implies that $\tilde{A}_{12} = \mathbf{0}$ since \tilde{Q}_1 is full column rank.

Hence in these state coordinates we have,

$$\underline{\tilde{x}}_1 = \tilde{A}_{11}\underline{\tilde{x}}_1 + \tilde{B}_1\underline{u}, \quad \underline{y} = \tilde{C}_1\underline{\tilde{x}}_1$$

and the input/output response (i.e. the transfer function) depends only on $\underline{\tilde{x}}_1$ and the states $\underline{\tilde{x}}_2$ are all unobservable.

3.2.1 A subspace interpretation

As before, we start by factorising Q as $Q = \begin{bmatrix} \tilde{Q}_1 & 0 \\ 0 & T \end{bmatrix}$.

Now put $\mathcal{T}^{\mathcal{U}} = [X \ Y]$.

Y in \mathbb{R}^n is a basis for $\text{null}(Q)$, which we shall call \mathcal{U} , the unobservable subspace. (i.e. whenever $a = Yb$, $Qa = 0$)

and X complements Y

(i.e. $\text{range}[X \ Y] = \mathbb{R}^n$ and, whenever $a_1 = Yb_1$ and $a_2 = Xb_2$, then $a_1^\top a_2 = 0$.)

Note that $A\mathcal{U} \subset \mathcal{U}$ and $\mathcal{U} \subset \text{null}(C)$.

Since $A\mathcal{T}^{\mathcal{U}} = \mathcal{T}^{\mathcal{U}}\hat{A}$, we have

$$A[X \ Y] = [X \ Y] \begin{bmatrix} \hat{A}_{11} & \hat{A}_{12} \\ \hat{A}_{21} & \hat{A}_{22} \end{bmatrix}$$

or

$$AY = [X \ Y] \begin{bmatrix} \hat{A}_{12} \\ \hat{A}_{22} \end{bmatrix} = X\hat{A}_{12} + Y\hat{A}_{22}$$

and so $\hat{A}_{12} = 0$.

Also $C\mathcal{T}^{\mathcal{U}} = \hat{C}$, i.e.

$$C[X \ Y] = [\hat{C} \ 0]$$

4 Observers

4.1 Differentiating signals is a bad idea

Typically the state is not available for measurement,
but we can estimate $\underline{x}(t)$ from \underline{y} and \underline{u}

In the section on observability we saw how to exactly deduce $\underline{x}(t)$ from

$$y, \dot{y}, \dots, y^{(n-1)}, u, \dot{u}, \dots, u^{(n-1)}$$


but differentiating signals has bad noise amplification problems:

$$\begin{aligned} y(t) &= \sin t + \sin_n t & \text{S/N ratio} &= 1/ \\ y(t) &= \cos t + \frac{1}{n} \cos_n t & \text{S/N ratio} &= (1/n) \\ y(t) &= \frac{1}{n^2} \sin t + \frac{1}{n^2} \sin_n t & \text{S/N ratio} &= \frac{1}{n^2} \end{aligned}$$

4.2 Observer structure

Instead we will use a *state observer* (Luenberger Observer) which contains a dynamic model of the system and whose state, $\hat{\underline{x}}(t)$, approaches $\underline{x}(t)$ as $t \rightarrow \infty$.

$$\begin{aligned} \dot{\hat{\underline{x}}} &= A\hat{\underline{x}} + B\underline{u} + L(\underline{y} - \hat{\underline{y}}) \\ \hat{\underline{y}} &= C\hat{\underline{x}} \end{aligned}$$

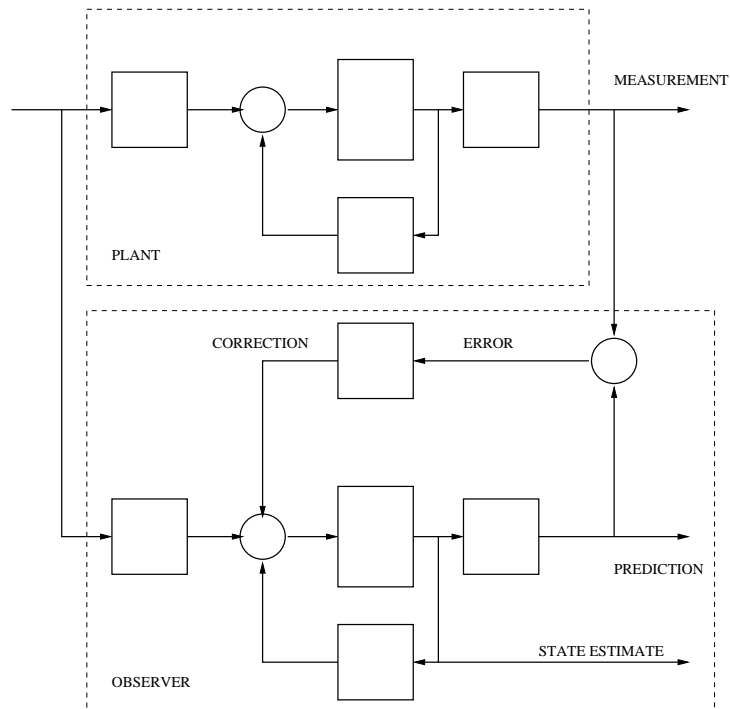

Consider the error $\underline{e}(t) = \underline{x}(t) - \hat{\underline{x}}(t)$

$$\begin{aligned}\underline{e} &= \underline{x} - \hat{\underline{x}} = (A\underline{x} + B\underline{u}) - (A\hat{\underline{x}} + B\underline{u} + L(y - \hat{y})) \\ &= A(\underline{x} - \hat{\underline{x}}) - LC(\underline{x} - \hat{\underline{x}}) = (A - LC)\underline{e}\end{aligned}$$

$$\underline{e} = (A - LC)\underline{e}$$

We want $e^{(A-LC)t} \rightarrow 0$ quickly as t increases.

This is achieved if the eigenvalues of $(A - LC)$ are large and negative, for example.

Can we assign the eigenvalues of $(A \parallel L C)$ by choice of L ?

Suppose (A, C) is **not** observable then in section 3.2 we found a change of coordinates, $\tilde{x} = T x$ such that,

$$\begin{bmatrix} \tilde{x}_1 \\ \tilde{x}_2 \end{bmatrix} = \begin{bmatrix} \tilde{A}_{11} & 0 \\ \tilde{A}_{21} & \tilde{A}_{22} \end{bmatrix} \begin{bmatrix} \tilde{x}_1 \\ \tilde{x}_2 \end{bmatrix} + \begin{bmatrix} \tilde{B}_1 \\ \tilde{B}_2 \end{bmatrix} \underline{u}, \quad \underline{y} = \begin{bmatrix} \tilde{C}_1 & 0 \end{bmatrix} \begin{bmatrix} \tilde{x}_1 \\ \tilde{x}_2 \end{bmatrix} + D \underline{u}$$

Hence

$$T(A \parallel L C)T^{-1} = \tilde{A} \parallel \tilde{L} \tilde{C} = \begin{bmatrix} \tilde{A}_{11} & 0 \\ \tilde{A}_{21} & \tilde{A}_{22} \end{bmatrix} \parallel \begin{bmatrix} \tilde{L}_1 \\ \tilde{L}_2 \end{bmatrix} \begin{bmatrix} \tilde{C}_1 & 0 \end{bmatrix} = \begin{bmatrix} (\tilde{A}_{11} \parallel \tilde{L}_1 \tilde{C}_1) & 0 \\ (\tilde{A}_{21} \parallel \tilde{L}_2 \tilde{C}_1) & \tilde{A}_{22} \end{bmatrix},$$

and the eigenvalues of the observer,

$$\lambda_i(A \parallel L C) = \lambda_i(\tilde{A} \parallel \tilde{L} \tilde{C}) = \lambda_i(\tilde{A}_{11} \parallel \tilde{L}_1 \tilde{C}_1) \quad \lambda_i(\tilde{A}_{22}),$$

and $\lambda_i(\tilde{A}_{22})$ are not changed by \tilde{L} .

However it can be shown that

We can arbitrarily assign the eigenvalues of $(A \parallel L C)$ by choice of L if and only if the system is observable.

- We can thus make the error, $\underline{e}(t) \rightarrow 0$ arbitrarily quickly.
- But high gains might imply very large transient errors and noisy estimates.

4.3 Tracking disturbances, ignoring noise

Imagine tracking aircraft by radar (1-D). Aircraft position z is affected by random turbulence.

Take $\underline{x} = [z, \dot{z}]^T$:

$$\dot{\underline{x}}(t) = A\underline{x}(t) + Bd(t) = \begin{bmatrix} 0 & 1 \\ 0 & 0 \end{bmatrix} \underline{x}(t) + \begin{bmatrix} 0 \\ 1 \end{bmatrix} d(t)$$

The radar measurement is corrupted by noise:

$$y(t) = C\underline{x}(t) + n(t) = [1 \quad 0]\underline{x}(t) + n(t)$$

Observer: $\hat{\underline{x}}(t) = A\hat{\underline{x}}(t) + L[y(t) - C\hat{\underline{x}}(t)]$ NB: $d(t)$ not known, so not used.

d large, n small: Believe the measurements. Use large L . React quickly.

d small, n large: Don't trust measurements, believe model. Use small L .

Smooth the measurements.

4.4 Kalman Filter

Assume we have measurements of $\underline{u}(t)$ and $\underline{y}(t)$ and the model

$$\dot{\underline{x}} = A\underline{x} + B(\underline{u} + \underline{d})$$

$$\underline{y} = C\underline{x} + \underline{n}$$

What are the *smallest* \underline{d} and \underline{n} , in terms of $(\int_0^T \underline{d}^T \underline{d} dt)^2 + (\int_0^T \underline{n}^T \underline{n} dt)^2$, which make the measurement consistent with the model, and what is the corresponding estimate of the state?

The solution is given by *Kalman Filter* theory, which gives an optimal trade-off between tracking \underline{d} and rejecting \underline{n} . The solution is a Luenberger observer with $L = -C^T$ where $\gamma > 0$ solves the quadratic matrix equation

$$A + A^T + BB^T \gamma C^T C = 0$$

(if the system is observable, then it can be shown that such a solution exists, is unique, and that the resulting observer is stable).

Generalises to arbitrary disturbance/noise spectra. Very widely used *Navigation & guidance, Telecomms, Control, Finance, ...*

Especially in discrete time. Software implementation *Matlab*: `kalman`, `dkalman`, `estimetc`.

4.5 Application to sensor fusion

Satellite, 1 axis of rotation: $J \dot{\theta} = u + d$ (u = control torque, d = disturbance torque).

Two noisy sensors: Star sensor: $y_1 = \theta + n$, Rate gyro: $y_2 = \dot{\theta} + n$

Let $\underline{x} = [\theta, \dot{\theta}]^T$. State-space model:

$$\begin{aligned}\underline{\dot{x}} &= \begin{bmatrix} 0 & 1 \\ 0 & 0 \end{bmatrix} \underline{x} + \begin{bmatrix} 0 & 0 \\ 1/J & 1/J \end{bmatrix} \begin{bmatrix} u \\ d \end{bmatrix} \\ \underline{y} &= \begin{bmatrix} 1 & 0 \\ 0 & 1 \end{bmatrix} \underline{x} + \begin{bmatrix} n \\ n \end{bmatrix} = I \underline{x} + \begin{bmatrix} n \\ n \end{bmatrix}\end{aligned}$$

Observable? Yes. ($C = I$, so $\text{rank } C = 2$, so $\text{rank } \begin{smallmatrix} C \\ CA \end{smallmatrix} = 2$.)

Observer:

$$\begin{aligned}\hat{\underline{x}} &= A \hat{\underline{x}} + B \begin{bmatrix} u \\ 0 \end{bmatrix} + L(y - \hat{y}) \quad (d \text{ not known}) \\ &= (A - LC) \hat{\underline{x}} + \begin{bmatrix} 0 \\ 1/J \end{bmatrix} u + Ly \quad \text{but } C = I \text{ so:} \\ &= \begin{bmatrix} \hat{p}_{11} & \hat{p}_{12} \\ \hat{p}_{21} & \hat{p}_{22} \end{bmatrix} \hat{\underline{x}} + \begin{bmatrix} 0 \\ 1/J \end{bmatrix} u + \begin{bmatrix} \hat{p}_{11} & \hat{p}_{12} \\ \hat{p}_{21} & \hat{p}_{22} \end{bmatrix} \underline{y}\end{aligned}$$

Place both eigenvalues at -10 (say): Using $\text{trace}(A - LC) = -20$ and $\det(A - LC) = 100$:

$\hat{p}_{11} + \hat{p}_{22} = -20$ and $\hat{p}_{11}\hat{p}_{22} - \hat{p}_{12}\hat{p}_{21} = 100$. This leaves some design freedom.

$\hat{p}_{11} = \hat{p}_{22} = -10$: Make $\hat{p}_{12} = \hat{p}_{21} = 0$.

$\hat{p}_{11} = \hat{p}_{22} = -10$: Make $\hat{p}_{12} = \hat{p}_{21} = 10$.

Optimal trade-off: *Kalman Filter* again.

4.6 Application to sensor bias estimation

Satellite, as before: $J \dot{\theta} = u$

Sensors: Star tracker measures angular position: $y_1 = \theta$

Rate gyro measures angular velocity with bias: $y_2 = \dot{\theta} + b$

Augment state vector: $\underline{x} = [\theta, \dot{\theta}, b]^T$, and assume bias is constant: $\dot{b} = 0$.

State-space model:

$$\begin{aligned}\underline{\dot{x}} &= \begin{bmatrix} 0 & 1 & 0 \\ 0 & 0 & 0 \\ 0 & 0 & 0 \end{bmatrix} \underline{x} + \begin{bmatrix} 0 \\ 1/J \\ 0 \end{bmatrix} u \\ \underline{y} &= \begin{bmatrix} 1 & 0 & 0 \\ 0 & 1 & 1 \end{bmatrix} \underline{x}\end{aligned}$$

Is the state observable?

$$\begin{aligned}C &= \begin{bmatrix} 1 & 0 & 0 \\ 0 & 1 & 1 \end{bmatrix} \\ CA &= \begin{bmatrix} 0 & 1 & 0 \\ 0 & 0 & 0 \end{bmatrix} \\ CA^2 &= \begin{bmatrix} 0 & 0 & 0 \\ 0 & 0 & 0 \end{bmatrix}\end{aligned}$$

First 3 rows are linearly independent (Or: All three columns are linearly independent).

So rank = 3. Hence: **Observable**. So can use observer to estimate \underline{x} :

$$\hat{\underline{x}} = A\hat{\underline{x}} + Bu + L(y - C\hat{\underline{x}})$$

$A - LC$ stable $\hat{x}_3 \rightarrow b$ as $t \rightarrow \infty$. Rate of convergence depends on eigenvalues of $A - LC$.